

## 16/32-Bit RISC Flash Microcontroller

### FEATURES

- High-Performance Static CMOS Technology
- TMS470R1x 16/32-Bit RISC Core (ARM7TDM™)
  - 60-MHz (Pipeline Mode)
  - Independent 16/32-Bit Instruction Set
  - Open Architecture With Third-Party Support
  - Built-In Debug Module
  - Utilizes Big-Endian Format
- Integrated Memory
  - 768K-Byte Program Flash
    - 3 Banks With 18 Contiguous Sectors
    - Internal State Machine for Programming and Erase
  - 48K-Byte Static RAM (SRAM)
- 15 Dedicated GIO Pins, 1 Input-Only GIO Pin, and 71 Additional Peripheral I/Os
- Operating Features
  - Core Supply Voltage ( $V_{CC}$ ): 1.81–2.05 V
  - I/O Supply Voltage ( $V_{CCIO}$ ): 3.0–3.6 V
  - Low-Power Modes: STANDBY and HALT
  - Extended Industrial Temperature Range
- 470+ System Module
  - 32-Bit Address Space Decoding
  - Bus Supervision for Memory and Peripherals
  - Analog Watchdog (AWD) Timer
  - Real-Time Interrupt (RTI)
  - System Integrity and Failure Detection
  - Interrupt Expansion Module (IEM)
- Direct Memory Access (DMA) Controller
  - 32 Control Packets and 16 Channels
- Zero-Pin Phase-Locked Loop (ZPLL)-Based Clock Module With Prescaler
  - Multiply-by-4 or -8 Internal ZPLL Option
  - ZPLL Bypass Mode
- Ten Communication Interfaces:
  - Five Serial Peripheral Interfaces (SPIs)
    - 255 Programmable Baud Rates
  - Two Serial Communications Interfaces (SCIs)
    - $2^{24}$  Selectable Baud Rates
    - Asynchronous/Isosynchronous Modes
  - Three High-End CAN Controllers (HECCs)
    - 32-Mailbox Capacity Each
    - Fully Compliant With CAN Protocol, Version 2.0B
- High-End Timer (HET)
  - 32 Programmable I/O Channels:
    - 24 High-Resolution Pins
    - 8 Standard-Resolution Pins
  - High-Resolution Share Feature (XOR)
  - High-End Timer RAM
    - 128-Instruction Capacity
- 16-Channel 10-Bit Multi-Buffered ADC (MibADC)
  - 256-Word FIFO Buffer
  - Single- or Continuous-Conversion Modes
  - 1.55- $\mu$ s Minimum Sample and Conversion Time
  - Calibration Mode and Self-Test Features
- Eight External Interrupts
- Flexible Interrupt Handling
- External Clock Prescale (ECP) Module
  - Programmable Low-Frequency External Clock (CLK)
- On-Chip Scan-Base Emulation Logic, IEEE Standard 1149.1<sup>(1)</sup> (JTAG) Test-Access Port
- 144-Pin Plastic Low-Profile Quad Flatpack (PGE Suffix)

<sup>(1)</sup> The test-access port is compatible with the IEEE Standard 1149.1-1990, *IEEE Standard Test-Access Port and Boundary Scan Architecture* specification. Boundary scan is not supported on this device.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

ARM7TDM is a trademark of Advanced RISC Machines Limited (ARM).  
All other trademarks are the property of their respective owners.

### TMS470R1B768 144-Pin PGE Package (Top View)

| Pin | Signal       | Pin | Signal            |
|-----|--------------|-----|-------------------|
| 1   | SPI1ENA      | 72  | AWD               |
| 2   | SPI1SCS      | 71  | HET[18]           |
| 3   | SPI1SIMO     | 70  | HET[19]           |
| 4   | SPI1SOMI     | 69  | HET[20]           |
| 5   | SPI1CLK      | 68  | HET[21]           |
| 6   | SPI4ENA      | 67  | HET[22]           |
| 7   | SPI4SCS      | 66  | SPI2SCS           |
| 8   | SPI4SIMO     | 65  | SPI2ENA           |
| 9   | SPI4SOMI     | 64  | SPI2SOMI          |
| 10  | SPI4CLK      | 63  | SPI2SIMO          |
| 11  | Vss          | 62  | SPI2CLK           |
| 12  | OSCO         | 61  | SPI5ENA           |
| 13  | OSCIN        | 60  | SPI5CLK           |
| 14  | Vcc          | 59  | SPI5SOMI          |
| 15  | RST          | 58  | SPI5SIMO          |
| 16  | Vssio        | 57  | CAN2HRX           |
| 17  | Vccio        | 56  | CAN2HTX           |
| 18  | IOD[3]       | 55  | Vcc               |
| 19  | IOD[2]       | 54  | Vss               |
| 20  | IOD[1]       | 53  | Vccio             |
| 21  | IOD[0]       | 52  | Vssio             |
| 22  | HET[17]      | 51  | HET[24]           |
| 23  | HET[16]      | 50  | HET[31]           |
| 24  | HET[15]      | 49  | HET[30]           |
| 25  | HET[14]      | 48  | HET[29]           |
| 26  | HET[13]      | 47  | HET[28]           |
| 27  | HET[12]      | 46  | SPI5SCS           |
| 28  | HET[11]      | 45  | SCI2CLK           |
| 29  | HET[10]      | 44  | SCI2TX            |
| 30  | Vss          | 43  | SCI2RX            |
| 31  | Vcc          | 42  | GIOA[3]/INT3      |
| 32  | PORRST       | 41  | GIOA[2]/INT2      |
| 33  | GIOA[7]/INT7 | 40  | GIOA[1]/INT1/ECLK |
| 34  | GIOA[6]/INT6 | 39  | GIOA[0]/INT0(A)   |
| 35  | GIOA[5]/INT5 | 38  | TEST              |
| 36  | GIOA[4]/INT4 | 37  | TRST              |
| 108 | ADIN[0]      | 109 | ADIN[11]          |
| 107 | ADIN[1]      | 110 | ADIN[14]          |
| 106 | ADIN[2]      | 111 | ADIN[10]          |
| 105 | ADIN[3]      | 112 | ADIN[13]          |
| 104 | ADIN[4]      | 113 | ADIN[9]           |
| 103 | ADIN[15]     | 114 | ADIN[12]          |
| 102 | ADIN[5]      | 115 | ADIN[8]           |
| 101 | ADIN[6]      | 116 | ADREFHI           |
| 100 | ADIN[7]      | 117 | ADREFLO           |
| 99  | ADEV         | 118 | VCCAD             |
| 98  | SPI3ENA      | 119 | VSSAD             |
| 97  | SPI3SCS      | 120 | TMS               |
| 96  | SPI3SIMO     | 121 | TMS2              |
| 95  | SPI3SOMI     | 122 | GIOC[0]           |
| 94  | SPI3CLK      | 123 | HET[23]           |
| 93  | Vcc          | 124 | HET[25]           |
| 92  | Vss          | 125 | HET[26]           |
| 91  | SCI1RX       | 126 | HET[27]           |
| 90  | SCI1TX       | 127 | Vss               |
| 89  | SCI1CLK      | 128 | Vcc               |
| 88  | CAN1HTX      | 129 | HET[0]            |
| 87  | CAN1HRX      | 130 | HET[1]            |
| 86  | Vcc          | 131 | Vss               |
| 85  | Vss          | 132 | Vcc               |
| 84  | GIOB[7]      | 133 | FLTP2             |
| 83  | CLKOUT       | 134 | FLTP1             |
| 82  | Vccio        | 135 | VCCP              |
| 81  | Vssio        | 136 | Vss               |
| 80  | HET[9]       | 137 | HET[2]            |
| 79  | HET[8]       | 138 | HET[3]            |
| 78  | CAN3HTX      | 139 | HET[4]            |
| 77  | CAN3HRX      | 140 | HET[5]            |
| 76  | TCK          | 141 | HET[6]            |
| 75  | TDO          | 142 | HET[7]            |
| 74  | TDI          | 143 | GIOC[1]           |
| 73  | PLLDIS       | 144 | GIOC[2]           |

A. GIOA[0]/INT0 (pin 39) is an input-only GIO pin.

## DESCRIPTION

The TMS470R1B768<sup>(1)</sup> device is a member of the Texas Instruments (TI) TMS470R1x family of general-purpose 16/32-bit reduced instruction set computer (RISC) microcontrollers. The B768 microcontroller offers high performance utilizing the high-speed ARM7TDMI 16/32-bit RISC central processing unit (CPU), resulting in a high instruction throughput while maintaining greater code efficiency. The ARM7TDMI 16/32-bit RISC CPU views memory as a linear collection of bytes numbered upwards from zero. The TMS470R1B768 utilizes the big-endian format where the most significant byte of a word is stored at the lowest numbered byte and the least significant byte at the highest numbered byte.

High-end embedded control applications demand more performance from their controllers while maintaining low costs. The B768 RISC core architecture offers solutions to these performance and cost demands while maintaining low power consumption.

The B768 device contains the following:

- ARM7TDMI 16/32-Bit RISC CPU
- TMS470R1x system module (SYS) with 470+ enhancements [including an interrupt expansion module (IEM) and a 16-channel direct-memory access (DMA) controller]
- 768K-byte flash
- 48K-byte SRAM
- Zero-pin phase-locked loop (ZPLL) clock module
- Analog watchdog (AWD) timer
- Real-time interrupt (RTI) module
- Five serial peripheral interface (SPI) modules
- Two serial communications interface (SCI) modules
- Three high-end CAN controller (HECC) modules
- 10-bit multi-buffered analog-to-digital converter (MibADC) with 16 input channels
- High-end timer (HET) controlling 32 I/Os
- External clock prescale (ECP) module
- Up to 86 I/O pins and 1 input-only pin

The functions performed by the 470+ system module (SYS) include:

- Address decoding
- Memory protection
- Memory and peripherals bus supervision
- Reset and abort exception management
- Expanded interrupt capability with prioritization for all internal interrupt sources
- Device clock control
- Direct-memory access (DMA) and control
- Parallel signature analysis (PSA)

This data sheet includes device-specific information such as memory and peripheral select assignment, interrupt priority, and a device memory map. For a more detailed functional description of the SYS module, see the *TMS470R1x System Module Reference Guide* (literature number SPNU189). For a more detailed functional description of the IEM module, see the *TMS470R1x Interrupt Expansion Module (IEM) Reference Guide* (literature number [SPNU211](#)). And for a more detailed functional description of the DMA module, see the *TMS470R1x Direct-Memory Access (DMA) Controller Reference Guide* (literature number [SPNU210](#)).

The B768 memory includes general-purpose SRAM supporting single-cycle read/write accesses in byte, half-word, and word modes.

The flash memory on this device is a nonvolatile, electrically erasable and programmable memory implemented with a 32-bit-wide data bus interface. The flash operates with a system clock frequency of up to 24 MHz. When in pipeline mode, the flash operates with a system clock frequency of up to 60 MHz. For more detailed information on the F05 devices flash, see the *F05 flash* section of this data sheet.

(1) Throughout the remainder of this document, TMS470R1B768 shall be referred to as either the full device name or B768.

The B768 device has ten communication interfaces: five SPIs, two SCIs, and three HECCs. The SPI provides a convenient method of serial interaction for high-speed communications between similar shift-register type devices. The SCI is a full-duplex, serial I/O interface intended for asynchronous communication between the CPU and other peripherals using the standard non-return-to-zero (NRZ) format. The HECC uses a serial, multimaster communication protocol that efficiently supports distributed real-time control with robust communication rates of up to 1 megabit per second (Mbps). The HECC is ideal for applications operating in noisy and harsh environments (e.g., industrial fields) that require reliable serial communication or multiplexed wiring. For more detailed functional information on the SPI, SCI, and HECC, see the specific reference guides for these modules (literature numbers [SPNU195](#), [SPNU196](#), and [SPNU197](#), respectively).

The HET is an advanced intelligent timer that provides sophisticated timing functions for real-time applications. The timer is software controlled, using a reduced instruction set, with a specialized timer micromachine and an attached I/O port. The HET can be used for compare, capture, or general-purpose I/O. It is especially well suited for applications requiring multiple sensor information and drive actuators with complex and accurate time pulses. For more detailed functional information on the HET, see the *TMS470R1x High-End Timer (HET) Reference Guide* (literature number [SPNU199](#)).

The B768 HET peripheral contains the XOR-share feature. This feature allows two adjacent HET high-resolution channels to be XORed together, making it possible to output smaller pulses than a standard HET. For more detailed information on the HET XOR-share feature, see the *TMS470R1x High-End Timer (HET) Reference Guide* (literature number [SPNU199](#)).

The B768 device has a 10-bit-resolution, 16-channel sample-and-hold MibADC. The MibADC channels can be converted individually or can be grouped by software for sequential conversion sequences. There are three separate groupings, two of which are triggerable by an external event. Each sequence can be converted once when triggered or configured for continuous conversion mode. For more detailed functional information on the MibADC, see the *TMS470R1x Multi-Buffered Analog-to-Digital Converter (MibADC) Reference Guide* (literature number [SPNU206](#)).

The zero-pin phase-locked loop (ZPLL) clock module contains a phase-locked loop, a clock-monitor circuit, a clock-enable circuit, and a prescaler (with prescale values of 1–8). The function of the ZPLL is to multiply the external frequency reference to a higher frequency for internal use. The ZPLL provides ACLK to the system (SYS) module. The SYS module subsequently provides system clock (SYSCLK), real-time interrupt clock (RTICLK), CPU clock (MCLK), and peripheral interface clock (ICLK) to all other B768 device modules. For more detailed functional information on the ZPLL, see the *TMS470R1x Zero-Pin Phase-Locked Loop (ZPLL) Clock Module Reference Guide* (literature number [SPNU212](#)).

#### NOTE:

ACLK should not be confused with the MibADC internal clock, ADCLK. ACLK is the continuous system clock from an external resonator/crystal reference.

The B768 device also has an external clock prescaler (ECP) module that when enabled, outputs a continuous external clock (ECLK) on a specified GIO pin. The ECLK frequency is a user-programmable ratio of the peripheral interface clock (ICLK) frequency. For more detailed functional information on the ECP, see the *TMS470R1x External Clock Prescaler (ECP) Reference Guide* (literature number [SPNU202](#)).


## Device Characteristics

[Table 1](#) identifies all the characteristics of the TMS470R1B768 device except the SYSTEM and CPU, which are generic.

**Table 1. Device Characteristics**

| CHARACTERISTICS                                                                                                                                                                                                                                                                                            | DEVICE DESCRIPTION<br>TMS470R1B768 | COMMENTS For B768                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MEMORY</b>                                                                                                                                                                                                                                                                                              |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| For the number of memory selects on this device, see <a href="#">Table 3</a> , <i>Memory Selection Assignment</i> .                                                                                                                                                                                        |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| INTERNAL MEMORY                                                                                                                                                                                                                                                                                            | Pipeline/non-pipeline              | Flash is pipeline-capable.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                                                                                                                                                            | 768K-byte flash<br>48K-byte SRAM   | The B768 RAM is implemented in one 48K array selected by two memory-select signals (see <a href="#">Table 3</a> , <i>Memory Selection Assignment</i> ).                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>PERIPHERALS</b>                                                                                                                                                                                                                                                                                         |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| For the device-specific interrupt priority configurations, see <a href="#">Table 7</a> , <i>Interrupt Priority (IEM and CIM)</i> . And for the 1K peripheral address ranges and their peripheral selects, see <a href="#">Table 5</a> , <i>B768 Peripherals, System Module, and Flash Base Addresses</i> . |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| CLOCK                                                                                                                                                                                                                                                                                                      | ZPLL                               | Zero-pin PLL has no external loop filter pins.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| GENERAL-PURPOSE I/Os                                                                                                                                                                                                                                                                                       | 15 I/O<br>1 input only             | Port A has eight (8) external pins, port B has one (1), port C has three (3), and port D has four (4).                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| ECP                                                                                                                                                                                                                                                                                                        | YES                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| SCI                                                                                                                                                                                                                                                                                                        | 2 (3 pin)                          | SCI1 and SCI2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| CAN (HECC and/or SCC)                                                                                                                                                                                                                                                                                      | 3 HECCs                            | Three HECCs (HECC1, HECC2, and HECC3)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| SPI (5-pin, 4-pin or 3-pin)                                                                                                                                                                                                                                                                                | 5 (5 pin)                          | SPI1, SPI2, SPI3, SPI4, and SPI5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| HET with XOR Share                                                                                                                                                                                                                                                                                         | 32 I/O                             | The B768 device has both the logic and registers for a full 32-I/O HET implemented and all 32 pins are available externally.<br>The high-resolution (HR) SHARE feature allows even HR pins to share the next higher odd HR pin structures. This HR sharing is independent of whether or not the odd pin is available externally. If an odd pin is available externally and shared, then the odd pin can only be used as a general-purpose I/O. For more information on HR SHARE, see the <i>TMS470R1x High-End Timer (HET) Reference Guide</i> (literature number SPNU199). |
| HET RAM                                                                                                                                                                                                                                                                                                    | 128-instruction capacity           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| MibADC                                                                                                                                                                                                                                                                                                     | 10-bit, 16-channel, 256-word FIFO  | The B768 device has both the logic and registers for a full 16-channel MibADC implemented and all 16 pins are available externally.                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| CORE VOLTAGE                                                                                                                                                                                                                                                                                               | 1.81V to 2.05 V                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| I/O VOLTAGE                                                                                                                                                                                                                                                                                                | 3.0 V to 3.6 V                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| PINS                                                                                                                                                                                                                                                                                                       | 144                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| PACKAGE                                                                                                                                                                                                                                                                                                    | PGE                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## Functional Block Diagram

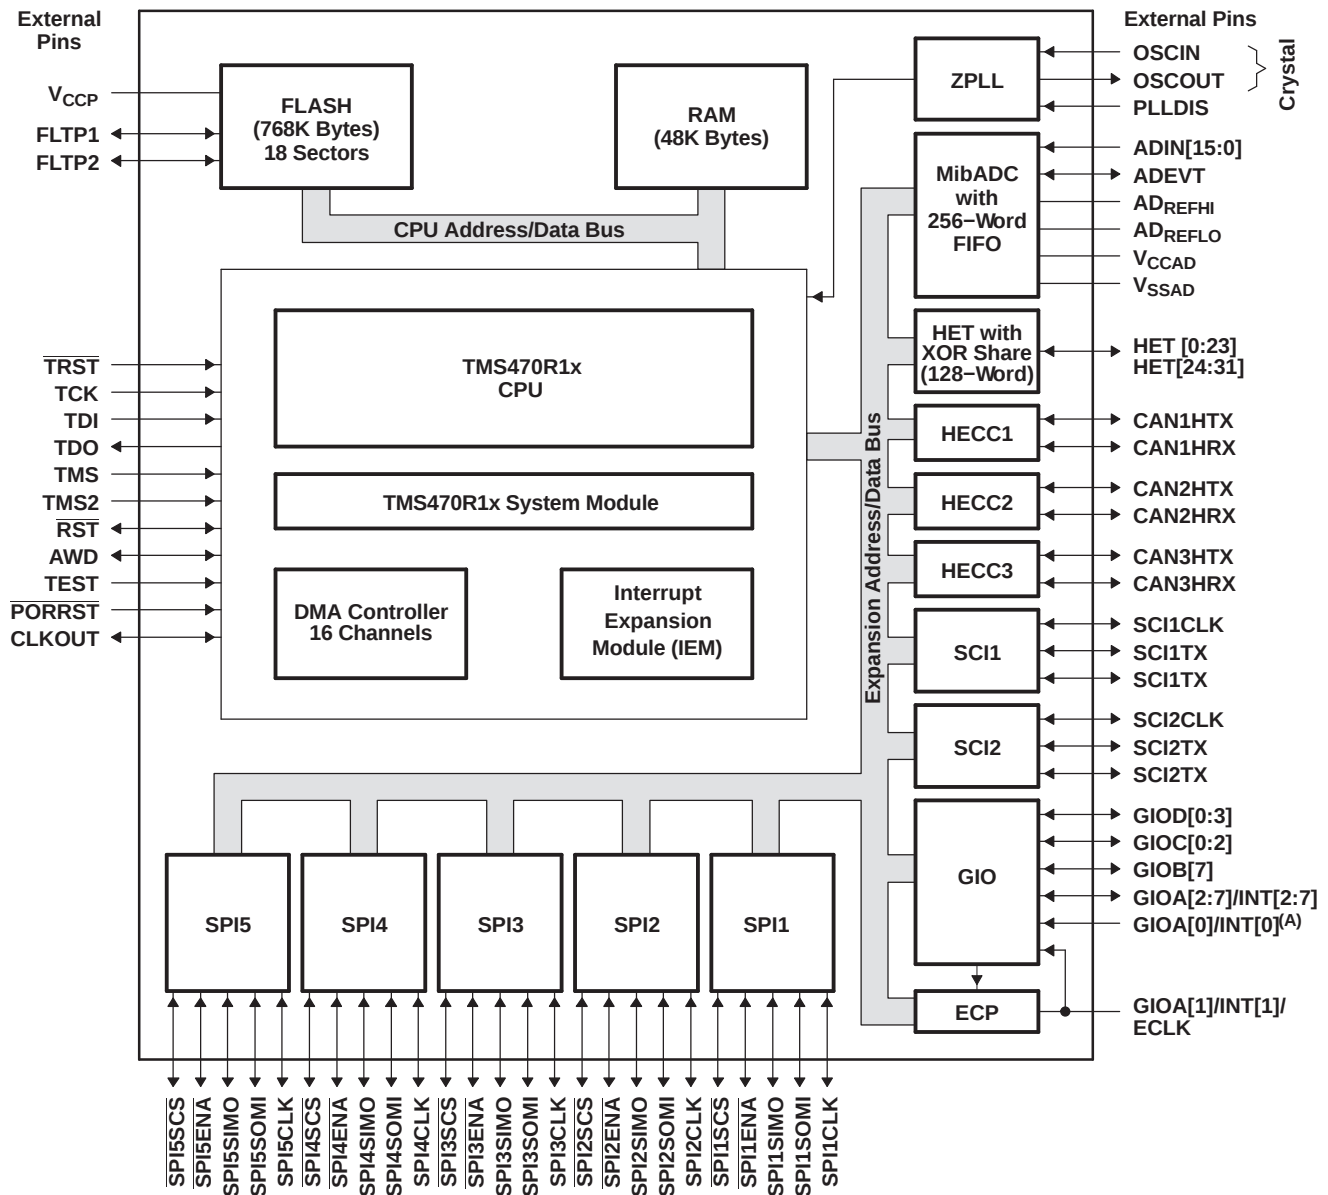

A. GIOA[0]/INT[0] is an input-only GIO pin.

**Table 2. Terminal Functions**

| TERMINAL                          |     | TYPE <sup>(1)(2)</sup> | INTERNAL<br>PULLUP/<br>PULLDOWN <sup>(3)</sup> | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------|-----|------------------------|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                              | NO. |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HIGH-END TIMER (HET)              |     |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[0]                            | 129 | 3.3-V I/O              | IPD (20 μA)                                    | <p>The B768 device has both the logic and registers for a full 32-I/O HET implemented and all 32 pins are available externally.</p> <p>Timer input capture or output compare. The HET[31:0] applicable pins can be programmed as general-purpose input/output (GIO) pins. HET[23:0] are high-resolution pins and HET[31:24] are standard-resolution pins.</p> <p>The high-resolution (HR) SHARE feature allows even HR pins to share the next higher odd-numbered HR pin structures. This HR sharing is independent of whether or not the odd pin is available externally. If an odd pin is available externally and shared, then the odd pin can only be used as a general-purpose I/O. For more information on HR SHARE, see the <i>TMS470R1x High-End Timer (HET) Reference Guide</i> (literature number SPNU199).</p> |
| HET[1]                            | 130 |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[2]                            | 137 |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[3]                            | 138 |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[4]                            | 139 |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[5]                            | 140 |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[6]                            | 141 |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[7]                            | 142 |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[8]                            | 79  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[9]                            | 80  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[10]                           | 29  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[11]                           | 28  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[12]                           | 27  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[13]                           | 26  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[14]                           | 25  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[15]                           | 24  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[16]                           | 23  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[17]                           | 22  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[18]                           | 71  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[19]                           | 70  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[20]                           | 69  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[21]                           | 68  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[22]                           | 67  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[23]                           | 123 |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[24]                           | 51  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[25]                           | 124 |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[26]                           | 125 |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[27]                           | 126 |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[28]                           | 47  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[29]                           | 48  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[30]                           | 49  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HET[31]                           | 50  |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HIGH-END CAN CONTROLLER 1 (HECC1) |     |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| CAN1HTX                           | 88  | 3.3-V I/O              | IPU (20 μA)                                    | HECC1 transmit pin or GIO pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| CAN1HRX                           | 87  | 3.3-V I/O              |                                                | HECC1 receive pin or GIO pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| HIGH-END CAN CONTROLLER 2 (HECC2) |     |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| CAN2HTX                           | 56  | 3.3-V I/O              | IPU (20 μA)                                    | HECC2 transmit pin or GIO pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| CAN2HRX                           | 57  | 3.3-V I/O              |                                                | HECC2 receive pin or GIO pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| HIGH-END CAN CONTROLLER 3 (HECC3) |     |                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| CAN3HTX                           | 78  | 3.3 V I/O              | IPU (20 μA)                                    | HECC3 transmit pin or GIO pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| CAN3HRX                           | 77  | 3.3 V I/O              |                                                | HECC3 receive pin or GIO pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

(1) I = input, O = output, PWR = power, GND = ground, REF = reference voltage, NC = no connect

(2) All I/O pins, except  $\overline{RST}$ , are configured as inputs while  $\overline{PORRST}$  is low and immediately after  $\overline{PORRST}$  goes high.

(3) IPD = internal pulldown, IPU = internal pullup (all internal pullups and pulldowns are active on input pins, independent of the  $\overline{PORRST}$  state.)

**Table 2. Terminal Functions (continued)**

| TERMINAL                                            |     | TYPE <sup>(1)(2)</sup> | INTERNAL<br>PULLUP/<br>PULLDOWN <sup>(3)</sup> | DESCRIPTION                                                                                                                                                                                                                                           |
|-----------------------------------------------------|-----|------------------------|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                                                | NO. |                        |                                                |                                                                                                                                                                                                                                                       |
| GENERAL-PURPOSE I/O (GIO)                           |     |                        |                                                |                                                                                                                                                                                                                                                       |
| GIOA[0]/INT0                                        | 39  | 3.3-V I                | IPD (20 μA)                                    | General-purpose input/output pins.<br>GIOA[0]/INT0 is an input-only pin. GIOA[7:0]/INT[7:0] are interrupt-capable pins.<br>The GIOA[1]/INT1/ECLK pin is multiplexed with the external clock-out function of the external clock prescale (ECP) module. |
| GIOA[1]/INT1 /ECLK                                  | 40  | 3.3-V I/O              |                                                |                                                                                                                                                                                                                                                       |
| GIOA[2]/INT2                                        | 41  |                        |                                                |                                                                                                                                                                                                                                                       |
| GIOA[3]/INT3                                        | 42  |                        |                                                |                                                                                                                                                                                                                                                       |
| GIOA[4]/INT4                                        | 36  |                        |                                                |                                                                                                                                                                                                                                                       |
| GIOA[5]/INT5                                        | 35  |                        |                                                |                                                                                                                                                                                                                                                       |
| GIOA[6]/INT6                                        | 34  |                        |                                                |                                                                                                                                                                                                                                                       |
| GIOA[7]/INT7                                        | 33  |                        |                                                |                                                                                                                                                                                                                                                       |
| GIOB[7]                                             | 84  |                        |                                                |                                                                                                                                                                                                                                                       |
| GIOC[0]                                             | 122 |                        |                                                |                                                                                                                                                                                                                                                       |
| GIOC[1]                                             | 143 |                        |                                                |                                                                                                                                                                                                                                                       |
| GIOC[2]                                             | 144 |                        |                                                |                                                                                                                                                                                                                                                       |
| GIOD[0]                                             | 21  |                        |                                                |                                                                                                                                                                                                                                                       |
| GIOD[1]                                             | 20  |                        |                                                |                                                                                                                                                                                                                                                       |
| GIOD[2]                                             | 19  |                        |                                                |                                                                                                                                                                                                                                                       |
| GIOD[3]                                             | 18  |                        |                                                |                                                                                                                                                                                                                                                       |
| MULTI-BUFFERED ANALOG-TO-DIGITAL CONVERTER (MibADC) |     |                        |                                                |                                                                                                                                                                                                                                                       |
| ADEVT                                               | 99  | 3.3-V I/O              | IPD (20 μA)                                    | MibADC event input. ADEVT can be programmed as a GIO pin.                                                                                                                                                                                             |
| ADIN[0]                                             | 108 | 3.3-V I                |                                                | MibADC analog input pins                                                                                                                                                                                                                              |
| ADIN[1]                                             | 107 |                        |                                                |                                                                                                                                                                                                                                                       |
| ADIN[2]                                             | 106 |                        |                                                |                                                                                                                                                                                                                                                       |
| ADIN[3]                                             | 105 |                        |                                                |                                                                                                                                                                                                                                                       |
| ADIN[4]                                             | 104 |                        |                                                |                                                                                                                                                                                                                                                       |
| ADIN[5]                                             | 102 |                        |                                                |                                                                                                                                                                                                                                                       |
| ADIN[6]                                             | 101 |                        |                                                |                                                                                                                                                                                                                                                       |
| ADIN[7]                                             | 100 |                        |                                                |                                                                                                                                                                                                                                                       |
| ADIN[8]                                             | 115 |                        |                                                |                                                                                                                                                                                                                                                       |
| ADIN[9]                                             | 113 |                        |                                                |                                                                                                                                                                                                                                                       |
| ADIN[10]                                            | 111 |                        |                                                |                                                                                                                                                                                                                                                       |

**Table 2. Terminal Functions (continued)**

| TERMINAL                                                        |     | TYPE <sup>(1)(2)</sup> | INTERNAL<br>PULLUP/<br>PULLDOWN <sup>(3)</sup> | DESCRIPTION                                                            |
|-----------------------------------------------------------------|-----|------------------------|------------------------------------------------|------------------------------------------------------------------------|
| NAME                                                            | NO. |                        |                                                |                                                                        |
| MULTI-BUFFERED ANALOG-TO-DIGITAL CONVERTER (MibADC) (CONTINUED) |     |                        |                                                |                                                                        |
| ADIN[11]                                                        | 109 | 3.3-V I                |                                                | MibADC analog input pins                                               |
| ADIN[12]                                                        | 114 |                        |                                                |                                                                        |
| ADIN[13]                                                        | 112 |                        |                                                |                                                                        |
| ADIN[14]                                                        | 110 |                        |                                                |                                                                        |
| ADIN[15]                                                        | 103 |                        |                                                |                                                                        |
| AD <sub>REFHI</sub>                                             | 116 | 3.3-V<br>REF I         |                                                | MibADC module high-voltage reference input                             |
| AD <sub>REFLO</sub>                                             | 117 | GND<br>REF I           |                                                | MibADC module low-voltage reference input                              |
| V <sub>CCAD</sub>                                               | 118 | 3.3-V<br>PWR           |                                                | MibADC analog supply voltage                                           |
| V <sub>SSAD</sub>                                               | 119 | GND                    |                                                | MibADC analog ground reference                                         |
| SERIAL PERIPHERAL INTERFACE 1 (SPI1)                            |     |                        |                                                |                                                                        |
| SPI1CLK                                                         | 5   | 3.3-V I/O              | IPD (20 μA)                                    | SPI1 clock. SPI1CLK can be programmed as a GIO pin.                    |
| SPI1ENA                                                         | 1   |                        |                                                | SPI1 chip enable. SPI1ENA can be programmed as a GIO pin.              |
| SPI1SCS                                                         | 2   |                        |                                                | SPI1 slave chip select. SPI1SCS can be programmed as a GIO pin.        |
| SPI1SIMO                                                        | 3   |                        |                                                | SPI1 data stream. Slave in/master out. Can be programmed as a GIO pin. |
| SPI1SOMI                                                        | 4   |                        |                                                | SPI1 data stream. Slave out/master in. Can be programmed as a GIO pin. |
| SERIAL PERIPHERAL INTERFACE 2 (SPI2)                            |     |                        |                                                |                                                                        |
| SPI2CLK                                                         | 62  | 3.3-V I/O              | IPD (20 μA)                                    | SPI2 clock. SPI2CLK can be programmed as a GIO pin.                    |
| SPI2ENA                                                         | 65  |                        |                                                | SPI2 chip enable. SPI2ENA can be programmed as a GIO pin.              |
| SPI2SCS                                                         | 66  |                        |                                                | SPI2 slave chip select. SPI2SCS can be programmed as a GIO pin.        |
| SPI2SIMO                                                        | 63  |                        |                                                | SPI2 data stream. Slave in/master out. Can be programmed as a GIO pin. |
| SPI2SOMI                                                        | 64  |                        |                                                | SPI2 data stream. Slave out/master in. Can be programmed as a GIO pin. |
| SERIAL PERIPHERAL INTERFACE 3 (SPI3)                            |     |                        |                                                |                                                                        |
| SPI3CLK                                                         | 94  | 3.3-V I/O              | IPD (20 μA)                                    | SPI3 clock. SPI3CLK can be programmed as a GIO pin.                    |
| SPI3ENA                                                         | 98  |                        |                                                | SPI3 chip enable. SPI3ENA can be programmed as a GIO pin.              |
| SPI3SCS                                                         | 97  |                        |                                                | SPI3 slave chip select. SPI3SCS can be programmed as a GIO pin.        |
| SPI3SIMO                                                        | 96  |                        |                                                | SPI3 data stream. Slave in/master out. Can be programmed as a GIO pin. |
| SPI3SOMI                                                        | 95  |                        |                                                | SP3 data stream. Slave out/master in. Can be programmed as a GIO pin.  |
| SERIAL PERIPHERAL INTERFACE 4 (SPI4)                            |     |                        |                                                |                                                                        |
| SPI4CLK                                                         | 10  | 3.3-V I/O              | IPD (20 μA)                                    | SPI4 clock. SPI4CLK can be programmed as a GIO pin.                    |
| SPI4ENA                                                         | 6   |                        |                                                | SPI4 chip enable. SPI4ENA can be programmed as a GIO pin.              |
| SPI4SCS                                                         | 7   |                        |                                                | SPI4 slave chip select. SPI4SCS can be programmed as a GIO pin.        |
| SPI4SIMO                                                        | 8   |                        |                                                | SPI4 data stream. Slave in/master out. Can be programmed as a GIO pin. |
| SPI4SOMI                                                        | 9   |                        |                                                | SPI4 data stream. Slave out/master in. Can be programmed as a GIO pin. |

**Table 2. Terminal Functions (continued)**

| TERMINAL                                 |     | TYPE <sup>(1)(2)</sup> | INTERNAL PULLUP/ PULLDOWN <sup>(3)</sup> | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------------------|-----|------------------------|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                                     | NO. |                        |                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| SERIAL PERIPHERAL INTERFACE 5 (SPI5)     |     |                        |                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| SPI5CLK                                  | 60  | 3.3-V I/O              | IPD (20 μA)                              | SPI5 clock. SPI5CLK can be programmed as a GIO pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| SPI5ENĀ                                  | 61  |                        |                                          | SPI5 chip enable. SPI5ENĀ can be programmed as a GIO pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| SPI5SCS                                  | 46  |                        |                                          | SPI5 slave chip select. SPI5SCS can be programmed as a GIO pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| SPI5SIMO                                 | 58  |                        |                                          | SPI5 data stream. Slave in/master out. Can be programmed as a GIO pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| SPI5SOMI                                 | 59  |                        |                                          | SPI5 data stream. Slave out/master in. Can be programmed as a GIO pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| ZERO-PIN PHASE-LOCKED LOOP (ZPLL)        |     |                        |                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| OSCIN                                    | 13  | 1.8-V I                |                                          | Crystal connection pin or external clock input                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| OSCOU                                    | 12  | 1.8-V O                |                                          | External crystal connection pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| PLLDIS                                   | 73  | 3.3-V I                | IPD (20 μA)                              | Enable/disable the ZPLL. The ZPLL can be bypassed and the oscillator becomes the system clock. If not in bypass mode, TI recommends that this pin be connected to ground or pulled down to ground by an external resistor.                                                                                                                                                                                                                                                                                                                                                                        |
| SERIAL COMMUNICATIONS INTERFACE 1 (SCI1) |     |                        |                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| SCI1CLK                                  | 89  | 3.3-V I/O              | IPD (20 μA)                              | SCI1 clock. SCI1CLK can be programmed as a GIO pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| SCI1RX                                   | 91  | 3.3-V I/O              | IPU (20 μA)                              | SCI1 data receive. SCI1RX can be programmed as a GIO pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| SCI1TX                                   | 90  | 3.3-V I/O              | IPU (20 μA)                              | SCI1 data transmit. SCI1TX can be programmed as a GIO pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| SERIAL COMMUNICATIONS INTERFACE 2 (SCI2) |     |                        |                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| SCI2CLK                                  | 45  | 3.3-V I/O              | IPD (20 μA)                              | SCI2 clock. SCI2CLK can be programmed as a GIO pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| SCI2RX                                   | 43  | 3.3-V I/O              | IPU (20 μA)                              | SCI2 data receive. SCI2RX can be programmed as a GIO pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| SCI2TX                                   | 44  | 3.3-V I/O              | IPU (20 μA)                              | SCI2 data transmit. SCI2TX can be programmed as a GIO pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| SYSTEM MODULE (SYS)                      |     |                        |                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| CLKOUT                                   | 83  | 3.3-V I/O              | IPD (20 μA)                              | Bidirectional pin. CLKOUT can be programmed as a GIO pin or the output of SYSCLK, ICLK, or MCLK.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| PORRST                                   | 32  | 3.3-V I                | IPD (20 μA)                              | Input master chip power-up reset. External V <sub>CC</sub> monitor circuitry must assert a power-on reset.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| RST                                      | 15  | 3.3-V I/O              | IPU (20 μA)                              | Bidirectional reset. The internal circuitry can assert a reset, and an external system reset can assert a device reset.<br>On this pin, the output buffer is implemented as an open drain (drives low only). To ensure an external reset is not arbitrarily generated, TI recommends that an external pullup resistor be connected to this pin.                                                                                                                                                                                                                                                   |
| WATCHDOG/REAL-TIME INTERRUPT (WD/RTI)    |     |                        |                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| AWD                                      | 72  | 3.3-V I/O              | IPD (20 μA)                              | Analog watchdog reset. The AWD pin provides a system reset if the WD KEY is not written in time by the system, providing an external RC network circuit is connected. If the user is not using AWD, TI recommends that this pin be connected to ground or pulled down to ground by an external resistor.<br>For more details on the external RC network circuit, see the <i>TMS470R1x System Module Reference Guide</i> (literature number SPNU189) and the application note <i>Analog Watchdog Resistor, Capacitor and Discharge Interval Selection Constraints</i> (literature number SPNA005). |
| TEST/DEBUG (T/D)                         |     |                        |                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| TCK                                      | 76  | 3.3-V I                | IPD (20 μA)                              | Test clock. TCK controls the test hardware (JTAG).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| TDI                                      | 74  | 3.3-V I                | IPU (20 μA)                              | Test data in. TDI inputs serial data to the test instruction register, test data register, and programmable test address (JTAG).                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| TDO                                      | 75  | 3.3-V O                | IPD (20 μA)                              | Test data out. TDO outputs serial data from the test instruction register, test data register, identification register, and programmable test address (JTAG).                                                                                                                                                                                                                                                                                                                                                                                                                                     |


**Table 2. Terminal Functions (continued)**

| TERMINAL                           |     | TYPE <sup>(1)(2)</sup> | INTERNAL<br>PULLUP/<br>PULLDOWN <sup>(3)</sup> | DESCRIPTION                                                                                                                                                           |
|------------------------------------|-----|------------------------|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                               | NO. |                        |                                                |                                                                                                                                                                       |
| TEST/DEBUG (T/D) (CONTINUED)       |     |                        |                                                |                                                                                                                                                                       |
| TEST                               | 38  | 3.3-V I                | IPD (20 μA)                                    | Test enable. Reserved for internal use only. TI recommends that this pin be connected to ground or pulled down to ground by an external resistor.                     |
| TMS                                | 120 | 3.3-V I                | IPU (20 μA)                                    | Serial input for controlling the state of the CPU test access port (TAP) controller (JTAG)                                                                            |
| TMS2                               | 121 | 3.3-V I                | IPU (20 μA)                                    | Serial input for controlling the second TAP. TI recommends that this pin be connected to V <sub>CCIO</sub> or pulled up to V <sub>CCIO</sub> by an external resistor. |
| TRST                               | 37  | 3.3-V I                | IPD (20 μA)                                    | Test hardware reset to TAP1 and TAP2. IEEE Standard 1149-1 (JTAG) Boundary-Scan Logic. TI recommends that this pin be pulled down to ground by an external resistor.  |
| FLASH                              |     |                        |                                                |                                                                                                                                                                       |
| FLTP1                              | 134 | NC                     |                                                | Flash test pad 1. <b>For proper operation, this pin must not be connected [no connect (NC)].</b>                                                                      |
| FLTP2                              | 133 | NC                     |                                                | Flash test pad 2. <b>For proper operation, this pin must not be connected [no connect (NC)].</b>                                                                      |
| V <sub>CCP</sub>                   | 135 | 3.3-V PWR              |                                                | Flash external pump voltage (3.3 V). This pin is required for both flash read and flash program and erase operations.                                                 |
| SUPPLY VOLTAGE CORE (1.8 V)        |     |                        |                                                |                                                                                                                                                                       |
| V <sub>CC</sub>                    | 14  | 1.8-V PWR              |                                                | Core logic supply voltage                                                                                                                                             |
|                                    | 31  |                        |                                                |                                                                                                                                                                       |
|                                    | 55  |                        |                                                |                                                                                                                                                                       |
|                                    | 86  |                        |                                                |                                                                                                                                                                       |
|                                    | 93  |                        |                                                |                                                                                                                                                                       |
|                                    | 128 |                        |                                                |                                                                                                                                                                       |
|                                    | 132 |                        |                                                |                                                                                                                                                                       |
| SUPPLY VOLTAGE DIGITAL I/O (3.3 V) |     |                        |                                                |                                                                                                                                                                       |
| V <sub>CCIO</sub>                  | 17  | 3.3-V PWR              |                                                | Digital I/O supply voltage                                                                                                                                            |
|                                    | 53  |                        |                                                |                                                                                                                                                                       |
|                                    | 82  |                        |                                                |                                                                                                                                                                       |
| SUPPLY GROUND CORE                 |     |                        |                                                |                                                                                                                                                                       |
| V <sub>SS</sub>                    | 11  | GND                    |                                                | Core supply ground reference                                                                                                                                          |
|                                    | 30  |                        |                                                |                                                                                                                                                                       |
|                                    | 54  |                        |                                                |                                                                                                                                                                       |
|                                    | 85  |                        |                                                |                                                                                                                                                                       |
|                                    | 92  |                        |                                                |                                                                                                                                                                       |
|                                    | 127 |                        |                                                |                                                                                                                                                                       |
|                                    | 131 |                        |                                                |                                                                                                                                                                       |
|                                    | 136 |                        |                                                |                                                                                                                                                                       |
| SUPPLY GROUND DIGITAL I/O          |     |                        |                                                |                                                                                                                                                                       |
| V <sub>SSIO</sub>                  | 16  | GND                    |                                                | Digital I/O supply ground reference                                                                                                                                   |
|                                    | 52  |                        |                                                |                                                                                                                                                                       |
|                                    | 81  |                        |                                                |                                                                                                                                                                       |

## B768 DEVICE-SPECIFIC INFORMATION

## Memory

Figure 1 shows the memory map of the B768 device.

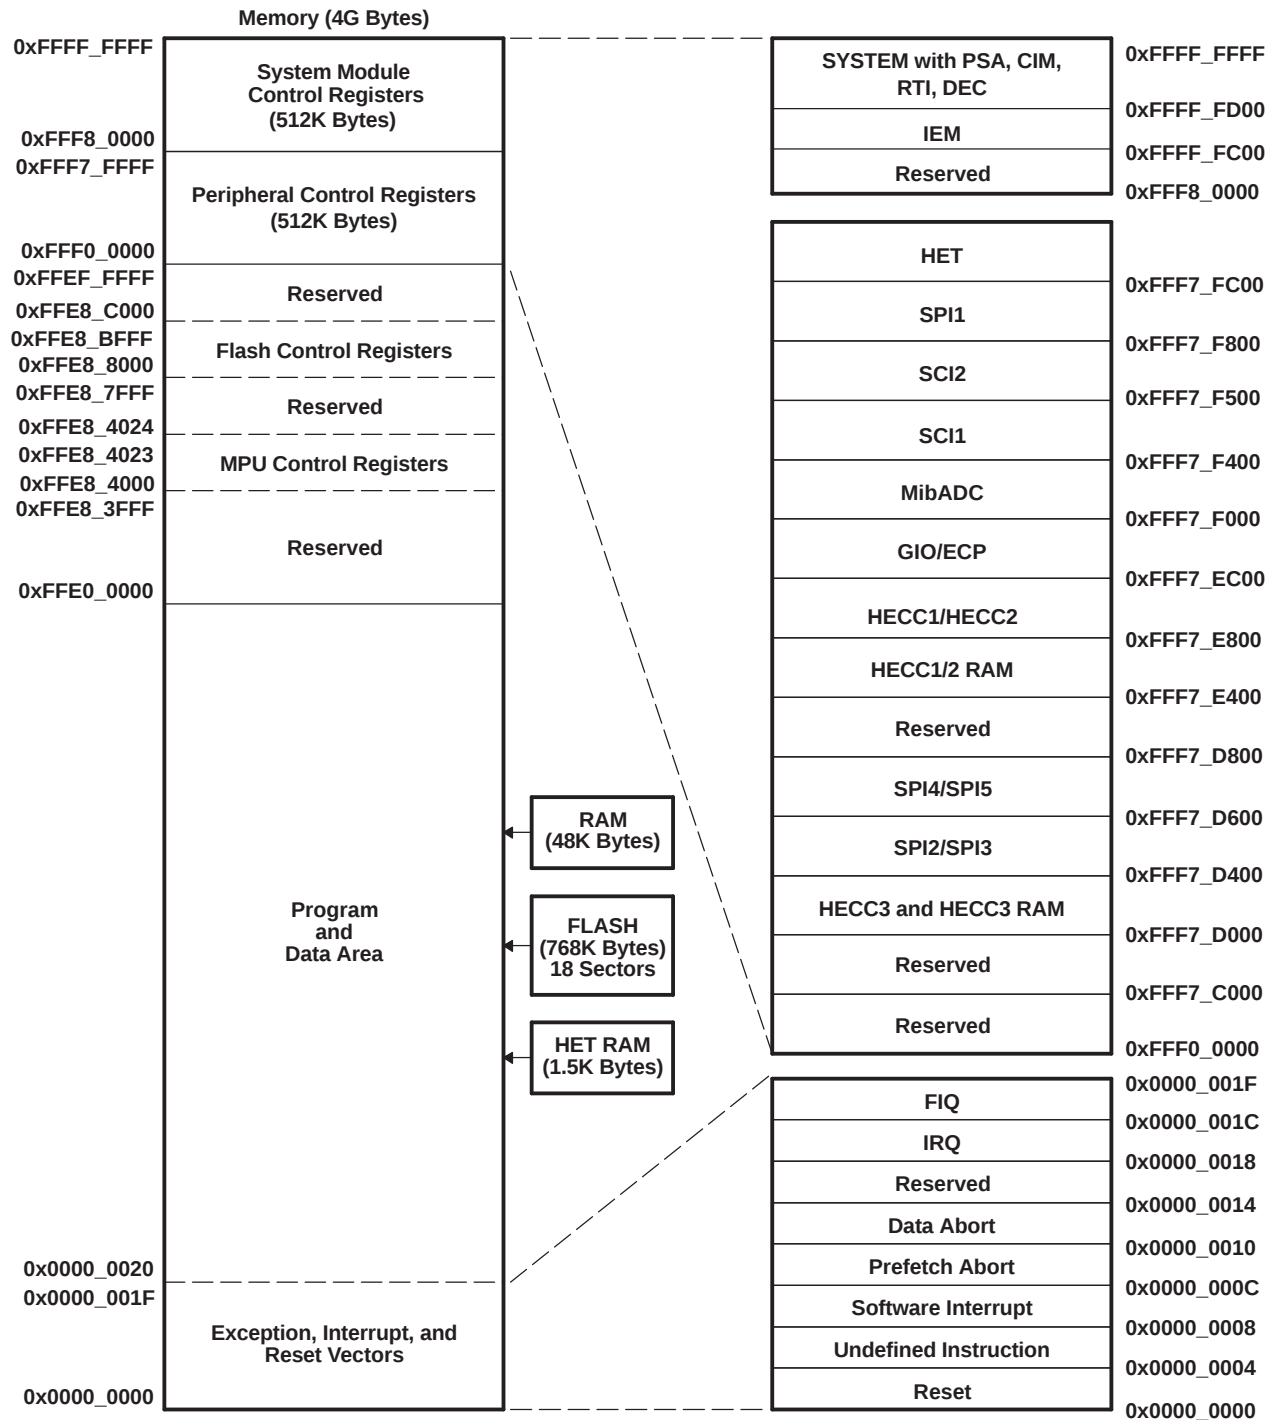

- A. Memory addresses are configurable by the system (SYS) module within the range of 0x0000\_0000 to 0xFFE0\_0000.
- B. The CPU registers are not part of the memory map.

### Figure 1. TMS470R1B768 Memory Map

## Memory Selects

Memory selects allow the user to address memory arrays (i.e., flash, RAM, and HET RAM) at user-defined addresses. Each memory select has its own set (low and high) of memory base address registers (MFBAHRx and MFBALRx) that, together, define the array's starting (base) address, block size, and protection.

The base address of each memory select is configurable to any memory address boundary that is a multiple of the decoded block size. For more information on how to control and configure these memory select registers, see the bus structure and memory sections of the *TMS470R1x System Module Reference Guide* (literature number SPNU189).

For the memory selection assignments and the memory selected, see [Table 3](#).

**Table 3. Memory Selection Assignment**

| MEMORY SELECT | MEMORY SELECTED (ALL INTERNAL) | MEMORY SIZE        | MPU | MEMORY BASE ADDRESS REGISTER | STATIC MEM CTL REGISTER |
|---------------|--------------------------------|--------------------|-----|------------------------------|-------------------------|
| 0 (fine)      | FLASH                          | 768K               | NO  | MFBAHR0 and MFBALR0          |                         |
| 1 (fine)      | FLASH                          |                    | NO  | MFBAHR1 and MFBALR1          |                         |
| 2 (fine)      | RAM                            | 48K <sup>(1)</sup> | YES | MFBAHR2 and MFBALR2          |                         |
| 3 (fine)      | RAM                            |                    | YES | MFBAHR3 and MFBALR3          |                         |
| 4 (fine)      | HET RAM                        | 1.5K               |     | MFBAHR4 and MFBALR4          | SMCR1                   |

(1) The starting addresses for both RAM memory-select signals cannot be offset from each other by a multiple of the user-defined block size in the memory-base address register.

## RAM

The B768 device contains 48K bytes of internal static RAM configurable by the SYS module to be addressed within the range of 0x0000\_0000 to 0xFFE0\_0000. This B768 RAM is implemented in one 48K-byte array selected by two memory-select signals. This B768 configuration imposes an additional constraint on the memory map for RAM; the starting addresses for both RAM memory selects cannot be offset from each other by the multiples of the size of the physical RAM (i.e., 48K bytes for the B768 device). The B768 RAM is addressed through memory selects 2 and 3.

The RAM can be protected by the memory protection unit (MPU) portion of the SYS module, allowing the user finer blocks of memory protection than is allowed by the memory selects. The MPU is ideal for protecting an operating system while allowing access to the current task. For more detailed information on the MPU portion of the SYS module and memory protection, see the memory section of the *TMS470R1x System Module Reference Guide* (literature number SPNU189).

## F05 Flash

The F05 flash memory is a nonvolatile electrically erasable and programmable memory implemented with a 32-bit-wide data bus interface. The F05 flash has an external state machine for program and erase functions. See the *flash read* and *flash program and erase* sections below.

## Flash Protection Keys

The B768 device provides flash protection keys. These four 32-bit protection keys prevent program/erase/compaction operations from occurring until after the four protection keys have been matched by the CPU loading the correct user keys into the FMPKEY control register. The protection keys on the B768 are located in the last 4 words of the first 16K sector. For more detailed information on flash program and erase operations, see the *TMS470R1x F05 Flash Reference Guide* (literature number [SPNU213](#)).

## Flash Read

The B768 flash memory is configurable by the SYS module to be addressed within the range of 0x0000\_0000 to 0xFFE0\_0000. The flash is addressed through memory selects 0 and 1.

### NOTE:

The flash external pump voltage ( $V_{CCP}$ ) is required for all operations (program, erase, and read).

## Flash Pipeline Mode

When in pipeline mode, the flash operates with a system clock frequency of up to 60 MHz (versus a system clock in normal mode of up to 30 MHz). Flash in pipeline mode is capable of accessing 64-bit words and provides two 32-bit pipelined words to the CPU. Also in pipeline mode, the flash can be read with no wait states when memory addresses are contiguous (after the initial 1-or 2-wait-state reads).

### NOTE:

After a system reset, pipeline mode is disabled (ENPIPE bit [FMREGOPT.0] is a 0). In other words, the B768 device powers up and comes out of reset in non-pipeline mode. Furthermore, setting the flash configuration mode bit (GBLCTRL.4) will override pipeline mode.

## Flash Program and Erase

The B768 device flash contains three 256K-byte memory arrays (or banks) for a total of 768K bytes of flash and consists of 18 sectors. These 18 sectors are sized as follows:

**Table 4. B768 Flash Memory Banks and Sectors**

| SECTOR NO. | SEGMENT   | LOW ADDRESS | HIGH ADDRESS | MEMORY ARRAYS<br>(OR BANKS) |
|------------|-----------|-------------|--------------|-----------------------------|
| 0          | 16K Bytes | 0x0000_0000 | 0x0000_3FFF  | BANK0<br>(256K Bytes)       |
| 1          | 16K Bytes | 0x0000_4000 | 0x0000_7FFF  |                             |
| 2          | 32K Bytes | 0x0000_8000 | 0x0000_FFFF  |                             |
| 3          | 32K Bytes | 0x0001_0000 | 0x0001_7FFF  |                             |
| 4          | 32K Bytes | 0x0001_8000 | 0x0001_FFFF  |                             |
| 5          | 32K Bytes | 0x0002_0000 | 0x0002_7FFF  |                             |
| 6          | 32K Bytes | 0x0002_8000 | 0x0002_FFFF  |                             |
| 7          | 32K Bytes | 0x0003_0000 | 0x0003_7FFF  |                             |
| 8          | 16K Bytes | 0x0003_8000 | 0x0003_BFFF  |                             |
| 9          | 16K Bytes | 0x0003_C000 | 0x0003_FFFF  |                             |
| 0          | 64K Bytes | 0x0004_0000 | 0x0004_FFFF  | BANK1<br>(256K Bytes)       |
| 1          | 64K Bytes | 0x0005_0000 | 0x0005_FFFF  |                             |
| 2          | 64K Bytes | 0x0006_0000 | 0x0006_FFFF  |                             |
| 3          | 64K Bytes | 0x0007_0000 | 0x0007_FFFF  |                             |
| 0          | 64K Bytes | 0x0008_0000 | 0x0008_FFFF  | BANK2<br>(256K Bytes)       |
| 1          | 64K Bytes | 0x0009_0000 | 0x0009_FFFF  |                             |
| 2          | 64K Bytes | 0x000A_0000 | 0x000A_FFFF  |                             |
| 3          | 64K Bytes | 0x000B_0000 | 0x000B_FFFF  |                             |

The minimum size for an erase operation is one sector. The maximum size for a program operation is one 16-bit word. For more detailed information on flash program and erase operations, see the *TMS470R1x Flash Reference Guide* (literature number [SPNU194](#)).

### NOTE:

The flash external pump voltage ( $V_{CCP}$ ) is required for all operations (program, erase, and read).

## HET RAM

The B768 device contains HET RAM. The HET RAM has a 128-instruction capability. The HET RAM is configurable by the SYS module to be addressed within the range of 0x0000\_0000 to 0xFFE0\_0000. The HET RAM is addressed through memory select 4.

## Peripheral Selects and Base Addresses

The B768 device uses 8 of the 16 peripheral selects to decode the base addresses of the peripherals. These peripheral selects are fixed and transparent to the user since they are part of the decoding scheme used by the SYS module.

Control registers for the peripherals, SYS module, and flash begin at the base addresses shown in [Table 5](#).

**Table 5. B768 Peripherals, System Module, and Flash Base Addresses**

| CONNECTING MODULE       | ADDRESS RANGE |                | PERIPHERAL SELECTS |
|-------------------------|---------------|----------------|--------------------|
|                         | BASE ADDRESS  | ENDING ADDRESS |                    |
| SYSTEM                  | 0 x FFFF_FFD0 | 0 x FFFF_FFFF  | N/A                |
| RESERVED                | 0 x FFFF_FF60 | 0 x FFFF_FFCB  | N/A                |
| PSA                     | 0 x FFFF_FF40 | 0 x FFFF_FF5F  | N/A                |
| CIM                     | 0 x FFFF_FF20 | 0 x FFFF_FF3F  | N/A                |
| RTI                     | 0 x FFFF_FF00 | 0 x FFFF_FF1F  | N/A                |
| DMA                     | 0 x FFFF_FE80 | 0 x FFFF_FEFF  | N/A                |
| DEC                     | 0 x FFFF_FE00 | 0 x FFFF_FE7F  | N/A                |
| MMC                     | 0 x FFFF_FD00 | 0 x FFFF_FD7F  | N/A                |
| IEM                     | 0 x FFFF_FC00 | 0 x FFFF_FCFE  | N/A                |
| RESERVED                | 0 x FFF8_0000 | 0 x FFFF_FBFF  | N/A                |
| RESERVED                | 0 x FFF7_FD00 | 0 x FFF7_FFFF  | PS[0]              |
| HET                     | 0 x FFF7_FC00 | 0 x FFF7_FCFE  |                    |
| RESERVED                | 0 x FFF7_F900 | 0 x FFF7_FBFF  | PS[1]              |
| SPI1                    | 0 x FFF7_F800 | 0 x FFF7_F8FF  |                    |
| RESERVED                | 0 x FFF7_F600 | 0 x FFF7_F7FF  | PS[2]              |
| SCI2                    | 0 x FFF7_F500 | 0 x FFF7_F5FF  |                    |
| SCI1                    | 0 x FFF7_F400 | 0 x FFF7_F4FF  |                    |
| RESERVED                | 0 x FFF7_F100 | 0 x FFF7_F3FF  | PS[3]              |
| MibADC                  | 0 x FFF7_F000 | 0 x FFF7_F0FF  |                    |
| ECP                     | 0 x FFF7_EF00 | 0 x FFF7_EFFF  | PS[4]              |
| RESERVED                | 0 x FFF7_ED00 | 0 x FFF7_EEFF  |                    |
| GIO                     | 0 x FFF7_EC00 | 0 x FFF7_ECFE  |                    |
| HECC2                   | 0 x FFF7_EA00 | 0 x FFF7_EBFF  | PS[5]              |
| HECC1                   | 0 x FFF7_E800 | 0 x FFF7_E9FF  |                    |
| HECC2 RAM               | 0 x FFF7_E600 | 0 x FFF7_E7FF  | PS[6]              |
| HECC1 RAM               | 0 x FFF7_E400 | 0 x FFF7_E5FF  |                    |
| RESERVED                | 0 x FFF7_E000 | 0 x FFF7_E3FF  | PS[7]              |
| RESERVED                | 0 x FFF7_DC00 | 0 x FFF7_DFFF  | PS[8]              |
| RESERVED                | 0 x FFF7_D800 | 0 x FFF7_DBFF  | PS[9]              |
| SPI5                    | 0 x FFF7_D700 | 0 x FFF7_D7FF  | PS[10]             |
| SPI4                    | 0 x FFF7_D600 | 0 x FFF7_D6FF  |                    |
| SPI3                    | 0 x FFF7_D500 | 0 x FFF7_D5FF  |                    |
| SPI2                    | 0 x FFF7_D400 | 0 x FFF7_D4FF  |                    |
| HECC3 RAM               | 0 x FFF7_D200 | 0 x FFF7_D3FF  | PS[11]             |
| HECC3                   | 0 x FFF7_D000 | 0 x FFF7_D1FF  |                    |
| RESERVED                | 0 x FFF7_C000 | 0 x FFF7_CFFF  | PS[12]–PS[15]      |
| RESERVED                | 0 x FFF7_0000 | 0 x FFF7_BFFF  | N/A                |
| FLASH CONTROL REGISTERS | 0 x FFE8_8000 | 0 x FFE8_BFFF  | N/A                |
| MPU CONTROL REGISTERS   | 0 x FFE8_4000 | 0 x FFE8_4023  | N/A                |

## Direct-Memory Access (DMA)

The direct-memory access (DMA) controller transfers data to and from any specified location in the B768 memory map (except for restricted memory locations like the system control registers area). The DMA manages up to 16 channels, and supports data transfer for both on-chip and off-chip memories and peripherals. The DMA controller is connected to both the CPU and Peripheral busses, enabling these data transfers to occur in parallel with CPU activity and thus maximizing overall system performance.

Although the DMA controller has two possible configurations, for the B768 device, the DMA controller configuration is 32 control packets and 16 channels.

For the B768 DMA request hardwired configuration, see [Table 6](#).

**Table 6. DMA Request Lines Connections**

| MODULES                     | DMA REQUEST INTERRUPT SOURCES       |                      | DMA CHANNEL |
|-----------------------------|-------------------------------------|----------------------|-------------|
| RESERVED                    |                                     |                      | DMAREQ[0]   |
| SPI1                        | SPI1 end-receive                    | SPI1DMA0             | DMAREQ[1]   |
| SPI1                        | SPI1 end-transmit                   | SPI1DMA1             | DMAREQ[2]   |
| MibADC <sup>(1)</sup>       | MibADC event                        | MibADC DMA0          | DMAREQ[3]   |
| MibADC <sup>(1)</sup> /SCI1 | MibADC G1/SCI1 end-receive          | MibADC DMA1/SCI1DMA0 | DMAREQ[4]   |
| MibADC <sup>(1)</sup> /SCI1 | MibADC G2/SCI1 end-transmit         | MibADC DMA2/SCI1DMA1 | DMAREQ[5]   |
| SPI4                        | SPI4 end-receive                    | SPI4DMA0             | DMAREQ[6]   |
| SPI2                        | SPI2 end-receive                    | SPI2DMA0             | DMAREQ[7]   |
| SPI2                        | SPI2 end-transmit                   | SPI2DMA1             | DMAREQ[8]   |
| RESERVED                    |                                     |                      | DMAREQ[9]   |
| RESERVED                    |                                     |                      | DMAREQ[10]  |
| SPI4                        | SPI4 end-transmit                   | SPI4DMA1             | DMAREQ[11]  |
| SPI5                        | SPI5 end-receive                    | SPI5DMA0             | DMAREQ[12]  |
| SPI5                        | SPI5 end-transmit                   | SPI5DMA1             | DMAREQ[13]  |
| SCI2/SPI3                   | SCI2 end-receive/SPI3 end-receive   | SCI2DMA0/SPI3DMA0    | DMAREQ[14]  |
| SCI2/SPI3                   | SCI2 end-transmit/SPI3 end-transmit | SCI2DMA1/SPI3DMA1    | DMAREQ[15]  |

(1) The MibADC can be serviced by the DMA when the device is in buffered mode. For more information on buffered mode, see the *MibADC* section of this data sheet and the *TMS470R1x Multi-Buffered Analog-to-Digital Converter (MibADC) Reference Guide* (literature number SPNU206).

Each channel has two control packets attached to it, allowing the DMA to continuously load RAM and generate periodic interrupts so that the data can be read by the CPU. The control packets allow for the interrupt enable, and the channels determine the priority level of the interrupt.

DMA transfers occur in one of two modes:

- Non-request mode (used when transferring from memory to memory)
- Request mode (used when transferring from memory to peripheral)

For more detailed functional information on the DMA controller, see the *TMS470R1x Direct Memory Access (DMA) Controller Reference Guide* (literature number SPNU210).

## Interrupt Priority (IEM to CIM)

Interrupt requests originating from the B768 peripheral modules (i.e., SPI1, SPI2, or SPI3; SCI1 or SCI2; HECC1 or HECC2; RTI; etc.) are assigned to channels within the 48-channel interrupt expansion module (IEM) where, via programmable register mapping, these channels are then mapped to the 32-channel central interrupt manager (CIM) portion of the SYS module.

Programming multiple interrupt sources in the IEM to the same CIM channel effectively shares the CIM channel between sources.

The CIM request channels are maskable so that individual channels can be selectively disabled. All interrupt requests can be programmed in the CIM to be of either type:

- Fast interrupt request (FIQ)
- Normal interrupt request (IRQ)

The CIM prioritizes interrupts. The precedence of request channels decrease with ascending channel order in the CIM (0 [highest] and 31 [lowest] priority). For IEM-to-CIM default mapping, channel priorities, and their associated modules, see [Table 7](#).

**Table 7. Interrupt Priority (IEM and CIM)**

| MODULES   | INTERRUPT SOURCES             | DEFAULT CIM INTERRUPT LEVEL/CHANNEL | IEM CHANNEL |
|-----------|-------------------------------|-------------------------------------|-------------|
| SPI1      | SPI1 end-transfer/overrun     | 0                                   | 0           |
| RTI       | COMP2 interrupt               | 1                                   | 1           |
| RTI       | COMP1 interrupt               | 2                                   | 2           |
| RTI       | TAP interrupt                 | 3                                   | 3           |
| SPI2      | SPI2 end-transfer/overrun     | 4                                   | 4           |
| GIO       | GIO interrupt A               | 5                                   | 5           |
| RESERVED  |                               | 6                                   | 6           |
| HET       | HET interrupt 1               | 7                                   | 7           |
| SPI4      | SPI4 end-transfer/overrun     | 8                                   | 8           |
| SCI1/SCI2 | SCI1 or SCI2 error interrupt  | 9                                   | 9           |
| SCI1      | SCI1 receive interrupt        | 10                                  | 10          |
| RESERVED  |                               | 11                                  | 11          |
| SPI5      | SPI5 end-transfer/overrun     | 12                                  | 12          |
| HECC1     | HECC1 interrupt A             | 13                                  | 13          |
| RESERVED  |                               | 14                                  | 14          |
| SPI3      | SPI3 end-transfer/overrun     | 15                                  | 15          |
| MibADC    | MibADC end event conversion   | 16                                  | 16          |
| SCI2      | SCI2 receive interrupt        | 17                                  | 17          |
| DMA       | DMA interrupt 0               | 18                                  | 18          |
| HECC3     | HECC3 interrupt A             | 19                                  | 19          |
| SCI1      | SCI1 transmit interrupt       | 20                                  | 20          |
| System    | SW interrupt (SSI)            | 21                                  | 21          |
| RESERVED  |                               | 22                                  | 22          |
| HET       | HET interrupt 2               | 23                                  | 23          |
| HECC1     | HECC1 interrupt B             | 24                                  | 24          |
| RESERVED  |                               | 25                                  | 25          |
| SCI2      | SCI2 transmit interrupt       | 26                                  | 26          |
| MibADC    | MibADC end Group 1 conversion | 27                                  | 27          |
| DMA       | DMA interrupt 1               | 28                                  | 28          |
| GIO       | GIO interrupt B               | 29                                  | 29          |
| MibADC    | MibADC end Group 2 conversion | 30                                  | 30          |
| HECC3     | HECC3 interrupt B             | 31                                  | 31          |

**Table 7. Interrupt Priority (IEM and CIM) (continued)**

| MODULES  | INTERRUPT SOURCES | DEFAULT CIM INTERRUPT LEVEL/CHANNEL | IEM CHANNEL |
|----------|-------------------|-------------------------------------|-------------|
| RESERVED |                   | 31                                  | 32          |
| RESERVED |                   | 31                                  | 33          |
| RESERVED |                   | 31                                  | 34          |
| RESERVED |                   | 31                                  | 35          |
| RESERVED |                   | 31                                  | 36          |
| RESERVED |                   | 31                                  | 37          |
| HECC2    | HECC2 interrupt A | 31                                  | 38          |
| HECC2    | HECC2 interrupt B | 31                                  | 39          |
| RESERVED |                   | 31                                  | 40          |
| RESERVED |                   | 31                                  | 41          |
| RESERVED |                   | 31                                  | 42          |
| RESERVED |                   | 31                                  | 43          |
| RESERVED |                   | 31                                  | 44          |
| RESERVED |                   | 31                                  | 45          |
| RESERVED |                   | 31                                  | 46          |
| RESERVED |                   | 31                                  | 47          |

For more detailed functional information on the IEM, see the *TMS470R1x Interrupt Expansion Module (IEM) Reference Guide* (literature number SPNU211). For more detailed functional information on the CIM, see the *TMS470R1x System Module Reference Guide* (literature number SPNU189).

## MibADC

The multi-buffered analog-to-digital converter (MibADC) accepts an analog signal and converts the signal to a 10-bit digital value.

The B768 MibADC module can function in two modes: compatibility mode, where its programmer's model is compatible with the TMS470R1x ADC module and its digital results are stored in digital result registers; or in buffered mode, where the digital result registers are replaced with three FIFO buffers, one for each conversion group [event, group1 (G1), and group2 (G2)]. In buffered mode, the MibADC buffers can be serviced by interrupts or by the DMA.

### ***MibADC Event Trigger Enhancements***

The MibADC includes two major enhancements over the event-triggering capability of the TMS470R1x ADC.

- Both group1 and the event group can be configured for event-triggered operation, providing up to two event-triggered groups.
- The trigger source and polarity can be selected individually for both group 1 and the event group from the three options identified in [Table 8](#).

**Table 8. MibADC Event Hookup Configuration**

| EVENT # | SOURCE SELECT BITS FOR G1 OR<br>EVENT(G1SRC[1:0] OR EVSRC[1:0]) | SIGNAL PIN NAME |
|---------|-----------------------------------------------------------------|-----------------|
| EVENT1  | 00                                                              | ADEVT           |
| EVENT2  | 01                                                              | HET18           |
| EVENT3  | 10                                                              | HET19           |
| EVENT4  | 11                                                              | N/C             |

For group 1, these event-triggered selections are configured via the group 1 source select bits (G1SRC[1:0]) in the AD event source register (ADEVTSRC[5:4]). For the event group, these event-triggered selections are configured via the event group source select bits (EVSRC[1:0]) in the AD event source register (ADEVTSRC[1:0]).

For more detailed functional information on the MibADC, see the *TMS470R1x Multi-Buffered Analog-to-Digital Converter (MibADC) Reference Guide* (literature number SPNU206).

## Documentation Support

Extensive documentation supports all of the TMS470 microcontroller family generation of devices. The types of documentation available include data sheets with design specifications; complete user guides for all devices and development support tools; and hardware and software applications. Useful reference documentation includes:

- Bulletin
  - *TMS470 Microcontroller Family Product Bulletin* (literature number [SPNB086](#))
- User's Guides
  - *TMS470R1x System Module Reference Guide* (literature number [SPNU189](#))
  - *TMS470R1x General Purpose Input/Output (GPIO) Reference Guide* (literature number [SPNU192](#))
  - *TMS470R1x Direct Memory Access (DMA) Controller Reference Guide* (literature number [SPNU194](#))
  - *TMS470R1x Serial Peripheral Interface (SPI) Reference Guide* (literature number [SPNU195](#))
  - *TMS470R1x Serial Communication Interface (SCI) Reference Guide* (literature number [SPNU196](#))
  - *TMS470R1x Controller Area Network (CAN) Reference Guide* (literature number [SPNU197](#))
  - *TMS470R1x High End Timer (HET) Reference Guide* (literature number [SPNU199](#))
  - *TMS470R1x External Clock Prescale (ECP) Reference Guide* (literature number [SPNU202](#))
  - *TMS470R1x MultiBuffered Analog to Digital (MibADC) Reference Guide* (literature number [SPNU206](#))
  - *TMS470R1x Zero-Pin Phase Locked Loop (ZPLL) Clock Module Reference Guide* (literature number [SPNU212](#))
  - *TMS470R1x F05 Flash Reference Guide* (literature number [SPNU213](#))
  - *TMS470R1x Class II Serial Interface B (C2SIb) Reference Guide* (literature number [SPNU214](#))
  - *TMS470R1x Class II Serial Interface A (C2SIa) Reference Guide* (literature number [SPNU218](#))
  - *TMS470R1x JTAG Security Module (JSM) Reference Guide* (literature number [SPNU245](#))
  - *TMS470R1x Memory Security Module (MSM) Reference Guide* (literature number [SPNU246](#))
  - *TMS470 Peripherals Overview Reference Guide* (literature number [SPNU248](#))
- Errata Sheet
  - *TMS470R1B768 TMS470 Microcontrollers Silicon Errata* (literature number [SPNZ140](#))

## Device and Development-Support Tool Nomenclature

To designate the stages in the product development cycle, TI assigns prefixes to the part numbers of all DSP devices and support tools. Each DSP commercial family member has one of three prefixes: TMX, TMP, or TMS (e.g., **TMS470R1B768**). Texas Instruments recommends two of three possible prefix designators for its support tools: TMDX and TMDS. These prefixes represent evolutionary stages of product development from engineering prototypes (TMX/TMDX) through fully qualified production devices/tools (TMS/TMDS).

Device development evolutionary flow:

**TMX** Experimental device that is not necessarily representative of the final device's electrical specifications

**TMP** Final silicon die that conforms to the device's electrical specifications but has not completed quality and reliability verification

**TMS** Fully qualified production device

Support tool development evolutionary flow:

**TMDX** Development-support product that has not yet completed Texas Instruments internal qualification testing.

**TMDS** Fully qualified development-support product

TMX and TMP devices and TMDX development-support tools are shipped against the following disclaimer:

"Developmental product is intended for internal evaluation purposes."

TMS devices and TMDS development-support tools have been characterized fully, and the quality and reliability of the device have been demonstrated fully. TI's standard warranty applies.

Predictions show that prototype devices (TMX or TMP) have a greater failure rate than the standard production devices. Texas Instruments recommends that these devices not be used in any production system because their expected end-use failure rate still is undefined. Only qualified production devices are to be used.

[Figure 2](#) illustrates the numbering and symbol nomenclature for the TMS470R1x family.

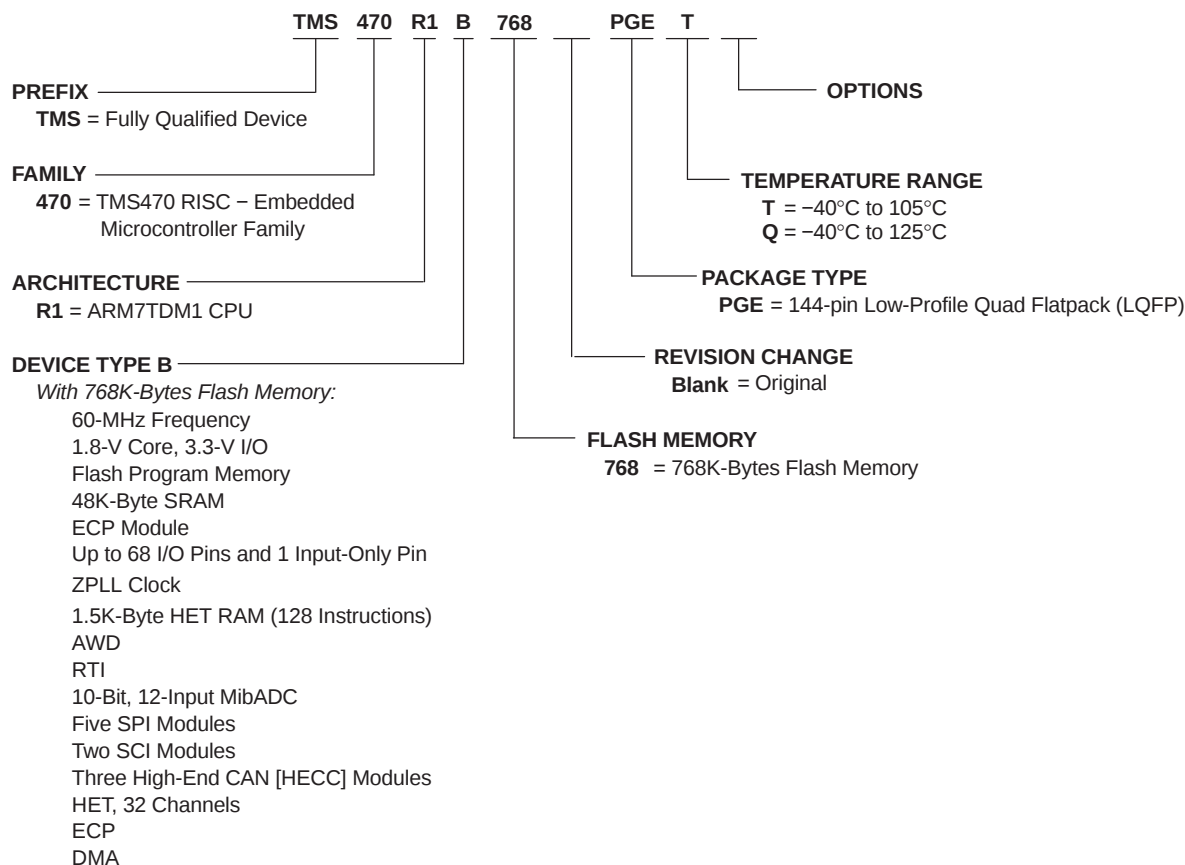


Figure 2. TMS470R1x Family Nomenclature

## Device Identification Code Register

The device identification code register identifies the silicon version, the technology family (TF), a ROM or flash device, and an assigned device-specific part number (see [Figure 3](#)). The B768 device identification code register value is 0xn87F.

**Figure 3. TMS470 Device ID Bit Allocation Register [offset = 0xFFFF\_FFF0h]**

|          |  |  |  |  |  |  |  |     |  |     |  |             |  |    |  |    |  |  |  |   |  |  |  |     |  |     |  |     |  |   |  |   |  |
|----------|--|--|--|--|--|--|--|-----|--|-----|--|-------------|--|----|--|----|--|--|--|---|--|--|--|-----|--|-----|--|-----|--|---|--|---|--|
| 31       |  |  |  |  |  |  |  |     |  |     |  |             |  |    |  | 16 |  |  |  |   |  |  |  |     |  |     |  |     |  |   |  |   |  |
| Reserved |  |  |  |  |  |  |  |     |  |     |  |             |  |    |  |    |  |  |  |   |  |  |  |     |  |     |  |     |  |   |  |   |  |
| 15       |  |  |  |  |  |  |  | 12  |  |     |  | 11          |  | 10 |  | 9  |  |  |  | 3 |  |  |  |     |  |     |  | 2   |  | 1 |  | 0 |  |
| VERSION  |  |  |  |  |  |  |  | TF  |  | R/F |  | PART NUMBER |  |    |  |    |  |  |  |   |  |  |  | 1   |  | 1   |  | 1   |  |   |  |   |  |
| R-K      |  |  |  |  |  |  |  | R-K |  | R-K |  | R-K         |  |    |  |    |  |  |  |   |  |  |  | R-1 |  | R-1 |  | R-1 |  |   |  |   |  |

### LEGEND:

For bits 3-15: R = Read only, -K = Value constant after RST

For bits 0-2: R = Read only, -1 = Value after RST

**Table 9. TMS470 Device ID Bit Allocation Register Field Descriptions**

| Bit   | Field       | Value  | Description                                                                                                                                                                             |
|-------|-------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31–16 | Reserved    |        | Reads are undefined and writes have no effect.                                                                                                                                          |
| 15–12 | VERSION     |        | Silicon version (revision) bits. These bits identify the silicon version of the device. Initial device version numbers start at 0000. The current revision for the B768 device is 0000. |
| 11    | TF          | 0<br>1 | Technology family bit. This bit distinguishes the technology family core power supply:<br>3.3 V for F10/C10 devices<br>1.8 V for F05/C05 devices                                        |
| 10    | R/F         | 0<br>1 | ROM/flash bit. This bit distinguishes between ROM and flash devices:<br>Flash device<br>ROM device                                                                                      |
| 9–3   | PART NUMBER |        | Device-specific part number bits. These bits identify the assigned device-specific part number. The assigned device-specific part number for the B768 device is 0001111.                |
| 2–0   | 1           |        | Mandatory high<br>Bits 2, 1, and 0 are tied high by default.                                                                                                                            |

## DEVICE ELECTRICAL SPECIFICATIONS AND TIMING PARAMETERS

### Absolute Maximum Ratings

over operating free-air temperature range, T version unless otherwise noted<sup>(1)</sup>

|                                               |                                                                                     |                 |
|-----------------------------------------------|-------------------------------------------------------------------------------------|-----------------|
| Supply voltage range:                         | $V_{CC}$ <sup>(2)</sup>                                                             | –0.3 V to 2.5 V |
| Supply voltage range:                         | $V_{CCIO}$ , $V_{CCAD}$ , $V_{CCP}$ (flash pump) <sup>(2)</sup>                     | –0.3 V to 4.1 V |
| Input voltage range:                          | All input pins                                                                      | –0.3 V to 4.1 V |
| Input clamp current:                          | $I_{IK}$ ( $V_I < 0$ or $V_I > V_{CCIO}$ )                                          |                 |
|                                               | All pins except ADIN[0:15], $\overline{PORRST}$ , $\overline{TRST}$ , TEST, and TCK | ±20 mA          |
|                                               | $I_{IK}$ ( $V_I < 0$ or $V_I > V_{CCAD}$ )                                          |                 |
|                                               | ADIN[0:15]                                                                          | ±10 mA          |
| Operating free-air temperature range, $T_A$ : | T version                                                                           | –40°C to 105°C  |
|                                               | Q version                                                                           | –40°C to 125°C  |
| Operating junction temperature range, $T_J$ : |                                                                                     | –40°C to 150°C  |
| Storage temperature range, $T_{stg}$ :        |                                                                                     | –65°C to 150°C  |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to their associated grounds.

### Device Recommended Operating Conditions<sup>(1)</sup>

|            |                                     |           | MIN  | NOM | MAX  | UNIT |
|------------|-------------------------------------|-----------|------|-----|------|------|
| $V_{CC}$   | Digital logic supply voltage (core) |           | 1.81 |     | 2.05 | V    |
| $V_{CCIO}$ | Digital logic supply voltage (I/O)  |           | 3    | 3.3 | 3.6  | V    |
| $V_{CCAD}$ | MibADC supply voltage               |           | 3    | 3.3 | 3.6  | V    |
| $V_{CCP}$  | Flash pump supply voltage           |           | 3    | 3.3 | 3.6  | V    |
| $V_{SS}$   | Digital logic supply ground         |           |      | 0   |      | V    |
| $V_{SSAD}$ | MibADC supply ground                |           | –0.1 |     | 0.1  | V    |
| $T_A$      | Operating free-air temperature      | T version | –40  |     | 105  | °C   |
|            |                                     | Q version | –40  |     | 125  | °C   |
| $T_J$      | Operating junction temperature      |           | –40  |     | 150  | °C   |

- (1) All voltages are with respect to  $V_{SS}$ , except  $V_{CCAD}$ , which is with respect to  $V_{SSAD}$ .

## ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range, T version (unless otherwise noted)<sup>(1)</sup>

| PARAMETER         |                                                                      |                                                                      | TEST CONDITIONS                                                                         | MIN                     | TYP | MAX                     | UNIT |
|-------------------|----------------------------------------------------------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-------------------------|-----|-------------------------|------|
| V <sub>hys</sub>  | Input hysteresis                                                     |                                                                      |                                                                                         | 0.15                    |     |                         | V    |
| V <sub>IL</sub>   | Low-level input voltage                                              | All inputs <sup>(2)</sup> except OSCIN                               |                                                                                         | –0.3                    |     | 0.8                     | V    |
|                   |                                                                      | OSCIN only                                                           |                                                                                         | –0.3                    |     | 0.35 V <sub>CC</sub>    |      |
| V <sub>IH</sub>   | High-level input voltage                                             | All inputs except OSCIN                                              |                                                                                         | 2                       |     | V <sub>CCIO</sub> + 0.3 | V    |
|                   |                                                                      | OSCIN only                                                           |                                                                                         | 0.65 V <sub>CC</sub>    |     | V <sub>CC</sub> + 0.3   |      |
| V <sub>th</sub>   | Input threshold voltage                                              | AWD only                                                             |                                                                                         | 1.35                    |     | 1.8                     | V    |
| RDS <sub>ON</sub> | Drain-to-source on resistance                                        | AWD only <sup>(3)</sup>                                              | V <sub>OL</sub> = 0.35 V at I <sub>OL</sub> = 2 mA                                      |                         |     | 175                     | Ω    |
| V <sub>OL</sub>   | Low-level output voltage <sup>(4)</sup>                              |                                                                      | I <sub>OL</sub> = I <sub>OL</sub> MAX                                                   |                         |     | 0.2 V <sub>CCIO</sub>   | V    |
|                   |                                                                      |                                                                      | I <sub>OL</sub> = 50 μA                                                                 |                         |     | 0.2                     |      |
| V <sub>OH</sub>   | High-level output voltage <sup>(4)</sup>                             |                                                                      | I <sub>OH</sub> = I <sub>OH</sub> MIN                                                   | 0.8 V <sub>CCIO</sub>   |     |                         | V    |
|                   |                                                                      |                                                                      | I <sub>OH</sub> = 50 μA                                                                 | V <sub>CCIO</sub> – 0.2 |     |                         |      |
| I <sub>IC</sub>   | Input clamp current (I/O pins) <sup>(5)</sup>                        |                                                                      | V <sub>I</sub> < V <sub>SSIO</sub> – 0.3 or<br>V <sub>I</sub> > V <sub>CCIO</sub> + 0.3 | –2                      |     | 2                       | mA   |
| I <sub>I</sub>    | Input current (I/O pins)                                             | I <sub>IL</sub> Pulldown                                             | V <sub>I</sub> = V <sub>SS</sub>                                                        | –1                      |     | 1                       | μA   |
|                   |                                                                      | I <sub>IH</sub> Pulldown                                             | V <sub>I</sub> = V <sub>CCIO</sub>                                                      | 5                       |     | 40                      |      |
|                   |                                                                      | I <sub>IL</sub> Pullup                                               | V <sub>I</sub> = V <sub>SS</sub>                                                        | –40                     |     | –5                      |      |
|                   |                                                                      | I <sub>IH</sub> Pullup                                               | V <sub>I</sub> = V <sub>CCIO</sub>                                                      | –1                      |     | 1                       |      |
|                   |                                                                      | All other pins                                                       | No pullup or pulldown                                                                   | –1                      |     | 1                       |      |
| I <sub>OL</sub>   | Low-level output current                                             | CLKOUT, TDO                                                          | V <sub>OL</sub> = V <sub>OL</sub> MAX                                                   |                         |     | 8                       | mA   |
|                   |                                                                      | $\overline{\text{RST}}$ , SPInCLK, SPInSOMI, SPInSIMO <sup>(6)</sup> |                                                                                         |                         |     | 4                       |      |
|                   |                                                                      | All other output pins <sup>(7)</sup>                                 |                                                                                         |                         |     | 2                       |      |
| I <sub>OH</sub>   | High-level output current                                            | CLKOUT, TDO                                                          | V <sub>OH</sub> = V <sub>OH</sub> MIN                                                   | –8                      |     |                         | mA   |
|                   |                                                                      | $\overline{\text{RST}}$ , SPInCLK, SPInSOMI, SPInSIMO <sup>(6)</sup> |                                                                                         | –4                      |     |                         |      |
|                   |                                                                      | All other output pins except $\overline{\text{RST}}$ <sup>(7)</sup>  |                                                                                         | –2                      |     |                         |      |
| I <sub>CC</sub>   | V <sub>CC</sub> Digital supply current (operating mode)              |                                                                      | SYSCLK = 60 MHz,<br>ICLK = 20 MHz, V <sub>CC</sub> = 2.05 V                             |                         |     | 135                     | mA   |
|                   |                                                                      |                                                                      | SYSCLK = 24 MHz,<br>ICLK = 12 MHz, V <sub>CC</sub> = 2.05 V                             |                         |     | 105                     | mA   |
|                   | V <sub>CC</sub> Digital supply current (standby mode) <sup>(8)</sup> |                                                                      | OSCIN = 6 MHz, V <sub>CC</sub> = 2.05 V                                                 |                         |     | 4                       | mA   |
|                   | V <sub>CC</sub> Digital supply current (halt mode) <sup>(8)</sup>    |                                                                      | All frequencies, V <sub>CC</sub> = 2.05 V                                               |                         |     | 2                       | mA   |
| I <sub>CCIO</sub> | V <sub>CCIO</sub> Digital supply current (operating mode)            |                                                                      | No DC load, V <sub>CCIO</sub> = 3.6 V <sup>(8)</sup>                                    |                         |     | 10                      | mA   |
|                   | V <sub>CCIO</sub> Digital supply current (standby mode)              |                                                                      | No DC load, V <sub>CCIO</sub> = 3.6 V <sup>(8)</sup>                                    |                         |     | 300                     | μA   |
|                   | V <sub>CCIO</sub> Digital supply current (halt mode)                 |                                                                      | No DC load, V <sub>CCIO</sub> = 3.6 V <sup>(8)</sup>                                    |                         |     | 300                     | μA   |

(1) Source currents (out of the device) are negative while sink currents (into the device) are positive.

(2) This does not apply to the  $\overline{\text{PORRST}}$  pin. For  $\overline{\text{PORRST}}$  exceptions, see the  $\overline{\text{RST}}$  and  $\overline{\text{PORRST}}$  timings section.

(3) These values help to determine the external RC network circuit. For more details, see the *TMS470R1x System Module Reference Guide* (literature number SPNU189).

(4) V<sub>OL</sub> and V<sub>OH</sub> are linear with respect to the amount of load current (I<sub>OL</sub>/I<sub>OH</sub>) applied.

(5) Parameter does not apply to input-only or output-only pins.

(6) n = 1–5.

(7) The 2-mA buffers on this device are called zero-dominant buffers. If two of these buffers are shorted together and one is outputting a low level and the other is outputting a high level, the resulting value is always low.

(8) I/O pins configured as inputs or outputs with no load. All pulldown inputs ≤ 0.2 V. All pullup inputs ≥ V<sub>CCIO</sub> – 0.2 V.


## ELECTRICAL CHARACTERISTICS (continued)

over recommended operating free-air temperature range, T version (unless otherwise noted)

|            | PARAMETER                                  | TEST CONDITIONS                                                | MIN | TYP | MAX | UNIT          |
|------------|--------------------------------------------|----------------------------------------------------------------|-----|-----|-----|---------------|
| $I_{CCAD}$ | $V_{CCAD}$ supply current (operating mode) | All frequencies, $V_{CCAD} = 3.6\text{ V}$                     |     |     | 15  | mA            |
|            | $V_{CCAD}$ supply current (standby mode)   | All frequencies, $V_{CCAD} = 3.6\text{ V}$                     |     |     | 20  | $\mu\text{A}$ |
|            | $V_{CCAD}$ supply current (halt mode)      | All frequencies, $V_{CCAD} = 3.6\text{ V}$                     |     |     | 20  | $\mu\text{A}$ |
| $I_{CCP}$  | $V_{CCP}$ pump supply current              | $V_{CCP} = 3.6\text{ V}$ read operation                        |     |     | 55  | mA            |
|            |                                            | $V_{CCP} = 3.6\text{ V}$ program and erase                     |     |     | 70  | mA            |
|            |                                            | $V_{CCP} = 3.6\text{ V}$ standby mode operation <sup>(9)</sup> |     |     | 20  | $\mu\text{A}$ |
|            |                                            | $V_{CCP} = 3.6\text{ V}$ halt mode operation <sup>(9)</sup>    |     |     | 20  | $\mu\text{A}$ |
| $C_I$      | Input capacitance                          |                                                                |     | 2   |     | pF            |
| $C_O$      | Output capacitance                         |                                                                |     | 3   |     | pF            |

(9) For flash banks/pumps in sleep mode.

## Parameter Measurement Information

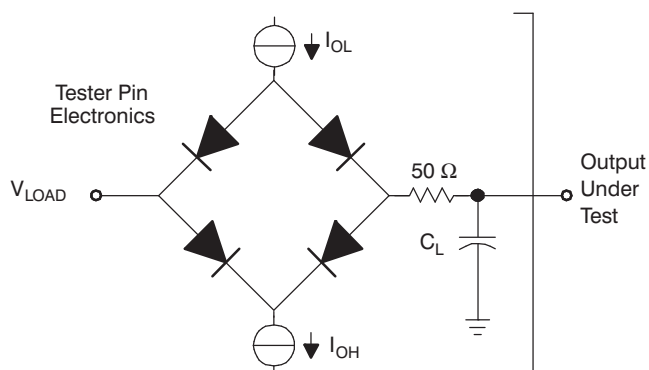

Where:  $I_{OL} = I_{OL\text{ MAX}}$  for the respective pin<sup>(A)</sup>  
 $I_{OH} = I_{OH\text{ MIN}}$  for the respective pin<sup>(A)</sup>  
 $V_{LOAD} = 1.5\text{ V}$   
 $C_L = 150\text{-pF}$  typical load-circuit capacitance<sup>(B)</sup>

- A. For these values, see the "Electrical Characteristics over Recommended Operating Free-Air Temperature Range" table.
- B. All timing parameters measured using an external load capacitance of 150 pF unless otherwise noted.

**Figure 4. Test Load Circuit**

## Timing Parameter Symbolology

Timing parameter symbols have been created in accordance with JEDEC Standard 100. To shorten the symbols, some of the pin names and other related terminology have been abbreviated as follows:

|           |                        |      |                                |
|-----------|------------------------|------|--------------------------------|
| CM        | Compaction, CMPCT      | RD   | Read                           |
| CO        | CLKOUT                 | RST  | Reset, $\overline{\text{RST}}$ |
| ER        | Erase                  | RX   | SCInRX                         |
| ICLK      | Interface clock        | S    | Slave mode                     |
| M         | Master mode            | SCC  | SCInCLK                        |
| OSC, OSCI | OSCIN                  | SIMO | SPInSIMO                       |
| OSCO      | OSCOOUT                | SOMI | SPInSOMI                       |
| P         | Program, PROG          | SPC  | SPInCLK                        |
| R         | Ready                  | SYS  | System clock                   |
| R0        | Read margin 0, RDMRGNO | TX   | SCInTX                         |
| R1        | Read margin 1, RDMRGN1 |      |                                |

Lowercase subscripts and their meanings are:

|   |                     |    |                        |
|---|---------------------|----|------------------------|
| a | access time         | r  | rise time              |
| c | cycle time (period) | su | setup time             |
| d | delay time          | t  | transition time        |
| f | fall time           | v  | valid time             |
| h | hold time           | w  | pulse duration (width) |


The following additional letters are used with these meanings:

|   |       |   |                                        |
|---|-------|---|----------------------------------------|
| H | High  | X | Unknown, changing, or don't care level |
| L | Low   | Z | High impedance                         |
| V | Valid |   |                                        |

## External Reference Resonator/Crystal Oscillator Clock Option

The oscillator is enabled by connecting the appropriate fundamental 4–20 MHz resonator/crystal and load capacitors across the external OSCIN and OSCOUT pins as shown in Figure 5a. The oscillator is a single-stage inverter held in bias by an integrated bias resistor. This resistor is disabled during leakage test measurement and HALT mode. **TI strongly encourages each customer to submit samples of the device to the resonator/crystal vendors for validation.** The vendors are equipped to determine what load capacitors will best tune their resonator/crystal to the microcontroller device for optimum start-up and operation over temperature/voltage extremes.

An external oscillator source can be used by connecting a 1.8-V clock signal to the OSCIN pin and leaving the OSCOUT pin unconnected (open) as shown in Figure 5b.

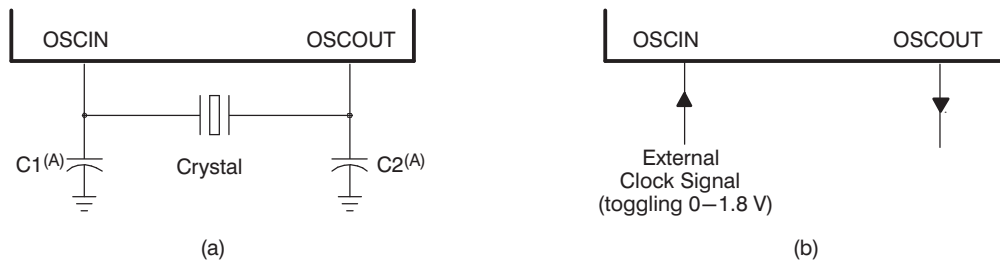

- A. The values of C1 and C2 should be provided by the resonator/crystal vendor.

**Figure 5. Crystal/Clock Connection**

## ZPLL AND CLOCK SPECIFICATIONS

### Timing Requirements for ZPLL Circuits Enabled or Disabled

|                |                                   | MIN | MAX | UNIT |
|----------------|-----------------------------------|-----|-----|------|
| $f_{(OSC)}$    | Input clock frequency             | 4   | 20  | MHz  |
| $t_{c(OSC)}$   | Cycle time, OSCIN                 | 50  |     | ns   |
| $t_{w(OSCIL)}$ | Pulse duration, OSCIN low         | 15  |     | ns   |
| $t_{w(OSCIH)}$ | Pulse duration, OSCIN high        | 15  |     | ns   |
| $f_{(OSCRST)}$ | OSC FAIL frequency <sup>(1)</sup> |     | 53  | kHz  |

- (1) Causes a device reset (specifically a clock reset) by setting the RST OSC FAIL (GLBCTRL.15) and the OSC FAIL flag (GLBSTAT.1) bits equal to 1. For more detailed information on these bits and device resets, see the *TMS470R1x System Module Reference Guide* (literature number SPNU189).

### Switching Characteristics over Recommended Operating Conditions for Clocks<sup>(1)(2)</sup>

| PARAMETER       |                                                | TEST CONDITIONS <sup>(3)</sup> | MIN  | MAX | UNIT |
|-----------------|------------------------------------------------|--------------------------------|------|-----|------|
| $f_{(SYS)}$     | System clock frequency <sup>(4)</sup>          | Pipeline mode enabled          |      | 60  | MHz  |
|                 |                                                | Pipeline mode disabled         |      | 24  | MHz  |
| $f_{(CONFIG)}$  | System clock frequency                         | Flash config mode              |      | 24  | MHz  |
| $f_{(ICLK)}$    | Interface clock frequency                      | Pipeline mode enabled          |      | 25  | MHz  |
|                 |                                                | Pipeline mode disabled         |      | 24  | MHz  |
| $f_{(ECLK)}$    | External clock output frequency for ECP module | Pipeline mode enabled          |      | 25  | MHz  |
|                 |                                                | Pipeline mode disabled         |      | 24  | MHz  |
| $t_{c(SYS)}$    | Cycle time, system clock                       | Pipeline mode enabled          | 16.7 |     | ns   |
|                 |                                                | Pipeline mode disabled         | 41.6 |     | ns   |
| $t_{c(CONFIG)}$ | Cycle time, system clock                       | Flash config mode              | 41.6 |     | ns   |
| $t_{c(ICLK)}$   | Cycle time, interface clock                    | Pipeline mode enabled          | 40   |     | ns   |
|                 |                                                | Pipeline mode disabled         | 41.6 |     | ns   |
| $t_{c(ECLK)}$   | Cycle time, ECP module external clock output   | Pipeline mode enabled          | 40   |     | ns   |
|                 |                                                | Pipeline mode disabled         | 41.6 |     | ns   |

- (1) When PLLDIS = 0,  $f_{(SYS)} = M \cdot f_{(OSC)} / R$ , where  $M = \{4 \text{ or } 8\}$ ,  $R = \{1, 2, 3, 4, 5, 6, 7, 8\}$ . R is the system-clock divider determined by the CLKDIVPRE [2:0] bits in the global control register (GLBCTRL[2:0]) and M is the PLL multiplier determined by the MULT4 bit (GLBCTRL.3).  
When PLLDIS = 1,  $f_{(SYS)} = f_{(OSC)} / R$ , where  $R = \{1, 2, 3, 4, 5, 6, 7, 8\}$ .  
 $f_{(ICLK)} = f_{(SYS)} / X$ , where  $X = \{1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16\}$ . X is the interface clock divider ratio determined by the PCR0[4:1] bits in the SYS module.
- (2)  $f_{(ECLK)} = f_{(ICLK)} / N$ , where  $N = \{1 \text{ to } 256\}$ . N is the ECP prescale value defined by the ECPCTRL[7:0] register bits in the ECP module.
- (3) Pipeline mode enabled or disabled is determined by the ENPIPE bit (FMREGOPT.0).
- (4) Flash Vread must be set to 5 V to achieve maximum system clock frequency.

## Switching Characteristics over Recommended Operating Conditions for External Clocks<sup>(1)(2)(3)</sup>

(see [Figure 6](#) and [Figure 7](#))

| PARAMETER    |                             | TEST CONDITIONS                         | MIN                                    | MAX | UNIT |
|--------------|-----------------------------|-----------------------------------------|----------------------------------------|-----|------|
| $t_{w(COL)}$ | Pulse duration, CLKOUT low  | SYSCLK or MCLK <sup>(4)</sup>           | $0.5t_{c(SYS)} - t_f$                  |     | ns   |
|              |                             | ICLK: X is even or 1 <sup>(5)</sup>     | $0.5t_{c(ICLK)} - t_f$                 |     |      |
|              |                             | ICLK: X is odd and not 1 <sup>(5)</sup> | $0.5t_{c(ICLK)} + 0.5t_{c(SYS)} - t_f$ |     |      |
| $t_{w(COH)}$ | Pulse duration, CLKOUT high | SYSCLK or MCLK <sup>(4)</sup>           | $0.5t_{c(SYS)} - t_f$                  |     | ns   |
|              |                             | ICLK: X is even or 1 <sup>(5)</sup>     | $0.5t_{c(ICLK)} - t_f$                 |     |      |
|              |                             | ICLK: X is odd and not 1 <sup>(5)</sup> | $0.5t_{c(ICLK)} - 0.5t_{c(SYS)} - t_f$ |     |      |
| $t_{w(EOL)}$ | Pulse duration, ECLK low    | N is even and X is even or odd          | $0.5t_{c(ECLK)} - t_f$                 |     | ns   |
|              |                             | N is odd and X is even                  | $0.5t_{c(ECLK)} - t_f$                 |     |      |
|              |                             | N is odd and X is odd and not 1         | $0.5t_{c(ECLK)} + 0.5t_{c(SYS)} - t_f$ |     |      |
| $t_{w(EOH)}$ | Pulse duration, ECLK high   | N is even and X is even or odd          | $0.5t_{c(ECLK)} - t_f$                 |     | ns   |
|              |                             | N is odd and X is even                  | $0.5t_{c(ECLK)} - t_f$                 |     |      |
|              |                             | N is odd and X is odd and not 1         | $0.5t_{c(ECLK)} - 0.5t_{c(SYS)} - t_f$ |     |      |

- (1)  $X = \{1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16\}$ . X is the interface clock divider ratio determined by the PCR0[4:1] bits in the SYS module.  
(2)  $N = \{1 \text{ to } 256\}$ . N is the ECP prescale value defined by the ECPCTRL[7:0] register bits in the ECP module.  
(3) CLKOUT/ECLK pulse durations (low/high) are a function of the OSCIN pulse durations when PLLDIS is active.  
(4) Clock source bits are selected as either SYSCLK (CLKCNTL[6:5] = 11 binary) or MCLK (CLKCNTL[6:5] = 10 binary).  
(5) Clock source bits are selected as ICLK (CLKCNTL[6:5] = 01 binary).

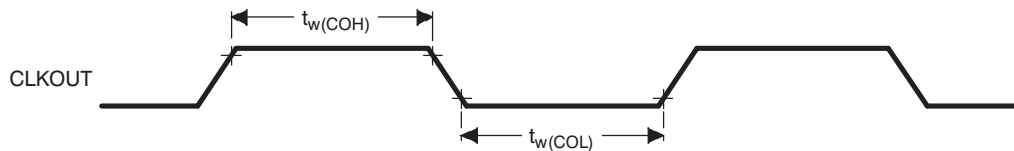


Figure 6. CLKOUT Timing Diagram

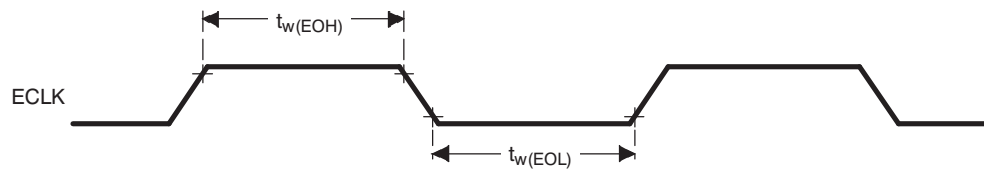



Figure 7. ECLK Timing Diagram

## RST AND PORRST TIMINGS

### Timing Requirements for PORRST

(see Figure 8)

|                     |                                                                                                                              | MIN | MAX            | UNIT    |
|---------------------|------------------------------------------------------------------------------------------------------------------------------|-----|----------------|---------|
| $V_{CCPORL}$        | $V_{CC}$ low supply level when $\overline{PORRST}$ must be active during power up                                            |     | 0.6            | V       |
| $V_{CCPORH}$        | $V_{CC}$ high supply level when $\overline{PORRST}$ must remain active during power up and become active during power down   | 1.5 |                | V       |
| $V_{CCIOPORL}$      | $V_{CCIO}$ low supply level when $\overline{PORRST}$ must be active during power up                                          |     | 1.1            | V       |
| $V_{CCIOPORH}$      | $V_{CCIO}$ high supply level when $\overline{PORRST}$ must remain active during power up and become active during power down |     | 2.75           | V       |
| $V_{IL}$            | Low-level input voltage after $V_{CCIO} > V_{CCIOPORH}$                                                                      |     | $0.2 V_{CCIO}$ | V       |
| $V_{IL(PORRST)}$    | Low-level input voltage of $\overline{PORRST}$ before $V_{CCIO} > V_{CCIOPORL}$                                              |     | 0.5            | V       |
| $t_{su(PORRST)r}$   | Setup time, $\overline{PORRST}$ active before $V_{CCIO} > V_{CCIOPORL}$ during power up                                      | 0   |                | ms      |
| $t_{su(VCCIO)r}$    | Setup time, $V_{CCIO} > V_{CCIOPORL}$ before $V_{CC} > V_{CCPORL}$                                                           | 0   |                | ms      |
| $t_h(PORRST)r$      | Hold time, $\overline{PORRST}$ active after $V_{CC} > V_{CCPORH}$                                                            | 1   |                | ms      |
| $t_{su(PORRST)f}$   | Setup time, $\overline{PORRST}$ active before $V_{CC} \leq V_{CCPORH}$ during power down                                     | 8   |                | $\mu$ s |
| $t_h(PORRST)rio$    | Hold time, $\overline{PORRST}$ active after $V_{CC} V_{CCIOPORH}$                                                            | 1   |                | ms      |
| $t_h(PORRST)d$      | Hold time, $\overline{PORRST}$ active after $V_{CC} < V_{CCPORL}$                                                            | 0   |                | ms      |
| $t_{su(PORRST)fio}$ | Setup time, $\overline{PORRST}$ active before $V_{CC} \leq V_{CCIOPORH}$ during power down                                   | 0   |                | ns      |
| $t_{su(VCCIO)f}$    | Setup time, $V_{CC} < V_{CCPORL}$ before $V_{CCIO} < V_{CCIOPORL}$                                                           | 0   |                | ns      |

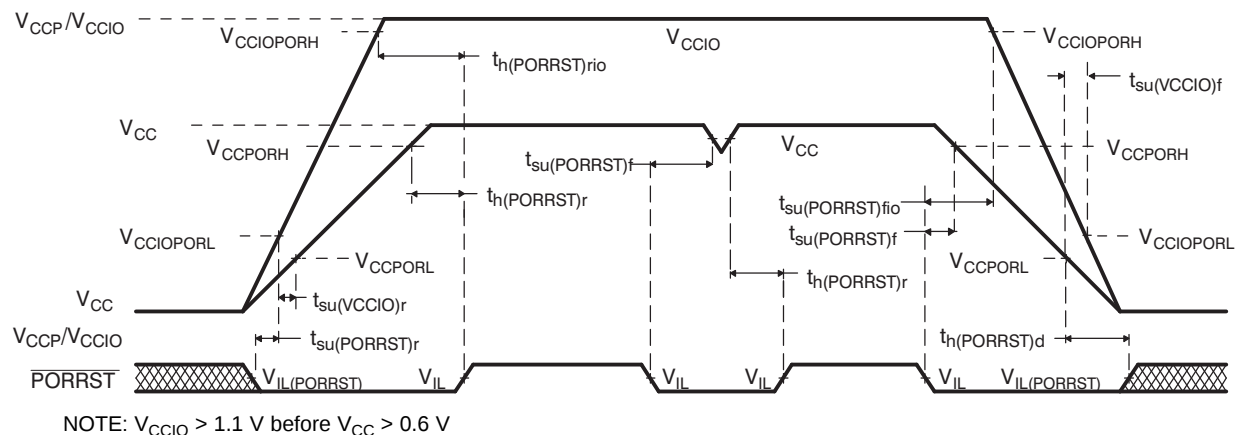

**Figure 8.  $\overline{PORRST}$  Timing Diagram**


### Switching Characteristics over Recommended Operating Conditions for $\overline{RST}^{(1)}$

|              | PARAMETER                                                              | MIN  | MAX          | UNIT |
|--------------|------------------------------------------------------------------------|------|--------------|------|
| $t_{v(RST)}$ | Valid time, $\overline{RST}$ active after $\overline{PORRST}$ inactive | 4112 | $t_{c(OSC)}$ | ns   |
|              | Valid time, $\overline{RST}$ active (all others)                       | 8    | $t_{c(SYS)}$ |      |

(1) Specified values do NOT include rise/fall times. For rise and fall timings, see the "Switching Characteristics for Output Timings versus Load Capacitance" table.

**JTAG Scan Interface Timing (JTAG clock specification 10-MHz and 50-pF load on TDO output)**

|                          |                                             | MIN | MAX | UNIT |
|--------------------------|---------------------------------------------|-----|-----|------|
| $t_{c(JTAG)}$            | Cycle time, JTAG low and high period        | 50  |     | ns   |
| $t_{su(TDI/TMS - TCKr)}$ | Setup time, TDI, TMS before TCK rise (TCKr) | 15  |     | ns   |
| $t_h(TCKr - TDI/TMS)$    | Hold time, TDI, TMS after TCKr              | 15  |     | ns   |
| $t_h(TCKf - TDO)$        | Hold time, TDO after TCKf                   | 10  |     | ns   |
| $t_d(TCKf - TDO)$        | Delay time, TDO valid after TCK fall (TCKf) |     | 45  | ns   |

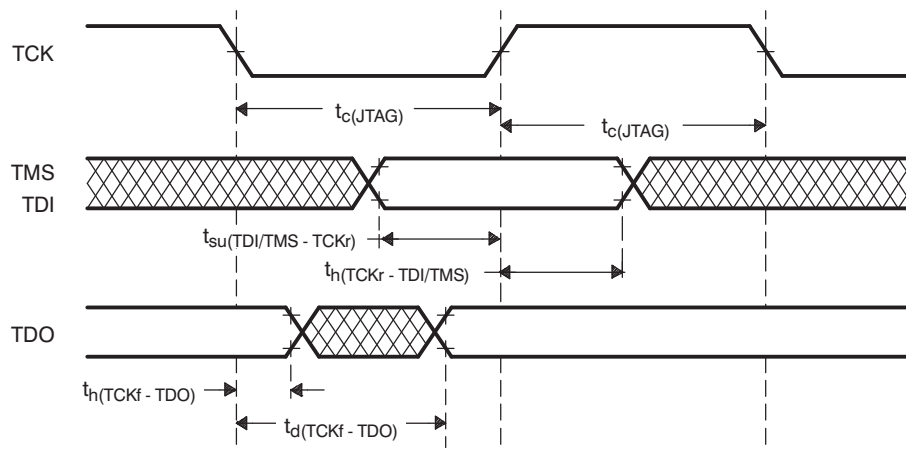

**Figure 9. JTAG Scan Timings**

## OUTPUT TIMINGS

### Switching Characteristics for Output Timings versus Load Capacitance $C_L$

 (see [Figure 10](#))

| PARAMETER |                                                                                 |                       | MIN | MAX  | UNIT |
|-----------|---------------------------------------------------------------------------------|-----------------------|-----|------|------|
| $t_r$     | Rise time, CLKOUT, AWD, TDO                                                     | $C_L = 15\text{ pF}$  | 0.5 | 2.50 | ns   |
|           |                                                                                 | $C_L = 50\text{ pF}$  | 1.5 | 5    |      |
|           |                                                                                 | $C_L = 100\text{ pF}$ | 3   | 9    |      |
|           |                                                                                 | $C_L = 150\text{ pF}$ | 4.5 | 12.5 |      |
| $t_f$     | Fall time, CLKOUT, AWD, TDO                                                     | $C_L = 15\text{ pF}$  | 0.5 | 2.5  | ns   |
|           |                                                                                 | $C_L = 50\text{ pF}$  | 1.5 | 5    |      |
|           |                                                                                 | $C_L = 100\text{ pF}$ | 3   | 9    |      |
|           |                                                                                 | $C_L = 150\text{ pF}$ | 4.5 | 12.5 |      |
| $t_r$     | Rise time, SPInCLK, SPInSOMI, SPInSIMO <sup>(1)</sup>                           | $C_L = 15\text{ pF}$  | 2.5 | 8    | ns   |
|           |                                                                                 | $C_L = 50\text{ pF}$  | 5   | 14   |      |
|           |                                                                                 | $C_L = 100\text{ pF}$ | 9   | 23   |      |
|           |                                                                                 | $C_L = 150\text{ pF}$ | 13  | 32   |      |
| $t_f$     | Fall time, $\overline{\text{RST}}$ , SPInCLK, SPInSOMI, SPInSIMO <sup>(1)</sup> | $C_L = 15\text{ pF}$  | 2.5 | 8    | ns   |
|           |                                                                                 | $C_L = 50\text{ pF}$  | 5   | 14   |      |
|           |                                                                                 | $C_L = 100\text{ pF}$ | 9   | 23   |      |
|           |                                                                                 | $C_L = 150\text{ pF}$ | 13  | 32   |      |
| $t_r$     | Rise time, all other output pins                                                | $C_L = 15\text{ pF}$  | 2.5 | 12   | ns   |
|           |                                                                                 | $C_L = 50\text{ pF}$  | 6.0 | 28   |      |
|           |                                                                                 | $C_L = 100\text{ pF}$ | 12  | 50   |      |
|           |                                                                                 | $C_L = 150\text{ pF}$ | 18  | 73   |      |
| $t_f$     | Fall time, all other output pins                                                | $C_L = 15\text{ pF}$  | 3   | 12   | ns   |
|           |                                                                                 | $C_L = 50\text{ pF}$  | 8.5 | 28   |      |
|           |                                                                                 | $C_L = 100\text{ pF}$ | 16  | 50   |      |
|           |                                                                                 | $C_L = 150\text{ pF}$ | 23  | 73   |      |

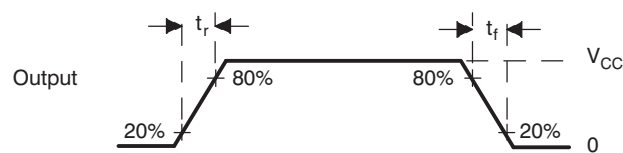 (1) Where  $n = 1-5$ .


**Figure 10. CMOS-Level Outputs**


## INPUT TIMINGS

### Timing Requirements for Input Timings<sup>(1)</sup>

(see [Figure 11](#))

|          |                           | MIN                | MAX | UNIT |
|----------|---------------------------|--------------------|-----|------|
| $t_{pw}$ | Input minimum pulse width | $t_{c(ICLK)} + 10$ |     | ns   |

(1)  $t_{c(ICLK)}$  = interface clock cycle time =  $1 / f_{(ICLK)}$

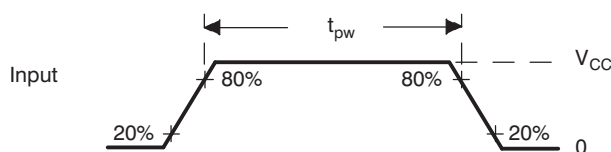

**Figure 11. CMOS-Level Inputs**

## FLASH TIMINGS

### Timing Requirements for Program Flash<sup>(1)</sup>

|                     |                                                                            | MIN   | TYP | MAX | UNIT    |
|---------------------|----------------------------------------------------------------------------|-------|-----|-----|---------|
| $t_{prog(16-bit)}$  | Half word (16-bit) programming time                                        | 4     | 16  | 200 | $\mu$ s |
| $t_{prog(Total)}$   | 768K-byte programming time <sup>(2)</sup>                                  |       | 6   | 20  | s       |
| $t_{erase(sector)}$ | Sector erase time                                                          |       | 1.7 |     | s       |
| $t_{wec}$           | Write/erase cycles at $T_A = -40^{\circ}\text{C}$ to $125^{\circ}\text{C}$ | 50000 |     |     | cycles  |

(1) For more detailed information on the flash core sectors, see the *flash program and erase* section of this data sheet.

(2) The 768K-byte programming time includes overhead of state machine.

## SPIn MASTER MODE TIMING PARAMETERS

### SPIn Master Mode External Timing Parameters

(CLOCK PHASE = 0, SPInCLK = output, SPInSIMO = output, and SPInSOMI = input)<sup>(1)(2)(3)</sup> (see Figure 12)

| NO.              |                      |                                                                         | MIN                     | MAX                  | UNIT |
|------------------|----------------------|-------------------------------------------------------------------------|-------------------------|----------------------|------|
| 1                | $t_{c(SPC)M}$        | Cycle time, SPInCLK <sup>(4)</sup>                                      | 100                     | $256t_{c(ICLK)}$     | ns   |
| 2 <sup>(5)</sup> | $t_{w(SPCH)M}$       | Pulse duration, SPInCLK high (clock polarity = 0)                       | $0.5t_{c(SPC)M} - t_r$  | $0.5t_{c(SPC)M} + 5$ | ns   |
|                  | $t_{w(SPCL)M}$       | Pulse duration, SPInCLK low (clock polarity = 1)                        | $0.5t_{c(SPC)M} - t_f$  | $0.5t_{c(SPC)M} + 5$ |      |
| 3 <sup>(5)</sup> | $t_{w(SPCL)M}$       | Pulse duration, SPInCLK low (clock polarity = 0)                        | $0.5t_{c(SPC)M} - t_f$  | $0.5t_{c(SPC)M} + 5$ | ns   |
|                  | $t_{w(SPCH)M}$       | Pulse duration, SPInCLK high (clock polarity = 1)                       | $0.5t_{c(SPC)M} - t_r$  | $0.5t_{c(SPC)M} + 5$ |      |
| 4 <sup>(5)</sup> | $t_{d(SPCH-SIMO)M}$  | Delay time, SPInCLK high to SPInSIMO valid (clock polarity = 0)         |                         | 10                   | ns   |
|                  | $t_{d(SPCL-SIMO)M}$  | Delay time, SPInCLK low to SPInSIMO valid (clock polarity = 1)          |                         | 10                   |      |
| 5 <sup>(5)</sup> | $t_{v(SPCL-SIMO)M}$  | Valid time, SPInSIMO data valid after SPInCLK low (clock polarity = 0)  | $t_{c(SPC)M} - 5 - t_f$ |                      | ns   |
|                  | $t_{v(SPCH-SIMO)M}$  | Valid time, SPInSIMO data valid after SPInCLK high (clock polarity = 1) | $t_{c(SPC)M} - 5 - t_r$ |                      |      |
| 6 <sup>(5)</sup> | $t_{su(SOMI-SPCL)M}$ | Setup time, SPInSOMI before SPInCLK low (clock polarity = 0)            | 6                       |                      | ns   |
|                  | $t_{su(SOMI-SPCH)M}$ | Setup time, SPInSOMI before SPInCLK high (clock polarity = 1)           | 6                       |                      |      |
| 7 <sup>(5)</sup> | $t_{v(SPCL-SOMI)M}$  | Valid time, SPInSOMI data valid after SPInCLK low (clock polarity = 0)  | 4                       |                      | ns   |
|                  | $t_{v(SPCH-SOMI)M}$  | Valid time, SPInSOMI data valid after SPInCLK high (clock polarity = 1) | 4                       |                      |      |

(1) The MASTER bit (SPInCTRL2.3) is set and the CLOCK PHASE bit (SPInCTRL2.0) is cleared.

(2)  $t_{c(ICLK)}$  = interface clock cycle time =  $1/f_{(ICLK)}$


(3) For rise and fall timings, see the "Switching Characteristics for Output Timings versus Load Capacitance" table.

(4) When the SPI is in master mode, the following must be true:

For PS values from 1 to 255:  $t_{c(SPC)M} \geq (PS + 1)t_{c(ICLK)} \geq 100$  ns, where PS is the prescale value set in the SPInCTL1[12:5] register bits.

For PS values of 0:  $t_{c(SPC)M} = 2t_{c(ICLK)} \geq 100$  ns.

(5) The active edge of the SPInCLK signal referenced is controlled by the CLOCK POLARITY bit (SPInCTRL2.1).

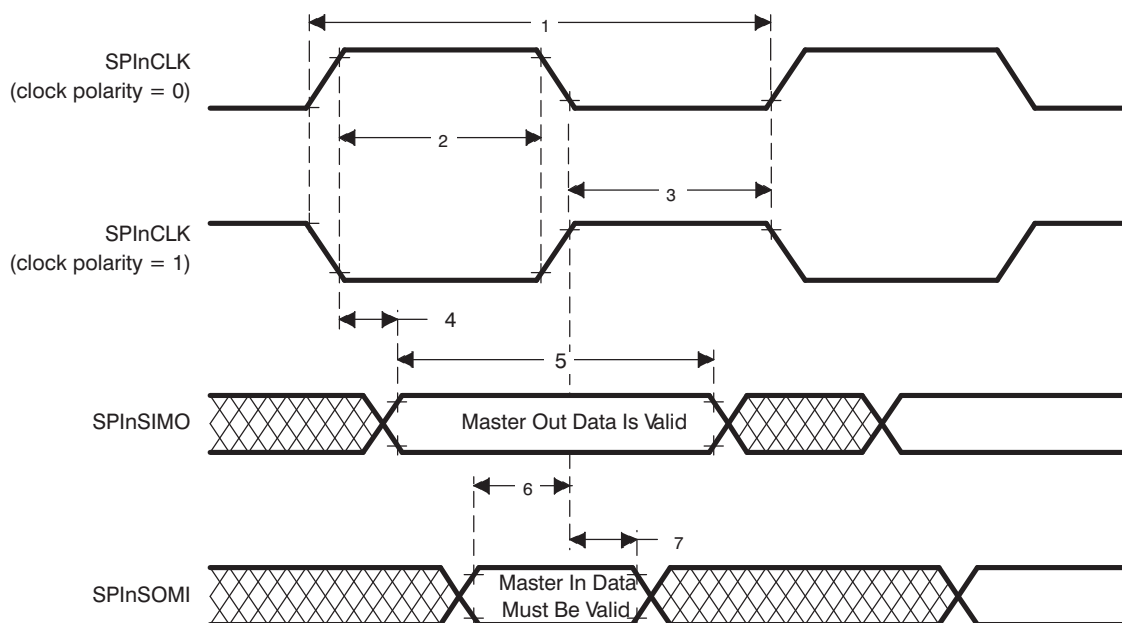

**Figure 12. SPIn Master Mode External Timing (CLOCK PHASE = 0)**

### SPIn Master Mode External Timing Parameters

(CLOCK PHASE = 1, SPInCLK = output, SPInSIMO = output, and SPInSOMI = input)<sup>(1)(2)(3)</sup> (see Figure 13)

(1) The MASTER bit (SPInCTRL2.3) is set and the CLOCK PHASE bit (SPInCTRL2.0) is set.

(2)  $t_{c(ICLK)}$  = interface clock cycle time =  $1/f_{(ICLK)}$

(3) For rise and fall timings, see the "Switching Characteristics for Output Timings versus Load Capacitance" table.


**SPIn Master Mode External Timing Parameters (continued)**(CLOCK PHASE = 1, SPInCLK = output, SPInSIMO = output, and SPInSOMI = input) (see [Figure 13](#))

| NO.              |                      |                                                                         | MIN                        | MAX                  | UNIT |
|------------------|----------------------|-------------------------------------------------------------------------|----------------------------|----------------------|------|
| 1                | $t_{c(SPC)M}$        | Cycle time, SPInCLK <sup>(4)</sup>                                      | 100                        | $256t_{c(ICK)M}$     | ns   |
| 2 <sup>(5)</sup> | $t_{w(SPCH)M}$       | Pulse duration, SPInCLK high (clock polarity = 0)                       | $0.5t_{c(SPC)M} - t_r$     | $0.5t_{c(SPC)M} + 5$ | ns   |
|                  | $t_{w(SPCL)M}$       | Pulse duration, SPInCLK low (clock polarity = 1)                        | $0.5t_{c(SPC)M} - t_f$     | $0.5t_{c(SPC)M} + 5$ |      |
| 3 <sup>(5)</sup> | $t_{w(SPCL)M}$       | Pulse duration, SPInCLK low (clock polarity = 0)                        | $0.5t_{c(SPC)M} - t_f$     | $0.5t_{c(SPC)M} + 5$ | ns   |
|                  | $t_{w(SPCH)M}$       | Pulse duration, SPInCLK high (clock polarity = 1)                       | $0.5t_{c(SPC)M} - t_r$     | $0.5t_{c(SPC)M} + 5$ |      |
| 4 <sup>(5)</sup> | $t_{v(SIMO-SPCH)M}$  | Valid time, SPInCLK high after SPInSIMO data valid (clock polarity = 0) | $0.5t_{c(SPC)M} - 15$      |                      | ns   |
|                  | $t_{v(SIMO-SPCL)M}$  | Valid time, SPInCLK low after SPInSIMO data valid (clock polarity = 1)  | $0.5t_{c(SPC)M} - 15$      |                      |      |
| 5 <sup>(5)</sup> | $t_{v(SPCH-SIMO)M}$  | Valid time, SPInSIMO data valid after SPInCLK high (clock polarity = 0) | $0.5t_{c(SPC)M} - 5 - t_r$ |                      | ns   |
|                  | $t_{v(SPCL-SIMO)M}$  | Valid time, SPInSIMO data valid after SPInCLK low (clock polarity = 1)  | $0.5t_{c(SPC)M} - 5 - t_f$ |                      |      |
| 6 <sup>(5)</sup> | $t_{su(SOMI-SPCH)M}$ | Setup time, SPInSOMI before SPInCLK high (clock polarity = 0)           | 6                          |                      | ns   |
|                  | $t_{su(SOMI-SPCL)M}$ | Setup time, SPInSOMI before SPInCLK low (clock polarity = 1)            | 6                          |                      |      |
| 7 <sup>(5)</sup> | $t_{v(SPCH-SOMI)M}$  | Valid time, SPInSOMI data valid after SPInCLK high (clock polarity = 0) | 4                          |                      | ns   |
|                  | $t_{v(SPCL-SOMI)M}$  | Valid time, SPInSOMI data valid after SPInCLK low (clock polarity = 1)  | 4                          |                      |      |

(4) When the SPI is in master mode, the following must be true:

For PS values from 1 to 255:  $t_{c(SPC)M} \geq (PS + 1)t_{c(ICK)M} \geq 100$  ns, where PS is the prescale value set in the SPInCTL1[12:5] register bits.For PS values of 0:  $t_{c(SPC)M} = 2t_{c(ICK)M} \geq 100$  ns.

(5) The active edge of the SPInCLK signal referenced is controlled by the CLOCK POLARITY bit (SPInCTRL2.1).

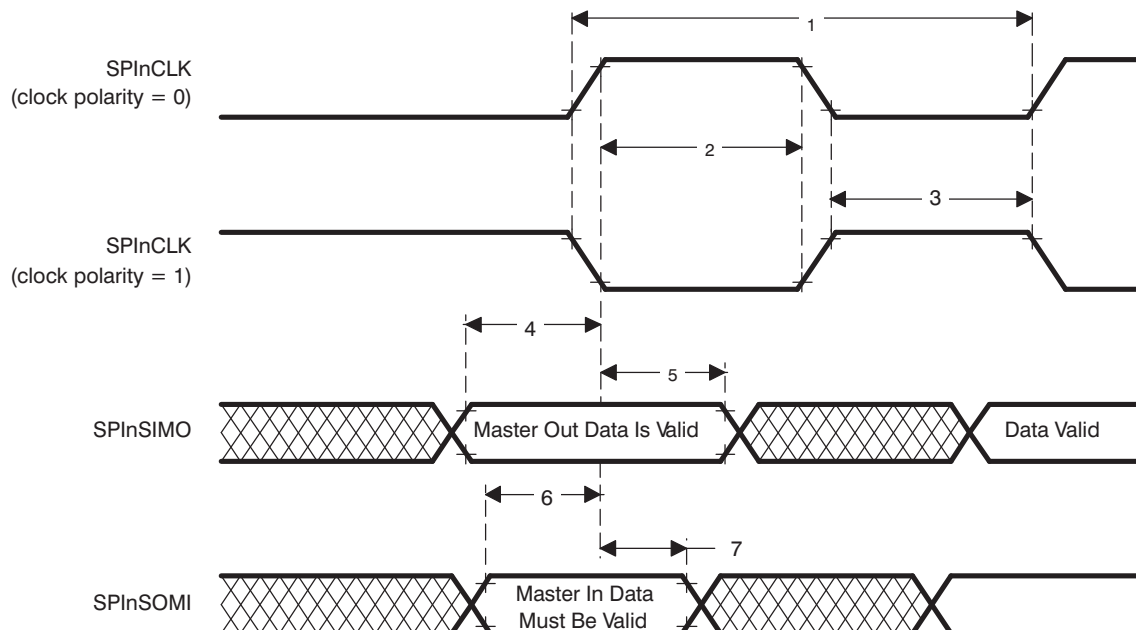**Figure 13. SPIn Master Mode External Timing (CLOCK PHASE = 1)**


## SPIn SLAVE MODE TIMING PARAMETERS

### SPIn Slave Mode External Timing Parameters

(CLOCK PHASE = 0, SPInCLK = input, SPInSIMO = input, and SPInSOMI = output)<sup>(1)(2)(3)(4)</sup> (see Figure 14)

| NO.              |                      |                                                                         | MIN                                | MAX                                | UNIT |
|------------------|----------------------|-------------------------------------------------------------------------|------------------------------------|------------------------------------|------|
| 1                | $t_{c(SPC)S}$        | Cycle time, SPInCLK <sup>(5)</sup>                                      | 100                                | $256t_{c(ICK)S}$                   | ns   |
| 2 <sup>(6)</sup> | $t_{w(SPCH)S}$       | Pulse duration, SPInCLK high (clock polarity = 0)                       | $0.5t_{c(SPC)S} - 0.25t_{c(ICK)S}$ | $0.5t_{c(SPC)S} + 0.25t_{c(ICK)S}$ | ns   |
|                  | $t_{w(SPCL)S}$       | Pulse duration, SPInCLK low (clock polarity = 1)                        | $0.5t_{c(SPC)S} - 0.25t_{c(ICK)S}$ | $0.5t_{c(SPC)S} + 0.25t_{c(ICK)S}$ |      |
| 3 <sup>(6)</sup> | $t_{w(SPCL)S}$       | Pulse duration, SPInCLK low (clock polarity = 0)                        | $0.5t_{c(SPC)S} - 0.25t_{c(ICK)S}$ | $0.5t_{c(SPC)S} + 0.25t_{c(ICK)S}$ | ns   |
|                  | $t_{w(SPCH)S}$       | Pulse duration, SPInCLK high (clock polarity = 1)                       | $0.5t_{c(SPC)S} - 0.25t_{c(ICK)S}$ | $0.5t_{c(SPC)S} + 0.25t_{c(ICK)S}$ |      |
| 4 <sup>(6)</sup> | $t_{d(SPCH-SOMI)S}$  | Delay time, SPInCLK high to SPInSOMI valid (clock polarity = 0)         |                                    | $6 + t_r$                          | ns   |
|                  | $t_{d(SPCL-SOMI)S}$  | Delay time, SPInCLK low to SPInSOMI valid (clock polarity = 1)          |                                    | $6 + t_f$                          |      |
| 5 <sup>(6)</sup> | $t_{v(SPCH-SOMI)S}$  | Valid time, SPInSOMI data valid after SPInCLK high (clock polarity = 0) | $t_{c(SPC)S} - 6 - t_r$            |                                    | ns   |
|                  | $t_{v(SPCL-SOMI)S}$  | Valid time, SPInSOMI data valid after SPInCLK low (clock polarity = 1)  | $t_{c(SPC)S} - 6 - t_f$            |                                    |      |
| 6 <sup>(6)</sup> | $t_{su(SIMO-SPCL)S}$ | Setup time, SPInSIMO before SPInCLK low (clock polarity = 0)            | 6                                  |                                    | ns   |
|                  | $t_{su(SIMO-SPCH)S}$ | Setup time, SPInSIMO before SPInCLK high (clock polarity = 1)           | 6                                  |                                    |      |
| 7 <sup>(6)</sup> | $t_{v(SPCL-SIMO)S}$  | Valid time, SPInSIMO data valid after SPInCLK low (clock polarity = 0)  | 6                                  |                                    | ns   |
|                  | $t_{v(SPCH-SIMO)S}$  | Valid time, SPInSIMO data valid after SPInCLK high (clock polarity = 1) | 6                                  |                                    |      |

- (1) The MASTER bit (SPInCTL2.3) is cleared and the CLOCK PHASE bit (SPInCTL2.0) is cleared.
- (2) If the SPI is in slave mode, the following must be true:  $t_{c(SPC)S} \geq (PS + 1)t_{c(ICK)S}$ , where PS = prescale value set in SPInCTL1[12:5].
- (3) For rise and fall timings, see the "Switching Characteristics for Output Timings versus Load Capacitance" table.
- (4)  $t_{c(ICK)S} = \text{interface clock cycle time} = 1/f_{(ICK)}$
- (5) When the SPIn is in slave mode, the following must be true:  
For PS values from 1 to 255:  $t_{c(SPC)S} \geq (PS + 1)t_{c(ICK)S} \geq 100 \text{ ns}$ , where PS is the prescale value set in the SPInCTL1[12:5] register bits.  
For PS values of 0:  $t_{c(SPC)S} = 2t_{c(ICK)S} \geq 100 \text{ ns}$ .
- (6) The active edge of the SPInCLK signal referenced is controlled by the CLOCK POLARITY bit (SPInCTL2.1).

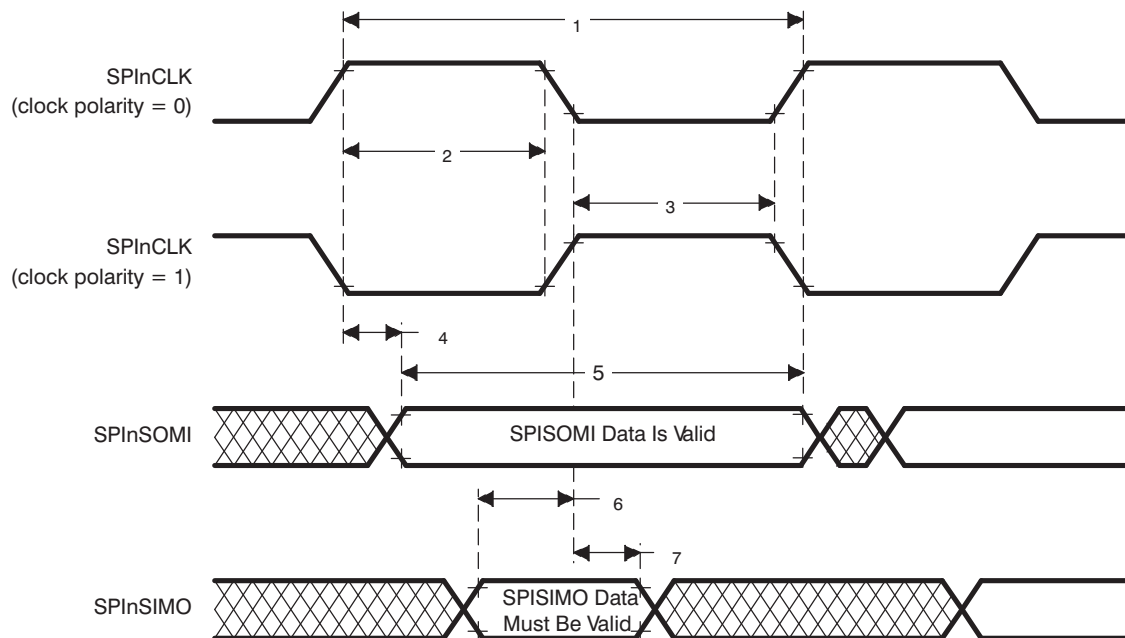

**Figure 14. SPIn Slave Mode External Timing (CLOCK PHASE = 0)**

## SPIn Slave Mode External Timing Parameters

(CLOCK PHASE = 1, SPInCLK = input, SPInSIMO = input, and SPInSOMI = output)<sup>(1)(2)(3)(4)</sup> (see Figure 15)

| NO.              |                                          |                                                                         | MIN                                                              | MAX                                                              | UNIT |
|------------------|------------------------------------------|-------------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------|------|
| 1                | t <sub>c</sub> (SPC) <sub>S</sub>        | Cycle time, SPInCLK <sup>(5)</sup>                                      | 100                                                              | 256t <sub>c</sub> (ICLK)                                         | ns   |
| 2 <sup>(6)</sup> | t <sub>w</sub> (SPCH) <sub>S</sub>       | Pulse duration, SPInCLK high (clock polarity = 0)                       | 0.5t <sub>c</sub> (SPC) <sub>S</sub> − 0.25t <sub>c</sub> (ICLK) | 0.5t <sub>c</sub> (SPC) <sub>S</sub> + 0.25t <sub>c</sub> (ICLK) | ns   |
|                  | t <sub>w</sub> (SPCL) <sub>S</sub>       | Pulse duration, SPInCLK low (clock polarity = 1)                        | 0.5t <sub>c</sub> (SPC) <sub>S</sub> − 0.25t <sub>c</sub> (ICLK) | 0.5t <sub>c</sub> (SPC) <sub>S</sub> + 0.25t <sub>c</sub> (ICLK) |      |
| 3 <sup>(6)</sup> | t <sub>w</sub> (SPCL) <sub>S</sub>       | Pulse duration, SPInCLK low (clock polarity = 0)                        | 0.5t <sub>c</sub> (SPC) <sub>S</sub> − 0.25t <sub>c</sub> (ICLK) | 0.5t <sub>c</sub> (SPC) <sub>S</sub> + 0.25t <sub>c</sub> (ICLK) | ns   |
|                  | t <sub>w</sub> (SPCH) <sub>S</sub>       | Pulse duration, SPInCLK high (clock polarity = 1)                       | 0.5t <sub>c</sub> (SPC) <sub>S</sub> − 0.25t <sub>c</sub> (ICLK) | 0.5t <sub>c</sub> (SPC) <sub>S</sub> + 0.25t <sub>c</sub> (ICLK) |      |
| 4 <sup>(6)</sup> | t <sub>v</sub> (SOMI-SPCH) <sub>S</sub>  | Valid time, SPInCLK high after SPInSOMI data valid (clock polarity = 0) | 0.5t <sub>c</sub> (SPC) <sub>S</sub> − 6 − t <sub>r</sub>        |                                                                  | ns   |
|                  | t <sub>v</sub> (SOMI-SPCL) <sub>S</sub>  | Valid time, SPInCLK low after SPInSOMI data valid (clock polarity = 1)  | 0.5t <sub>c</sub> (SPC) <sub>S</sub> − 6 − t <sub>f</sub>        |                                                                  |      |
| 5 <sup>(6)</sup> | t <sub>v</sub> (SPCH-SOMI) <sub>S</sub>  | Valid time, SPInSOMI data valid after SPInCLK high (clock polarity = 0) | 0.5t <sub>c</sub> (SPC) <sub>S</sub> − 6 − t <sub>r</sub>        |                                                                  | ns   |
|                  | t <sub>v</sub> (SPCL-SOMI) <sub>S</sub>  | Valid time, SPInSOMI data valid after SPInCLK low (clock polarity = 1)  | 0.5t <sub>c</sub> (SPC) <sub>S</sub> − 6 − t <sub>f</sub>        |                                                                  |      |
| 6 <sup>(6)</sup> | t <sub>su</sub> (SIMO-SPCH) <sub>S</sub> | Setup time, SPInSIMO before SPInCLK high (clock polarity = 0)           | 6                                                                |                                                                  | ns   |
|                  | t <sub>su</sub> (SIMO-SPCL) <sub>S</sub> | Setup time, SPInSIMO before SPInCLK low (clock polarity = 1)            | 6                                                                |                                                                  |      |
| 7 <sup>(6)</sup> | t <sub>v</sub> (SPCH-SIMO) <sub>S</sub>  | Valid time, SPInSIMO data valid after SPInCLK high (clock polarity = 0) | 6                                                                |                                                                  | ns   |
|                  | t <sub>v</sub> (SPCL-SIMO) <sub>S</sub>  | Valid time, SPInSIMO data valid after SPInCLK low (clock polarity = 1)  | 6                                                                |                                                                  |      |

(1) The MASTER bit (SPInCTRL2.3) is cleared and the CLOCK PHASE bit (SPInCTRL2.0) is set.

(2) If the SPI is in slave mode, the following must be true:  $t_{c(SPC)S} \geq (PS + 1) t_{c(ICKL)}$ , where PS = prescale value set in SPInCTL1[12:5].

(3) For rise and fall timings, see the "Switching Characteristics for Output Timings versus Load Capacitance" table.

(4)  $t_{c(ICKL)}$  = interface clock cycle time =  $1/f_{(ICKL)}$

(5) When the SPIn is in slave mode, the following must be true:

For PS values from 1 to 255:  $t_{c(SPC)S} \geq (PS + 1)t_{c(ICKL)} \geq 100$  ns, where PS is the prescale value set in the SPInCTL1[12:5] register bits.

For PS values of 0:  $t_{c(SPC)S} = 2t_{c(ICKL)} \geq 100$  ns.

(6) The active edge of the SPInCLK signal referenced is controlled by the CLOCK POLARITY bit (SPInCTRL2.1).

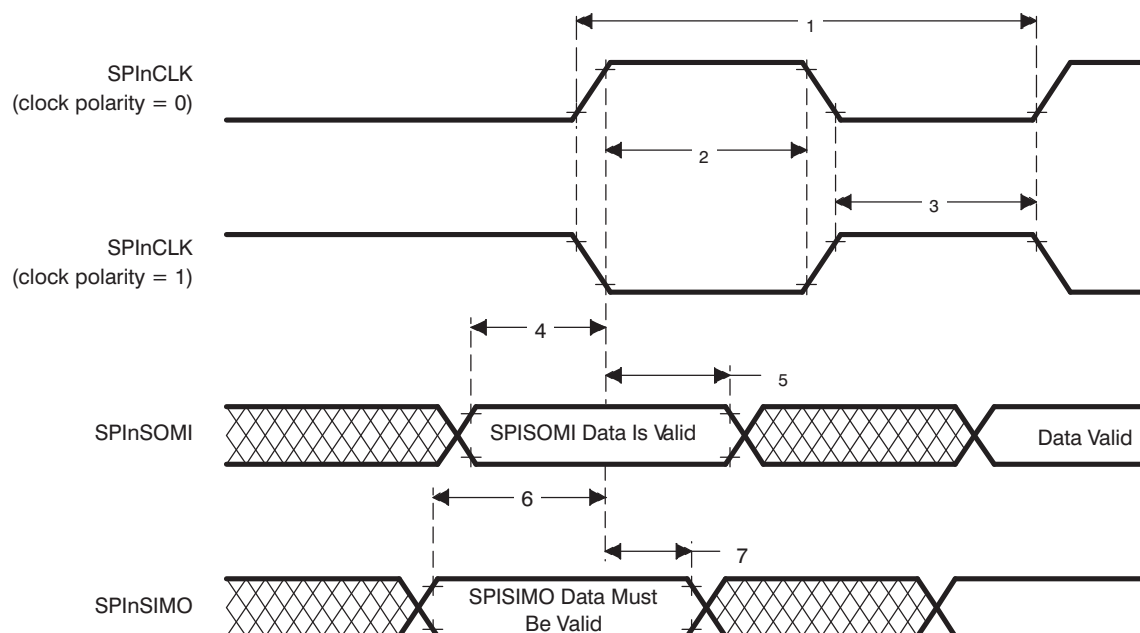


Figure 15. SPIn Slave Mode External Timing (CLOCK PHASE = 1)

## SCI<sub>n</sub> ISOSYNCHRONOUS MODE TIMINGS INTERNAL CLOCK

### Timing Requirements for Internal Clock SCI<sub>n</sub> Isosynchronous Mode<sup>(1)(2)(3)</sup>


(see Figure 16)

|                   |                                                                              | (BAUD + 1)<br>IS EVEN OR BAUD = 0 |                      | (BAUD + 1)<br>IS ODD AND BAUD ≠ 0      |                                  | UNIT |
|-------------------|------------------------------------------------------------------------------|-----------------------------------|----------------------|----------------------------------------|----------------------------------|------|
|                   |                                                                              | MIN                               | MAX                  | MIN                                    | MAX                              |      |
| $t_{c(SCC)}$      | Cycle time,<br>SCI <sub>n</sub> CLK                                          | $2t_{c(ICLK)}$                    | $2^{24} t_{c(ICLK)}$ | $3t_{c(ICLK)}$                         | $(2^{24} - 1) t_{c(ICLK)}$       | ns   |
| $t_w(SCCL)$       | Pulse duration,<br>SCI <sub>n</sub> CLK low                                  | $0.5t_{c(SCC)} - t_f$             | $0.5t_{c(SCC)} + 5$  | $0.5t_{c(SCC)} + 0.5t_{c(ICLK)} - t_f$ | $0.5t_{c(SCC)} + 0.5t_{c(ICLK)}$ | ns   |
| $t_w(SCCH)$       | Pulse duration,<br>SCI <sub>n</sub> CLK high                                 | $0.5t_{c(SCC)} - t_r$             | $0.5t_{c(SCC)} + 5$  | $0.5t_{c(SCC)} - 0.5t_{c(ICLK)} - t_r$ | $0.5t_{c(SCC)} - 0.5t_{c(ICLK)}$ | ns   |
| $t_d(SCCH-TXV)$   | Delay time,<br>SCI <sub>n</sub> CLK high to<br>SCI <sub>n</sub> TX valid     |                                   | 10                   |                                        | 10                               | ns   |
| $t_v(TX)$         | Valid time,<br>SCI <sub>n</sub> TX data<br>after SCI <sub>n</sub> CLK<br>low | $t_{c(SCC)} - 10$                 |                      | $t_{c(SCC)} - 10$                      |                                  | ns   |
| $t_{su}(RX-SCCL)$ | Setup time,<br>SCI <sub>n</sub> RX before<br>SCI <sub>n</sub> CLK low        | $t_{c(ICLK)} + t_f + 20$          |                      | $t_{c(ICLK)} + t_f + 20$               |                                  | ns   |
| $t_v(SCCL-RX)$    | Valid time,<br>SCI <sub>n</sub> RX data<br>after SCI <sub>n</sub> CLK<br>low | $-t_{c(ICLK)} + t_f + 20$         |                      | $-t_{c(ICLK)} + t_f + 20$              |                                  | ns   |

(1) BAUD = 24-bit concatenated value formed by the SCI[H,M,L]BAUD registers.

(2)  $t_{c(ICLK)}$  = interface clock cycle time =  $1/f_{(ICLK)}$

(3) For rise and fall timings, see the "Switching Characteristics for Output Timings versus Load Capacitance" table.

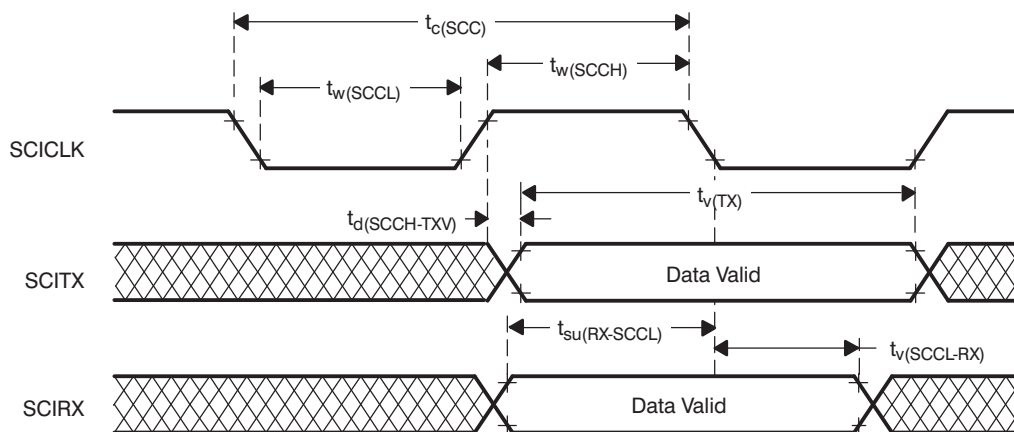

- A. Data transmission/reception characteristics for isosynchronous mode with internal clocking are similar to the asynchronous mode. Data transmission occurs on the SCICLK rising edge, and data reception occurs on the SCICLK falling edge.

**Figure 16. SCI<sub>n</sub> Isosynchronous Mode Timing Diagram for Internal Clock**

## SCIn ISOSYNCHRONOUS MODE TIMINGS EXTERNAL CLOCK

### Timing Requirements for External Clock SCIn Isosynchronous Mode<sup>(1)(2)</sup>


(see [Figure 17](#))

|                   |                                           | MIN                              | MAX                              | UNIT |
|-------------------|-------------------------------------------|----------------------------------|----------------------------------|------|
| $t_{c(SCC)}$      | Cycle time, SCInCLK <sup>(3)</sup>        | $8t_{c(ICK)}$                    |                                  | ns   |
| $t_{w(SCCH)}$     | Pulse duration, SCInCLK high              | $0.5t_{c(SCC)} - 0.25t_{c(ICK)}$ | $0.5t_{c(SCC)} + 0.25t_{c(ICK)}$ | ns   |
| $t_{w(SCCL)}$     | Pulse duration, SCInCLK low               | $0.5t_{c(SCC)} - 0.25t_{c(ICK)}$ | $0.5t_{c(SCC)} + 0.25t_{c(ICK)}$ | ns   |
| $t_{d(SCCH-TXV)}$ | Delay time, SCInCLK high to SCInTX valid  |                                  | $2t_{c(ICK)} + 12 + t_r$         | ns   |
| $t_{v(TX)}$       | Valid time, SCInTX data after SCInCLK low | $2t_{c(SCC)} - 10$               |                                  | ns   |
| $t_{su(RX-SCCL)}$ | Setup time, SCInRX before SCInCLK low     | 0                                |                                  | ns   |
| $t_{v(SCCL-RX)}$  | Valid time, SCInRX data after SCInCLK low | $2t_{c(ICK)} + 10$               |                                  | ns   |

(1)  $t_{c(ICK)}$  = interface clock cycle time =  $1/f_{(ICK)}$

(2) For rise and fall timings, see the "Switching Characteristics for Output Timings versus Load Capacitance" table.

(3) When driving an external SCInCLK, the following must be true:  $t_{c(SCC)} \geq 8t_{c(ICK)}$ .

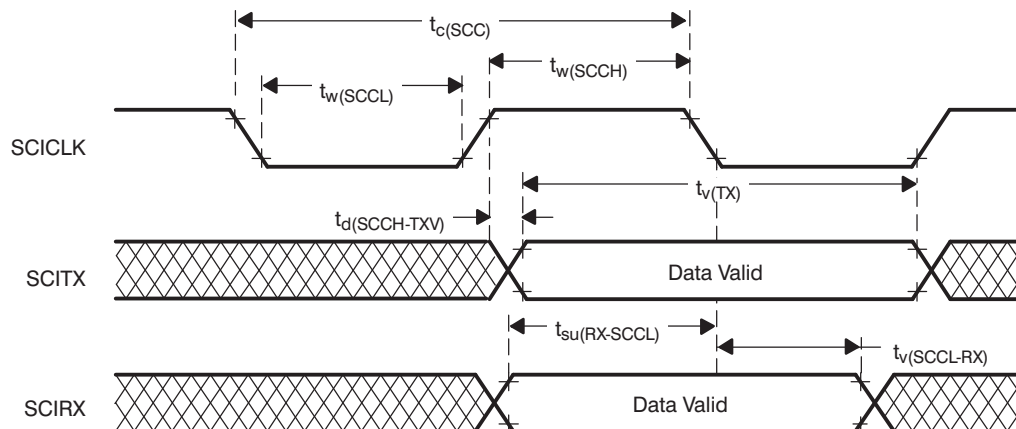

- A. Data transmission / reception characteristics for isosynchronous mode with external clocking are similar to the asynchronous mode. Data transmission occurs on the SCICLK rising edge, and data reception occurs on the SCICLK falling edge.

**Figure 17. SCIn Isosynchronous Mode Timing Diagram for External Clock**

## HIGH-END TIMER (HET) TIMINGS

### Minimum PWM Output Pulse Width:

This is equal to one high resolution clock period (HRP). The HRP is defined by the 6-bit high resolution prescale factor (hr), which is user defined, giving prescale factors of 1 to 64, with a linear increment of codes.

Therefore, the minimum PWM output pulse width =  $HRP(\min) = hr(\min)/SYSCLK = 1/SYSCLK$

For example, for a SYSCLK of 30 MHz, the minimum PWM output pulse width =  $1/30 = 33.33\text{ns}$

### Minimum Input Pulses that Can Be Captured:

The input pulse width must be greater or equal to the low resolution clock period (LRP), i.e., the HET loop (the HET program must fit within the LRP). The LRP is defined by the 3-bit loop-resolution prescale factor (lr), which is user defined, with a power of 2 increment of codes. That is, the value of lr can be 1, 2, 4, 8, 16, or 32.

Therefore, the minimum input pulse width =  $LRP(\min) = hr(\min) * lr(\min)/SYSCLK = 1 * 1/SYSCLK$

For example, with a SYSCLK of 30 MHz, the minimum input pulse width =  $1 * 1/30 = 33.33\text{ ns}$

#### NOTE:

Once the input pulse width is greater than LRP, the resolution of the measurement is still HRP. (That is, the captured value gives the number of HRP clocks inside the pulse.)

Abbreviations:

hr = HET high resolution divide rate = 1, 2, 3,...63, 64

lr = HET low resolution divide rate = 1, 2, 4, 8, 16, 32

High resolution clock period =  $HRP = hr/SYSCLK$

Loop resolution clock period =  $LRP = hr*lr/SYSCLK$

## HIGH-END CAN CONTROLLER (HECCn) MODE TIMINGS

### Dynamic Characteristics for the CANnHTX and CANnHRX Pins

| PARAMETER        |                                                                   | MIN | MAX | UNIT |
|------------------|-------------------------------------------------------------------|-----|-----|------|
| $t_{d(CANnHTX)}$ | Delay time, transmit shift register to CANnHTX pin <sup>(1)</sup> |     | 15  | ns   |
| $t_{d(CANnHRX)}$ | Delay time, CANnHRX pin to receive shift register                 |     | 5   | ns   |

(1) These values do not include rise/fall times of the output buffer.

## MULTI-BUFFERED A-TO-D CONVERTER (MibADC)

The multi-buffered A-to-D converter (MibADC) has a separate power bus for its analog circuitry that enhances the A-to-D performance by preventing digital switching noise on the logic circuitry, which could be present on  $V_{SS}$  and  $V_{CC}$ , from coupling into the A-to-D analog stage. All A-to-D specifications are given with respect to  $AD_{REFLO}$  unless otherwise noted.

|                        |                                                                                    |
|------------------------|------------------------------------------------------------------------------------|
| Resolution             | 10 bits (1024 values)                                                              |
| Monotonic              | Assured                                                                            |
| Output conversion code | 00h to 3FFh [00 for $V_{AI} \leq AD_{REFLO}$ ; 3FFh for $V_{AI} \geq AD_{REFHI}$ ] |

**Table 10. MibADC Recommended Operating Conditions<sup>(1)</sup>**

|              |                                                                                                         | MIN              | MAX              | UNIT |
|--------------|---------------------------------------------------------------------------------------------------------|------------------|------------------|------|
| $AD_{REFHI}$ | A-to-D high-voltage reference source                                                                    | $V_{SSAD}$       | $V_{CCAD}$       | V    |
| $AD_{REFLO}$ | A-to-D low-voltage reference source                                                                     | $V_{SSAD}$       | $V_{CCAD}$       | V    |
| $V_{AI}$     | Analog input voltage                                                                                    | $V_{SSAD} - 0.3$ | $V_{CCAD} + 0.3$ | V    |
| $I_{AIC}$    | Analog input clamp current <sup>(2)</sup><br>( $V_{AI} < V_{SSAD} - 0.3$ or $V_{AI} > V_{CCAD} + 0.3$ ) | -2               | 2                | mA   |

(1) For  $V_{CCAD}$  and  $V_{SSAD}$  recommended operating conditions, see the "Device Recommended Operating Conditions" table.


(2) Input currents into any ADC input channel outside the specified limits could affect conversion results of other channels.

**Table 11. Operating Characteristics Over Full Ranges of Recommended Operating Conditions<sup>(1)(2)</sup>**

| PARAMETER     | DESCRIPTION/CONDITIONS                                       | MIN                                                                                                                                                 | TYP | MAX        | UNIT         |
|---------------|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----|------------|--------------|
| $R_I$         | Analog input resistance                                      | See Figure 18.                                                                                                                                      |     | 250        | 500 $\Omega$ |
| $C_I$         | Analog input capacitance                                     | See Figure 18.                                                                                                                                      |     | Conversion | 10 pF        |
|               |                                                              |                                                                                                                                                     |     | Sampling   | 30 pF        |
| $I_{AIL}$     | Analog input leakage current                                 | See Figure 18.                                                                                                                                      |     | -1         | 1 $\mu A$    |
| $I_{ADREFHI}$ | $AD_{REFHI}$ input current                                   | $AD_{REFHI} = 3.6 V$ , $AD_{REFLO} = V_{SSAD}$                                                                                                      |     | 5          | mA           |
| CR            | Conversion range over which specified accuracy is maintained | $AD_{REFHI} - AD_{REFLO}$                                                                                                                           |     | 3          | 3.6 V        |
| $E_{DNL}$     | Differential nonlinearity error                              | Difference between the actual step width and the ideal value. See Figure 19.                                                                        |     | $\pm 1.5$  | LSB          |
| $E_{INL}$     | Integral nonlinearity error                                  | Maximum deviation from the best straight line through the MibADC. MibADC transfer characteristics, excluding the quantization error. See Figure 20. |     | $\pm 2.0$  | LSB          |
| $E_{TOT}$     | Total error/absolute accuracy                                | Maximum value of the difference between an analog value and the ideal midstep value. See Figure 21.                                                 |     | $\pm 2$    | LSB          |

(1)  $V_{CCAD} = AD_{REFHI}$

(2) 1 LSB =  $(AD_{REFHI} - AD_{REFLO})/2^{10}$  for the MibADC

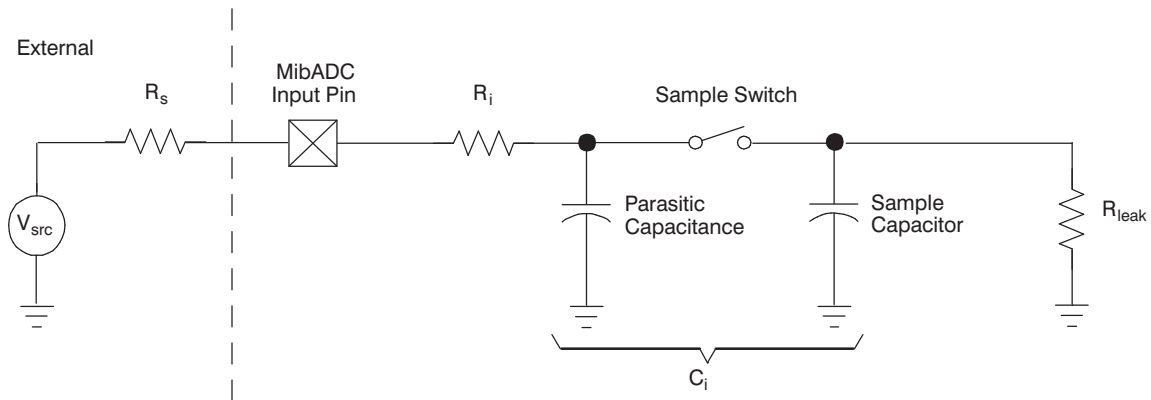


**Figure 18. MibADC Input Equivalent Circuit**

### Multi-Buffer ADC Timing Requirements

|                    |                                                   | MIN  | NOM | MAX | UNIT          |
|--------------------|---------------------------------------------------|------|-----|-----|---------------|
| $t_{c(ADCLK)}$     | Cycle time, MibADC clock                          | 0.05 |     |     | $\mu\text{s}$ |
| $t_{d(SH)}$        | Delay time, sample and hold time                  | 1    |     |     | $\mu\text{s}$ |
| $t_d$              | Delay time, conversion time                       | 0.55 |     |     | $\mu\text{s}$ |
| $t_{d(SHC)}^{(1)}$ | Delay time, total sample/hold and conversion time | 1.55 |     |     | $\mu\text{s}$ |

(1) This is the minimum sample/hold and conversion time that can be achieved. These parameters are dependent on many factors; for more details, see the *TMS470R1x Multi-Buffered Analog-to-Digital Converter (MibADC) Reference Guide* (literature number SPNU206).


The differential nonlinearity error shown in [Figure 19](#) (sometimes referred to as differential linearity) is the difference between an actual step width and the ideal value of 1 LSB.

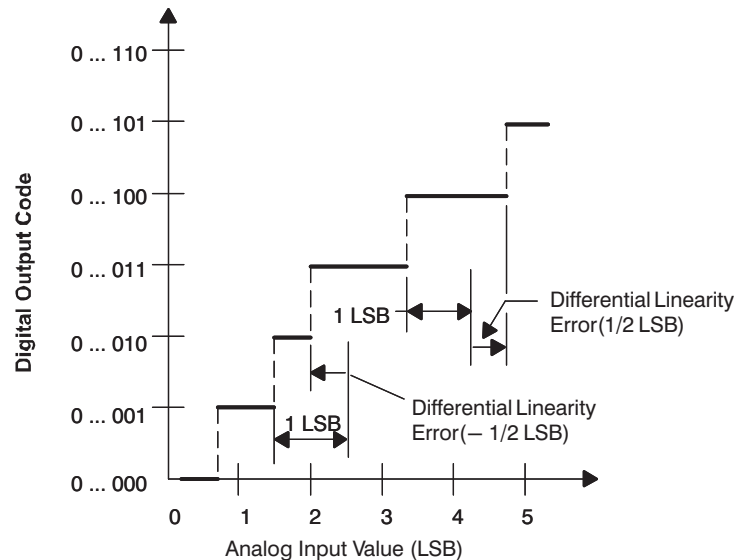

A.  $1 \text{ LSB} = (AD_{\text{REFHI}} - AD_{\text{REFLO}})/2^{10}$

**Figure 19. Differential Nonlinearity (DNL)**


The integral nonlinearity error shown in [Figure 20](#) (sometimes referred to as linearity error) is the deviation of the values on the actual transfer function from a straight line.

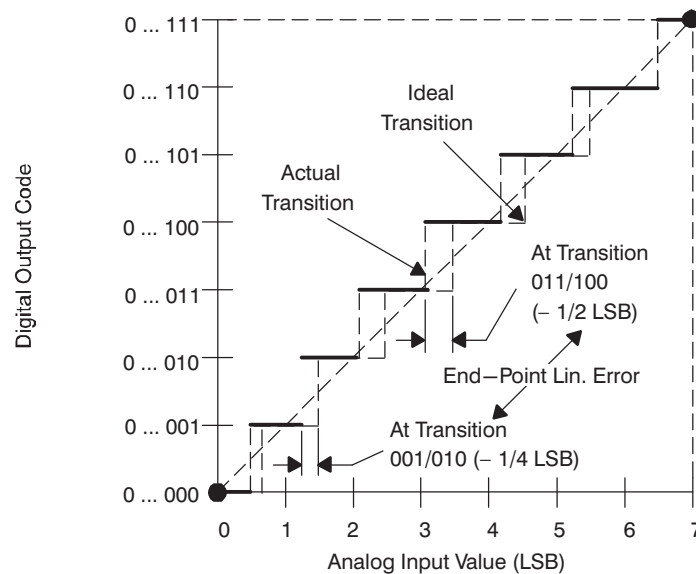

A.  $1 \text{ LSB} = (AD_{\text{REFHI}} - AD_{\text{REFLO}})/2^{10}$

**Figure 20. Integral Nonlinearity (INL) Error**

The absolute accuracy or total error of an MibADC as shown in Figure 21 is the maximum value of the difference between an analog value and the ideal midstep value.

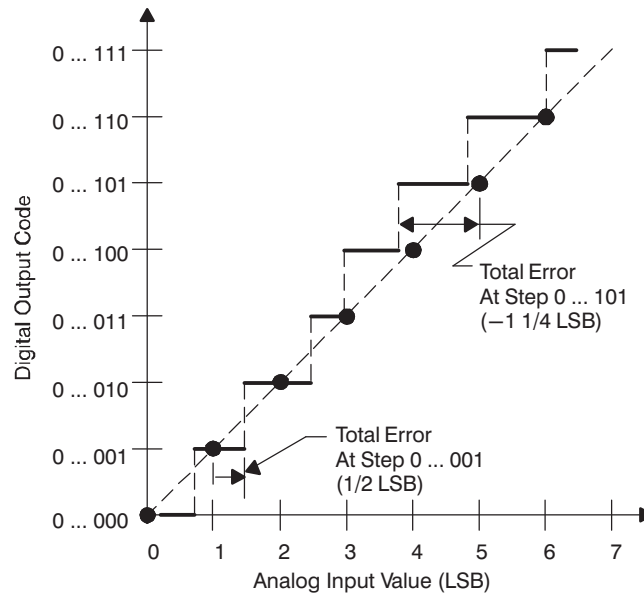

A.  $1 \text{ LSB} = (AD_{\text{REFHI}} - AD_{\text{REFLO}})/2^{10}$

**Figure 21. Absolute Accuracy (Total) Error**

## Thermal Resistance Characteristics

| PARAMETER       | °C/W |
|-----------------|------|
| $R_{\theta JA}$ | 43   |
| $R_{\theta JC}$ | 6.5  |

## Revision History

This revision history highlights the changes made to the device-specific data sheet SPNS108.

**Table 12. Revision History**

|                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SPNS108A to SPNS108B</b>                                                                                                                 |
| Corrected the device identification code register value from 0xn83F to 0xn87F in <a href="#">Device Identification Code Register</a> .      |
| <b>SPNS108 to SPNS108A</b>                                                                                                                  |
| Revised the Family Nomenclature drawing to add Q version of the temperature range.                                                          |
| Revised "Absolute Maximum Ratings" table to add Q version of the temperature range.                                                         |
| Revised "Device Recommended Operating Conditions" table to add Q version of the temperature range.                                          |
| Added note to $\overline{\text{PORRST}}$ Timing Diagram.                                                                                    |
| Changed $T_A$ range to $-40^{\circ}\text{C}$ to $125^{\circ}\text{C}$ on $t_{\text{wec}}$ in "Timing Requirements for Program Flash" table. |
| Added $t_{\text{wec}}$ MIN value of 50000 and deleted MAX value in "Timing Requirements for Program Flash" table.                           |
| Changed $t_{\text{erase(sector)}}$ TYP value to 1.7 and removed MAX value in "Timing Requirements for Program Flash" table.                 |

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|---------|
| TMS470R1B768PGET | NRND          | LQFP         | PGE                | 144  | 60             | Green (RoHS<br>& no Sb/Br) | NIPDAU                  | Level-3-260C-168 HR  |              | AB768PGET<br>TMS470     |         |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.


<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## PGE (S-PQFP-G144)

## PLASTIC QUAD FLATPACK

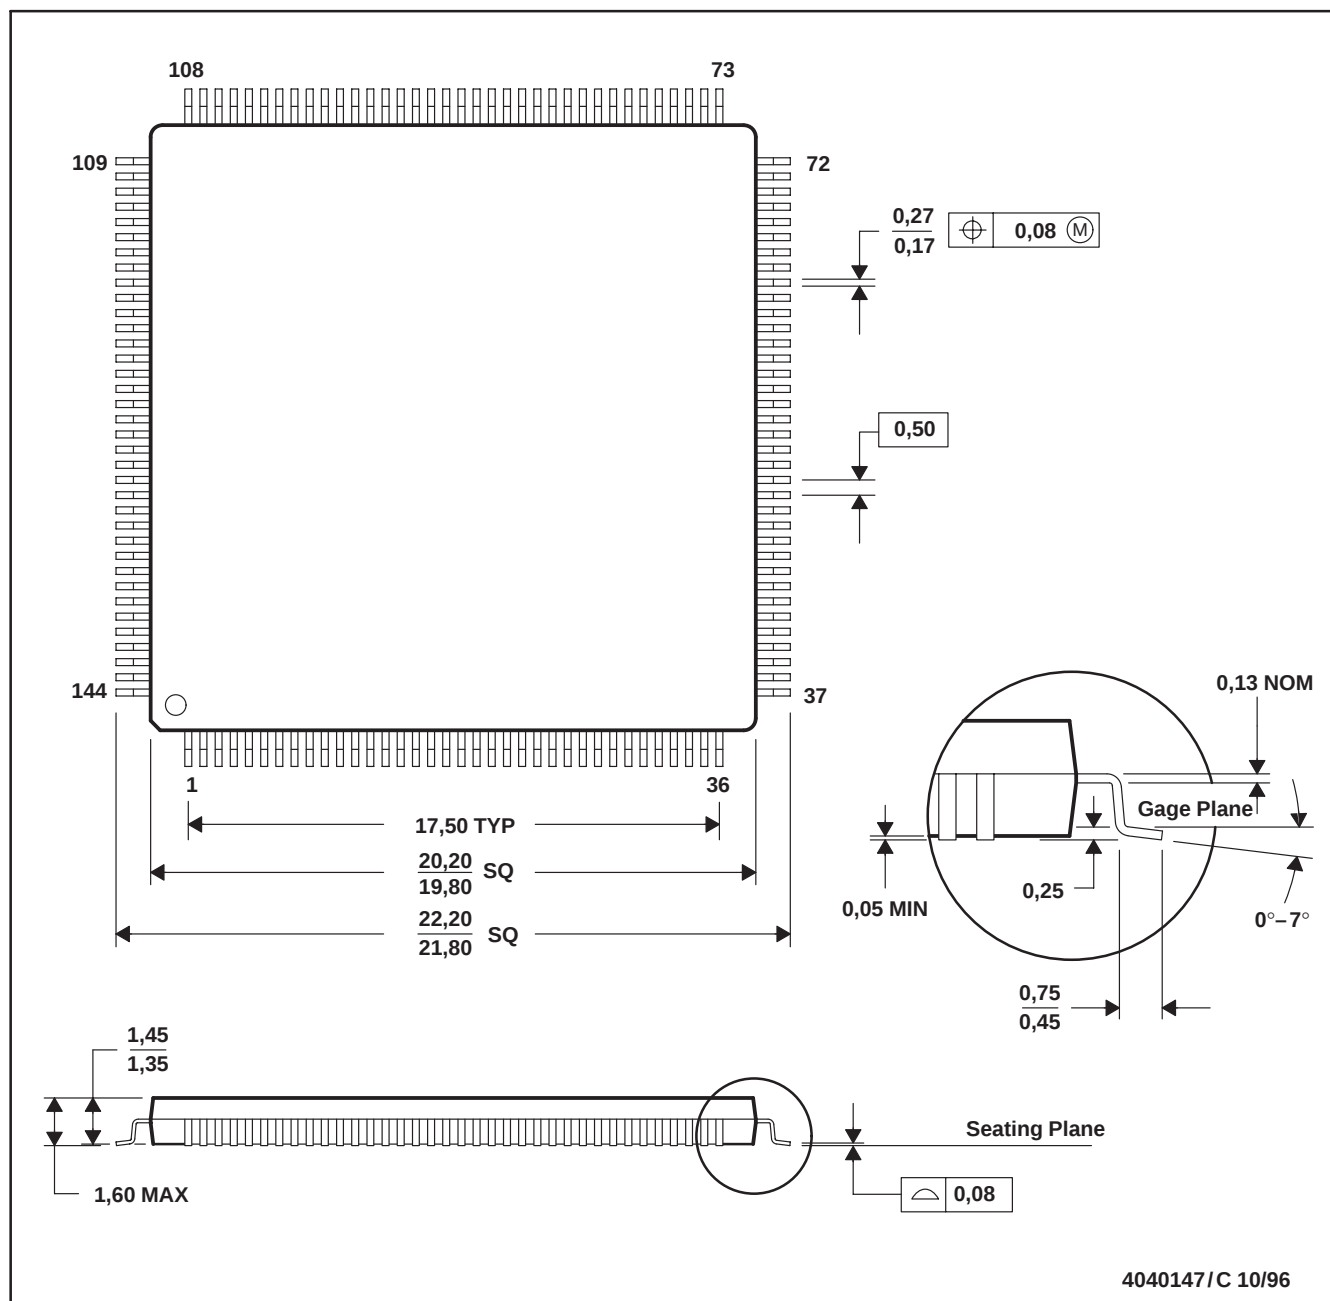

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Falls within JEDEC MS-026

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale ([www.ti.com/legal/termsofsale.html](http://www.ti.com/legal/termsofsale.html)) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2020, Texas Instruments Incorporated