



DESCRIPTION: 2W 3KVDC Isolation & Regulated Dual Output DC-DC Converters

TPI-2W series are specially designed for 3KVDC isolation & regulated dual output application, the input voltage range within $\pm 5\%$, 3KVDC isolation and regulated output with very low ripple noise.

FEATURES

| | | |
|---------------------------------------|--------------------------------|-----------------------------------|
| Small footprint | 3KVDC isolation | Regulated dual output |
| Operating temperature: -40°C to 105°C | Industry standard pinout | Internal SMD construction |
| Continuous short circuit protection | No external component Required | RoHS compliance, CE certification |

SELECTION GUIDE

| Part Number | Nominal Input Voltage | Input voltage range | Output voltage | Output current(Max) | Output current(Min) | Efficiency | Package Style |
|-------------|-----------------------|---------------------|----------------|---------------------|---------------------|------------|---------------|
| | VDC | VDC | VDC | mA | mA | %, Typ. | |
| TPI0505S-2W | 5 | 4.75-5.25 | ± 5 | ± 200 | ± 20 | 54 | SIP |
| TPI0509S-2W | 5 | 4.75-5.25 | ± 9 | ± 112 | ± 12 | 63 | SIP |
| TPI0512S-2W | 5 | 4.75-5.25 | ± 12 | ± 84 | ± 9 | 63 | SIP |
| TPI0515S-2W | 5 | 4.75-5.25 | ± 15 | ± 67 | ± 7 | 65 | SIP |
| TPI1205S-2W | 12 | 11.4-12.6 | ± 5 | ± 200 | ± 20 | 56 | SIP |
| TPI1209S-2W | 12 | 11.4-12.6 | ± 9 | ± 112 | ± 12 | 62 | SIP |
| TPI1212S-2W | 12 | 11.4-12.6 | ± 12 | ± 84 | ± 9 | 65 | SIP |
| TPI1215S-2W | 12 | 11.4-12.6 | ± 15 | ± 67 | ± 7 | 66 | SIP |
| TPI2405S-2W | 24 | 22.8-25.2 | ± 5 | ± 200 | ± 20 | 54 | SIP |
| TPI2409S-2W | 24 | 22.8-25.2 | ± 9 | ± 112 | ± 12 | 62 | SIP |
| TPI2412S-2W | 24 | 22.8-25.2 | ± 12 | ± 84 | ± 9 | 64 | SIP |
| TPI2415S-2W | 24 | 22.8-25.2 | ± 15 | ± 67 | ± 7 | 66 | SIP |

Add suffix "P" for continuous short circuit protection, for example TPI0505SP-2W.

OUTPUT SPECIFICATIONS

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|-------------------------|-----------------------------|------|------|------------|-------|
| Output power | | 0.1 | | 2 | W |
| Line regulation | For Vin change of $\pm 5\%$ | | | ± 0.25 | % |
| Load regulation | 10% to 100% full load | | | ± 1 | % |
| Output voltage accuracy | 100% full load | | | ± 3 | % |
| Temperature drift | 100% full load | | | 0.03 | %/°C |
| Output ripple | 20MHz Bandwidth | | 10 | 20 | Mvp-p |
| Output Noise | 20MHz Bandwidth | | 50 | 100 | Mvp-p |

COMMON SPECIFICATIONS

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|--------------------------|---|---------------------|------|------|---------|
| Storage humidity range | | | | 95 | % |
| Operating temperature | Derating if the temperature $\geq 85^\circ\text{C}$ | -40 | | 105 | °C |
| Storage temperature | | -55 | | 125 | °C |
| Temp. rise at full load | | | 20 | 30 | °C |
| Lead temperature | 1.5mm from case for 10 seconds | | | 300 | °C |
| Cooling | | Free air convection | | | |
| Case material | | Plastic(UL94-V0) | | | |
| Short circuit protection | | | | 1 | S |
| MTBF | | 3500 | | | K hours |
| Weight | | | 5.2 | | g |


ISOLATION CHARACTERISTICS

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|----------------------|---------------------------------|------|------|------|-------|
| Isolation voltage | Tested for 1 minute and 1mA max | 3000 | | | VDC |
| Isolation resistance | Test at 1000VDC | 1 | | | GΩ |

Note:


1. All specifications measured at TA=25° C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
2. See below recommended circuits for more details;
3. Operation under minimum load will not damage the converter; However, they may not meet all specification listed, and that will reduce the life of product.

TYPICAL CHARACTERISTICS

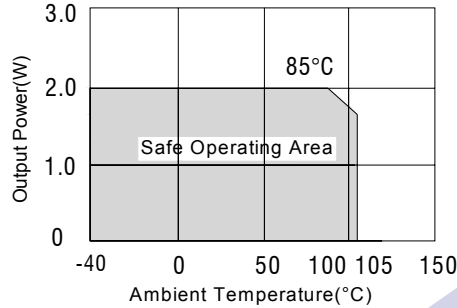

MECHANICAL DIMENSIONS

SIP Package

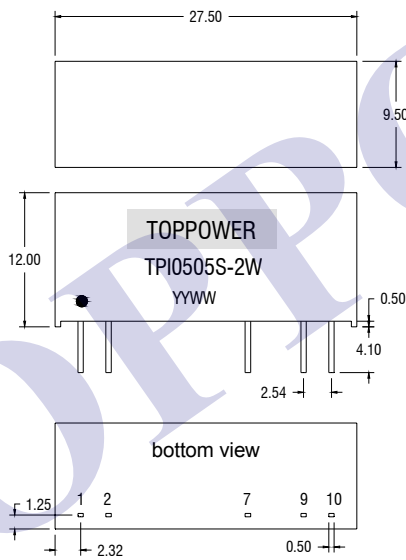


All dimensions in: mm±0.10mm
Others in ±0.25mm

PIN CONNECTIONS


| 10 PIN SIP | |
|------------|----------|
| Pin | Function |
| 1 | +Vin |
| 2 | -Vin |
| 7 | +Vout |
| 9 | -Vout |
| 10 | 0V |

RECOMMENDED FOOTPRINT DETAILS

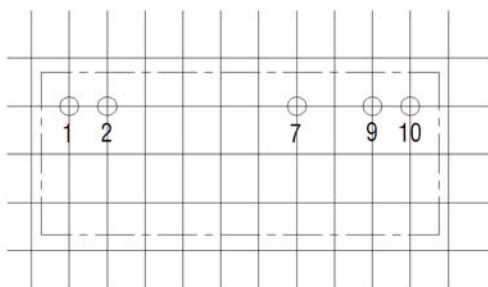

Unless otherwise stated all dimensions in mm ±0.5mm.

TUBE OUTLINE DIMENSIONS



All dimensions in mm ±0.5mm.

Tube length : 520mm Tube Quantity:15PCS


APPLICATION NOTE

1.Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load could not be less than 10% of the full load. If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load.

2.Recommended circuit

If you want to further decrease the input/output ripple, an “LC” filtering network may be connected to the input and output ends of the DC/DC converter, see(Figure 1).

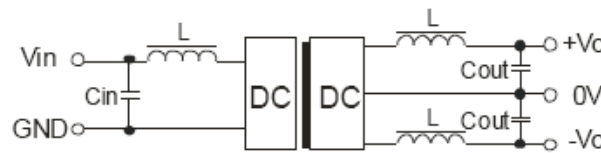

(Figure 1)

It should also be noted that the inductance and the frequency of the “LC” filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1)

EXTERNAL CAPACITOR TABLE (TABLE 1)

| Vin (VDC) | Cin (μF) | Vout (VDC) | Cout (μF) |
|-----------|----------|------------|-----------|
| 5 | 4.7 | ±5 | 4.7 |
| 12 | 2.2 | ±9 | 2.2 |
| 24 | 0.47 | ±12 | 1 |
| - | - | ±15 | 0.47 |

3.Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

4.Input Over-voltage Protection Circuit

The simplest device for input over-voltage protection is a linear voltage regulator with overheat protection that is connected to the input end in series (Figure 2).



(Figure 2)

When the environment temperature is higher than 71°C, the product output power should be less than 60% of the rated power.

No parallel connection or plug and play.

Use dual output simultaneously, forbid opening output pin (0V) to use as single output.