


## MOS Field Effect Transistor

### 2SK3483

#### ■ Features

- Super low on-state resistance:  
 $R_{DS(on)1} = 52\text{m}\Omega$  MAX. ( $V_{GS} = 10\text{V}$ ,  $I_D = 14\text{A}$ )  
 $R_{DS(on)2} = 59\text{m}\Omega$  MAX. ( $V_{GS} = 4.5\text{V}$ ,  $I_D = 14\text{A}$ )
- Low  $C_{iss}$ :  $C_{iss} = 2300\text{pF}$  TYP.

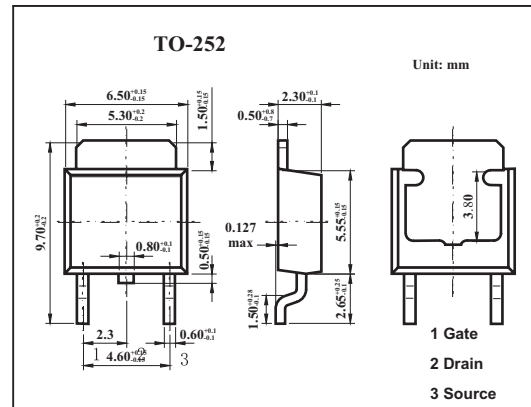

#### ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

| Parameter               | Symbol     | Rating      | Unit             |
|-------------------------|------------|-------------|------------------|
| Drain to source voltage | $V_{DS}$   | 100         | V                |
| Gate to source voltage  | $V_{GS}$   | $\pm 20$    | V                |
| Drain current           | $I_D$      | $\pm 28$    | A                |
|                         | $I_{dp}^*$ | $\pm 60$    | A                |
| Power dissipation       | $P_D$      | 40          | W                |
|                         |            | 1.0         |                  |
| Channel temperature     | $T_{ch}$   | 150         | $^\circ\text{C}$ |
| Storage temperature     | $T_{stg}$  | -55 to +150 | $^\circ\text{C}$ |

\*  $PW \leq 10\text{ }\mu\text{s}$ , Duty Cycle  $\leq 1\%$

#### ■ Electrical Characteristics $T_a = 25^\circ\text{C}$

| Parameter                           | Symbol        | Testconditions                                                          | Min | Typ  | Max      | Unit             |
|-------------------------------------|---------------|-------------------------------------------------------------------------|-----|------|----------|------------------|
| Drain cut-off current               | $I_{DSS}$     | $V_{DS}=100\text{V}, V_{GS}=0$                                          |     |      | 10       | $\mu\text{A}$    |
| Gate leakage current                | $I_{GSS}$     | $V_{GS}=\pm 20\text{V}, V_{DS}=0$                                       |     |      | $\pm 10$ | $\mu\text{A}$    |
| Gate cutoff voltage                 | $V_{GS(off)}$ | $V_{DS}=10\text{V}, I_D=1\text{mA}$                                     | 1.5 | 2.0  | 2.5      | V                |
| Forward transfer admittance         | $ Y_{fs} $    | $V_{DS}=10\text{V}, I_D=14\text{A}$                                     | 9.0 | 18   |          | S                |
| Drain to source on-state resistance | $R_{DS(on)1}$ | $V_{GS}=10\text{V}, I_D=14\text{A}$                                     |     | 41   | 52       | $\text{m}\Omega$ |
|                                     | $R_{DS(on)2}$ | $V_{GS}=4.5\text{V}, I_D=14\text{A}$                                    |     | 45   | 59       | $\text{m}\Omega$ |
| Input capacitance                   | $C_{iss}$     | $V_{DS}=10\text{V}, V_{GS}=0, f=1\text{MHz}$                            |     | 2300 |          | pF               |
| Output capacitance                  | $C_{oss}$     |                                                                         |     | 230  |          | pF               |
| Reverse transfer capacitance        | $C_{rss}$     |                                                                         |     | 120  |          | pF               |
| Turn-on delay time                  | $t_{on}$      | $I_D=14\text{A}, V_{GS(on)}=10\text{V}, R_G=0\Omega, V_{DD}=50\text{V}$ |     | 12   |          | ns               |
| Rise time                           | $t_r$         |                                                                         |     | 9    |          | ns               |
| Turn-off delay time                 | $t_{off}$     |                                                                         |     | 53   |          | ns               |
| Fall time                           | $t_f$         |                                                                         |     | 5    |          | ns               |
| Total Gate Charge                   | $Q_G$         | $I_D=28\text{A}, V_{DD}=80\text{V}, V_{GS}=10\text{V}$                  |     | 49   |          | nC               |
| Gate to Source Charge               | $Q_{GS}$      |                                                                         |     | 7    |          | nC               |
| Gate to Drain Charge                | $Q_{GD}$      |                                                                         |     | 13   |          | nC               |