

Surface Mount RF Transformer

TX1-R5+ TX1-R5

50Ω www.DataSheet4U.com 0.8 to 500 MHz




Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Pin Connections

PRIMARY DOT	4
PRIMARY	6
SECONDARY DOT	3
SECONDARY	1
NOT USED	2,5

Outline Drawing

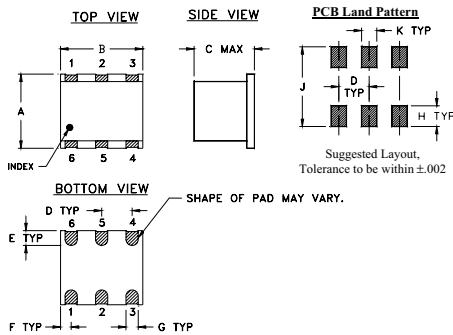

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.250	.31	.20	.100	.050	.055
6.35	7.87	5.08	2.54	1.27	1.40
G	H	J	K	wt	
.040	.070	.270	.050	grams	
1.02	1.78	6.86	1.27	0.50	

Features

- wideband, 0.8 to 500 MHz
- excellent return loss

Applications

- VHF/UHF
- receivers/transmitters

CASE STYLE: TT240
PRICE: \$3.75 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Transformer Electrical Specifications


Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
1	0.8-500	0.8-500	1.2-350	3.2-180

* Insertion Loss is referenced to mid-band loss, 0.7 dB typ.

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
0.80	0.87	11.84
1.20	0.87	13.26
2.20	0.87	15.37
3.20	0.86	16.68
91.60	0.74	14.38
180.00	0.92	10.21
265.00	1.32	7.79
350.00	1.28	6.22
425.00	1.87	5.32
500.00	2.01	4.63

Config. C



Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

www.DataSheet4U.com

REV. A
M98898
TX1-R5
070515

RF/IF MICROWAVE COMPONENTS