



## Features

- Low power consumption
- Low temperature coefficient
- Built-in hysteresis characteristic
- High input voltage (up to 15V)
- Output voltage accuracy: tolerance  $\pm 2\%$
- TO92, SOT89 SOT23-3 and SOT23 package

## Applications

- Battery checkers
- Level selectors
- Power failure detectors
- Microcomputer reset
- Battery memory backup
- Non-volatile RAM signal storage protectors

## General Description

The TX70XXH series devices are a set of three terminal low power voltage detectors implemented in CMOS technology. Each voltage detector in the series detects a particular fixed voltage ranging from 2.2V to 7.0V. The voltage detectors consist of a high-precision and low power consumption standard voltage source as well as a comparator,

hysteresis circuit, and an output driver. CMOS technology ensures low power consumption.

Although designed primarily as fixed voltage detectors, these devices can be used with external components to detect user specified threshold voltages.

## Selection Table

| Part No.   | Detectable Voltage | Hysteresis Width | Tolerance | Package       | Marking                                 |
|------------|--------------------|------------------|-----------|---------------|-----------------------------------------|
| TX7022HYxx | 2.2V               | 0.11V            | $\pm 2\%$ | TO92<br>SOT89 | 70XXA-1(for TO92)<br>70XXA-1(for SOT89) |
| TX7024HYxx | 2.4V               | 0.12V            | $\pm 2\%$ |               |                                         |
| TX7027HYxx | 2.7V               | 0.135V           | $\pm 2\%$ |               |                                         |
| TX7030HYxx | 3.0V               | 0.15V            | $\pm 2\%$ |               |                                         |
| TX7033HYxx | 3.3V               | 0.165V           | $\pm 2\%$ |               |                                         |
| TX7036HYxx | 3.6V               | 0.18V            | $\pm 2\%$ |               |                                         |
| TX7039HYxx | 3.9V               | 0.195V           | $\pm 2\%$ |               |                                         |
| TX7040HYxx | 4.0V               | 0.2V             | $\pm 2\%$ |               |                                         |
| TX7044HYxx | 4.4V               | 0.22V            | $\pm 2\%$ |               |                                         |
| TX7050HYxx | 5.0V               | 0.25V            | $\pm 2\%$ |               |                                         |
| TX7070HYxx | 7.0V               | 0.35V            | $\pm 2\%$ |               |                                         |




## Order Information

TX70①②③④⑤⑥


| Designator | Symbol  | Description              |
|------------|---------|--------------------------|
| ① ②        | Integer | Output Voltage(2.2~7.0V) |
| ③          | H       | Standard                 |
| ④          | Y       | N NMOS                   |
|            |         | C CMOS                   |
| ⑤          | T       | Package:TO-92            |
|            | P       | Package:SOT89            |
|            | M       | Package:SOT23-3          |
|            | N       | Package:SOT23            |
| ⑥          | R       | RoHS / Pb Free           |
|            | G       | Halogen Free             |

## Block Diagram

(1) CMOS Output

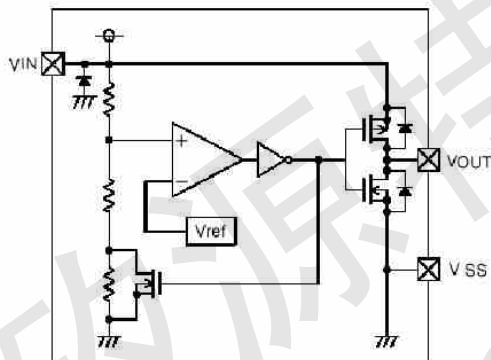


(2) N-ch Open Drain Output

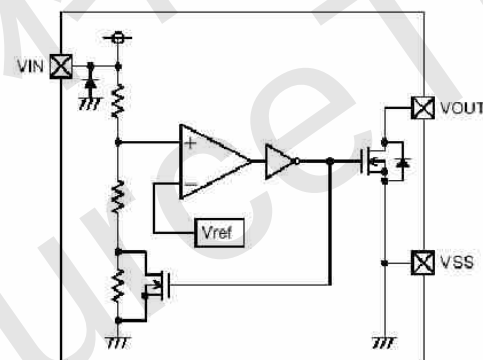

## Output Table & Curve



| $V_{DD}$  | $V_{DD} > V_{DET}(+)$ | $V_{DD} \leq V_{DET}(-)$ |
|-----------|-----------------------|--------------------------|
| $V_{OUT}$ | Hi-Z                  | $V_{SS}$                 |

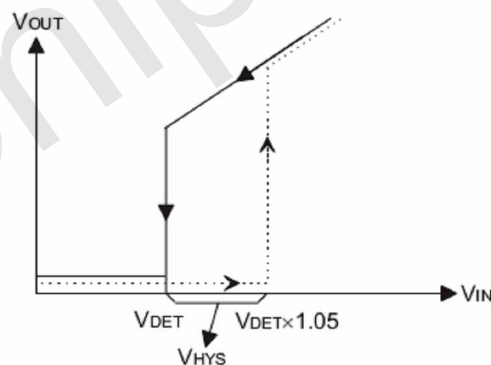

Dash line ...  $V_{IN}$  from Lo  $\rightarrow$  Hi  
Solid line ...  $V_{IN}$  from Hi  $\rightarrow$  Lo



## Marking Rule

SOT23-3  
(TOP VIEW)SOT-23  
(TOP VIEW)① Represents integer of detect voltage and  
CMOS Output

| MARK | CONFIGURATIONG | VOLTAGE(V) |
|------|----------------|------------|
| A    | CMOS           | 0.X        |
| B    | CMOS           | 1.X        |
| C    | CMOS           | 2.X        |
| D    | CMOS           | 3.X        |
| E    | CMOS           | 4.X        |
| F    | CMOS           | 5.X        |
| H    | CMOS           | 6.X        |

## N-Channel Open Drain Output

| MARK | CONFIGURATIONG | VOLTAGE(V) |
|------|----------------|------------|
| K    | N-ch           | 0.X        |
| L    | N-ch           | 1.X        |
| M    | N-ch           | 2.X        |
| N    | N-ch           | 3.X        |
| P    | N-ch           | 4.X        |
| R    | N-ch           | 5.X        |
| S    | N-ch           | 6.X        |

## ② Represents decimal number of detect voltage

| MARK | VOLTAGE(V) | MARK | VOLTAGE(V) |
|------|------------|------|------------|
| 0    | X.0        | 5    | X.5        |
| 1    | X.1        | 6    | X.6        |
| 2    | X.2        | 7    | X.7        |
| 3    | X.3        | 8    | X.8        |
| 4    | X.4        | 9    | X.9        |

## ③ Represents accuracy

| MARK | ACCURACY |
|------|----------|
| 3    | 2%       |
| 1    | 1%       |


## ④ Represent production lot number

Y





## Pin Assignment

TO92 (Front view)



SOT89 (Top view)

SOT23-3 and SOT23  
(Top view)

## Absolute Maximum Ratings

Supply Voltage .....-0.3V to 16V

Storage Temperature .....-50°C to 125°C

Operating Temperature .....-40°C to 85°C

Note: These are stress ratings only. Stresses exceeding the range specified under “Absolute Maximum Ratings” may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

## Thermal Information

| Symbol        | Parameter                                                                          | Package | Max. | Unit |
|---------------|------------------------------------------------------------------------------------|---------|------|------|
| $\theta_{JA}$ | Thermal Resistance (Junction to Ambient) (Assume no ambient airflow, no heat sink) | SOT23   | 500  | °C/W |
|               |                                                                                    | SOT89   | 200  | °C/W |
|               |                                                                                    | TO92    | 200  | °C/W |
| $P_D$         | Power Dissipation                                                                  | SOT23   | 0.20 | W    |
|               |                                                                                    | SOT89   | 0.50 | W    |
|               |                                                                                    | TO92    | 0.50 | W    |

Note:  $P_D$  is measured at  $T_a = 25^\circ\text{C}$



## Electrical Characteristics

TX7022HYxx

Ta=25

°C

| Symbol                | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-----------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                       |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>      | Detection Voltage       | -               | -                      | 2.156                    | 2.200                    | 2.244                   | V     |
| V <sub>HYS</sub>      | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>       | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μA    |
| V <sub>DD</sub>       | Operating Voltage       | -               | -                      | 1.5                      | -                        | 15                      | V     |
| I <sub>OL</sub>       | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 0.5                      | 1                        | -                       | mA    |
| $\frac{V_{DET}}{T_a}$ | Temperature Coefficient | -               | 0°C<Ta<70°C            | -                        | ±0.9                     | -                       | mV/°C |

TX7024HYxx

Ta=25

°C

| Symbol                | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-----------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                       |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>      | Detection Voltage       | -               | -                      | 2.352                    | 2.400                    | 2.448                   | V     |
| V <sub>HYS</sub>      | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>       | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μA    |
| V <sub>DD</sub>       | Operating Voltage       | -               | -                      | 1.5                      | -                        | 15                      | V     |
| I <sub>OL</sub>       | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 0.5                      | 1                        | -                       | mA    |
| $\frac{V_{DET}}{T_a}$ | Temperature Coefficient | -               | 0°C<Ta<70°C            | -                        | ±0.9                     | -                       | mV/°C |

TX7027HYxx

Ta=25

°C

| Symbol                | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-----------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                       |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>      | Detection Voltage       | -               | -                      | 2.646                    | 2.700                    | 2.754                   | V     |
| V <sub>HYS</sub>      | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>       | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μA    |
| V <sub>DD</sub>       | Operating Voltage       | -               | -                      | 1.5                      | -                        | 15                      | V     |
| I <sub>OL</sub>       | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 0.5                      | 1                        | -                       | mA    |
| $\frac{V_{DET}}{T_a}$ | Temperature Coefficient | -               | 0°C<Ta<70°C            | -                        | ±0.9                     | -                       | mV/°C |

TX7030HYxx

Ta=25

°C

| Symbol | Parameter | Test Conditions |            | Min. | Typ. | Max. | Unit |
|--------|-----------|-----------------|------------|------|------|------|------|
|        |           | V <sub>DD</sub> | Conditions |      |      |      |      |



**TX70XXH series**

**Low Power Voltage Detector**

|                       |                         |    |                                  |                   |                   |                  |                 |
|-----------------------|-------------------------|----|----------------------------------|-------------------|-------------------|------------------|-----------------|
| $V_{DET}$             | Detection Voltage       | -  | -                                | 2.940             | 3.000             | 3.060            | V               |
| $V_{HYS}$             | Hysteresis Width        | -  | -                                | 0.02<br>$V_{DET}$ | 0.05<br>$V_{DET}$ | 0.1<br>$V_{DET}$ | V               |
| $I_{DD}$              | Operating Current       | 8V | No Load                          | -                 | 2                 | 3                | $\mu A$         |
| $V_{DD}$              | Operating Voltage       | -  | -                                | 1.5               | -                 | 15               | V               |
| $I_{OL}$              | Output Sink Current     | 2V | $V_{OUT}=0.2V$                   | 1.2               | 2.5               | -                | mA              |
| $\frac{V_{DET}}{T_a}$ | Temperature Coefficient | -  | $0^{\circ}C < T_a < 70^{\circ}C$ | -                 | $\pm 0.9$         | -                | mV/ $^{\circ}C$ |

**TX7033HYxx**

**Ta=25**

**$^{\circ}C$**

| Symbol                | Parameter               | Test Conditions |                                  | Min.              | Typ.              | Max.             | Unit            |
|-----------------------|-------------------------|-----------------|----------------------------------|-------------------|-------------------|------------------|-----------------|
|                       |                         | $V_{DD}$        | Conditions                       |                   |                   |                  |                 |
| $V_{DET}$             | Detection Voltage       | -               | -                                | 3.234             | 3.300             | 3.366            | V               |
| $V_{HYS}$             | Hysteresis Width        | -               | -                                | 0.02<br>$V_{DET}$ | 0.05<br>$V_{DET}$ | 0.1<br>$V_{DET}$ | V               |
| $I_{DD}$              | Operating Current       | 8V              | No Load                          | -                 | 2                 | 3                | $\mu A$         |
| $V_{DD}$              | Operating Voltage       | -               | -                                | 1.5               | -                 | 15               | V               |
| $I_{OL}$              | Output Sink Current     | 2V              | $V_{OUT}=0.2V$                   | 1.2               | 2.5               | -                | mA              |
| $\frac{V_{DET}}{T_a}$ | Temperature Coefficient | -               | $0^{\circ}C < T_a < 70^{\circ}C$ | -                 | $\pm 0.9$         | -                | mV/ $^{\circ}C$ |

**TX7036HYxx**

**Ta=25**

**$^{\circ}C$**

| Symbol                | Parameter               | Test Conditions |                                  | Min.              | Typ.              | Max.             | Unit            |
|-----------------------|-------------------------|-----------------|----------------------------------|-------------------|-------------------|------------------|-----------------|
|                       |                         | $V_{DD}$        | Conditions                       |                   |                   |                  |                 |
| $V_{DET}$             | Detection Voltage       | -               | -                                | 3.528             | 3.600             | 3.672            | V               |
| $V_{HYS}$             | Hysteresis Width        | -               | -                                | 0.02<br>$V_{DET}$ | 0.05<br>$V_{DET}$ | 0.1<br>$V_{DET}$ | V               |
| $I_{DD}$              | Operating Current       | 8V              | No Load                          | -                 | 2                 | 3                | $\mu A$         |
| $V_{DD}$              | Operating Voltage       | -               | -                                | 1.5               | -                 | 15               | V               |
| $I_{OL}$              | Output Sink Current     | 2V              | $V_{OUT}=0.2V$                   | 1.2               | 2.5               | -                | mA              |
| $\frac{V_{DET}}{T_a}$ | Temperature Coefficient | -               | $0^{\circ}C < T_a < 70^{\circ}C$ | -                 | $\pm 0.9$         | -                | mV/ $^{\circ}C$ |



TX7039HYxx

Ta=25

°C

| Symbol                | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-----------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                       |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>      | Detection Voltage       | -               | -                      | 3.822                    | 3.900                    | 3.978                   | V     |
| V <sub>HYS</sub>      | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>       | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μ A   |
| V <sub>DD</sub>       | Operating Voltage       | -               | -                      | 1.5                      | -                        | 15                      | V     |
| I <sub>OL</sub>       | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 1.2                      | 2.5                      | -                       | mA    |
| $\frac{V_{DET}}{T_a}$ | Temperature Coefficient | -               | 0°C<Ta<70°C            | -                        | ±0.9                     | -                       | mV/°C |

TX7040HYxx

Ta=25

°C

| Symbol                | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-----------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                       |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>      | Detection Voltage       | -               | -                      | 3.920                    | 4.000                    | 4.080                   | V     |
| V <sub>HYS</sub>      | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>       | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μ A   |
| V <sub>DD</sub>       | Operating Voltage       | -               | -                      | 1.5                      | -                        | 15                      | V     |
| I <sub>OL</sub>       | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 1.2                      | 2.5                      | -                       | mA    |
| $\frac{V_{DET}}{T_a}$ | Temperature Coefficient | -               | 0°C<Ta<70°C            | -                        | ±0.9                     | -                       | mV/°C |

TX7044HYxx

Ta=25

°C

| Symbol                | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-----------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                       |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>      | Detection Voltage       | -               | -                      | 4.312                    | 4.400                    | 4.488                   | V     |
| V <sub>HYS</sub>      | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>       | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μ A   |
| V <sub>DD</sub>       | Operating Voltage       | -               | -                      | 1.5                      | -                        | 15                      | V     |
| I <sub>OL</sub>       | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 3                        | 6                        | -                       | mA    |
| $\frac{V_{DET}}{T_a}$ | Temperature Coefficient | -               | 0°C<Ta<70°C            | -                        | ±0.9                     | -                       | mV/°C |





## TX7050HYxx

Ta=25

°C

| Symbol                | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-----------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                       |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>      | Detection Voltage       | -               | -                      | 4.900                    | 5.000                    | 5.100                   | V     |
| V <sub>HYS</sub>      | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>       | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μ A   |
| V <sub>DD</sub>       | Operating Voltage       | -               | -                      | 1.5                      | -                        | 15                      | V     |
| I <sub>OL</sub>       | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 3                        | 6                        | -                       | mA    |
| $\frac{V_{DET}}{T_a}$ | Temperature Coefficient | -               | 0°C<Ta<70°C            | -                        | ±0.9                     | -                       | mV/°C |

## TX7070HYxx

Ta=25

°C


| Symbol                | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-----------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                       |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>      | Detection Voltage       | -               | -                      | 6.860                    | 7.000                    | 7.140                   | V     |
| V <sub>HYS</sub>      | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>       | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μ A   |
| V <sub>DD</sub>       | Operating Voltage       | -               | -                      | 1.5                      | -                        | 15                      | V     |
| I <sub>OL</sub>       | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 3                        | 6                        | -                       | mA    |
| $\frac{V_{DET}}{T_a}$ | Temperature Coefficient | -               | 0°C<Ta<70°C            | -                        | ±0.9                     | -                       | mV/°C |






## Typical Performance Characteristics

### (1) Output Voltage vs Input voltage

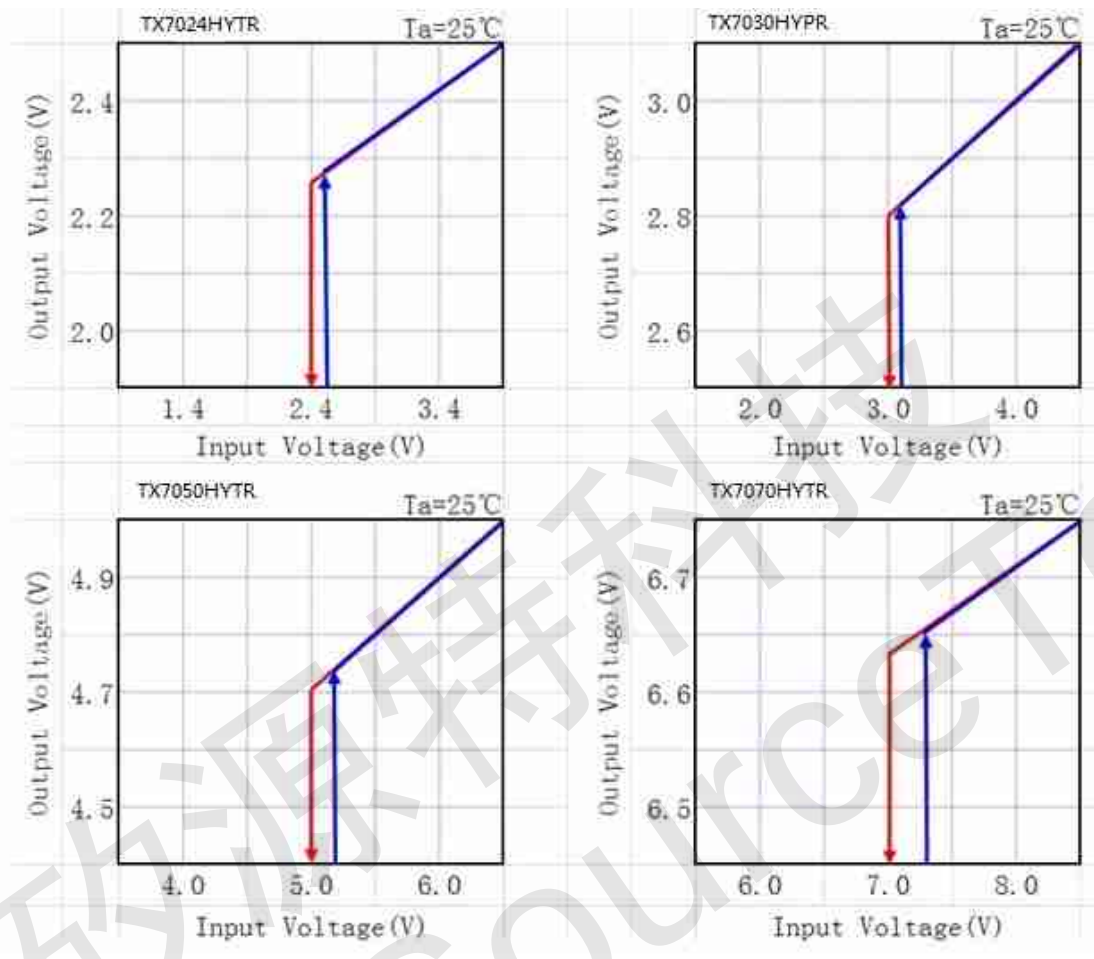


### (2) Supply Current vs. Input Voltage

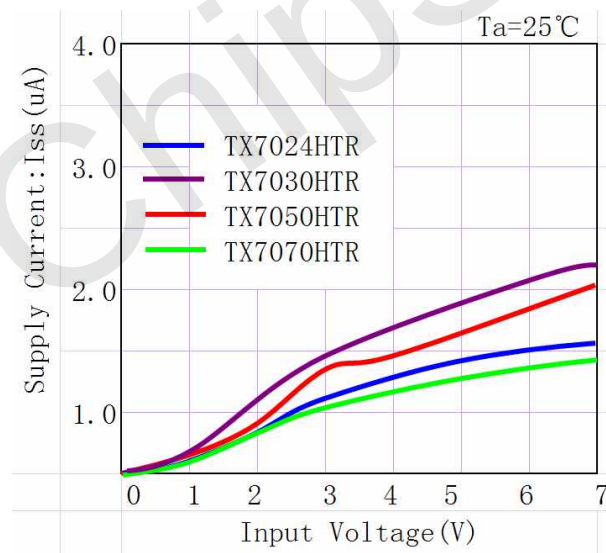



## (3) Detect, Release Voltage vs. Ambient Temperature

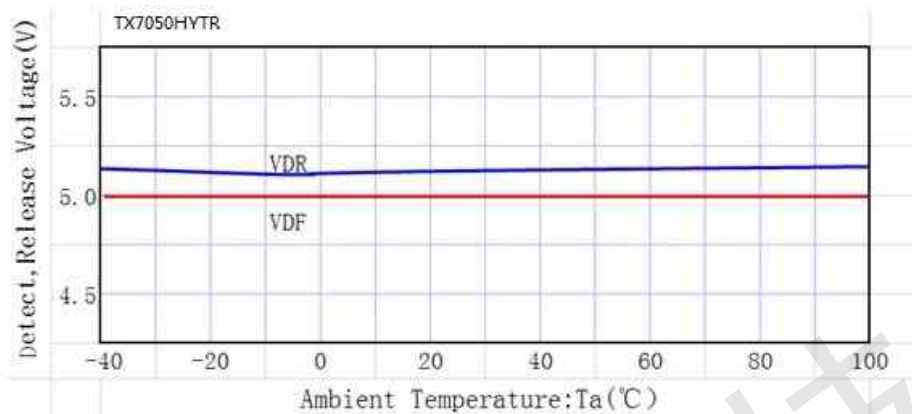


## Application Circuits


### Microcomputer Reset Circuit

Normally a reset circuit is required to protect the microcomputer system from malfunctions due to power line interruptions. The following examples show how different output Configurations perform a reset function in various systems.

NMOS open drain output application for separate power supply


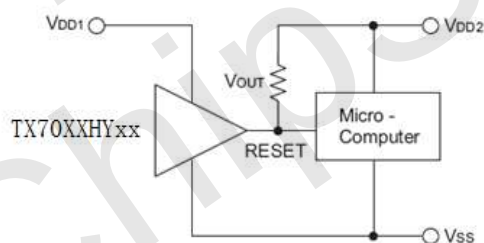




NMOS open drain output application with R-C delay

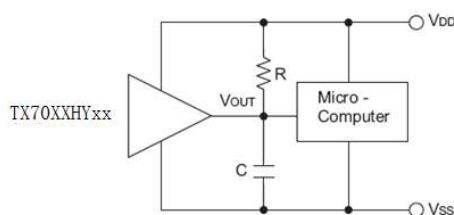

### Power-on Reset Circuit

With several external components, the NMOS open drain type of the TX70XXH series can be used to perform a power-on reset function as shown:

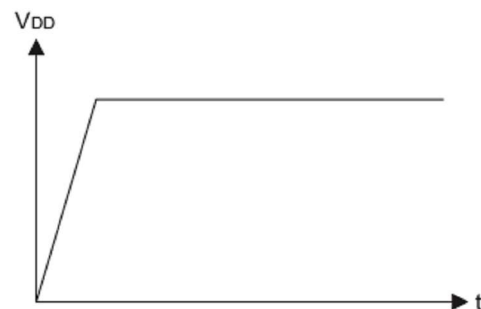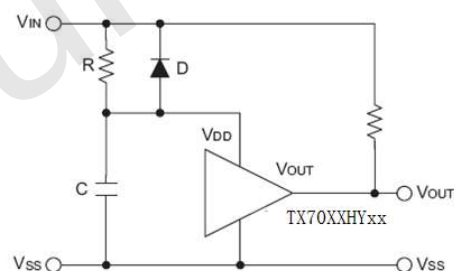


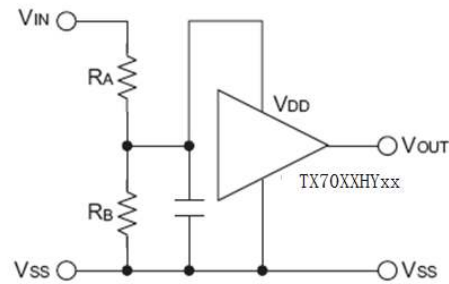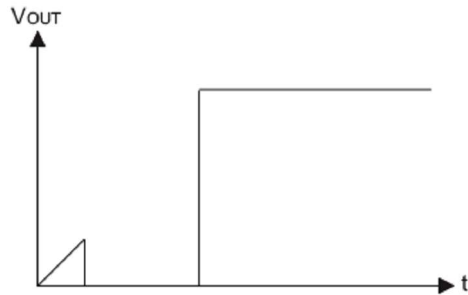


## 5V Power Line Monitoring Circuit

Generally, a minimum operating voltage of 4.5V is guaranteed in a 5V power line system. The TX7044HYTR is recommended for use as 5V power line monitoring circuit.

5V power line monitor with power-on reset

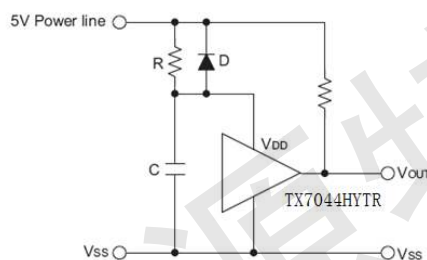

With 5V voltage regulator

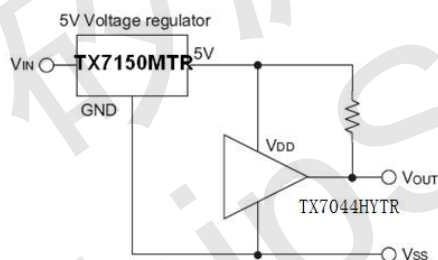


## Change of Detectable Voltage

If the required voltage is not found in the standard product selection table, it is possible to change it by using external resistance dividers or diodes. Varying the detectable voltage with a resistance divider

$$\text{Detectable voltage} = \frac{R_A + R_B}{R_B} \times V_{DET}$$

$$\text{Hysteresis width} = \frac{R_A + R_B}{R_B} \times V_{HYS}$$


Varying the detectable voltage with a diode

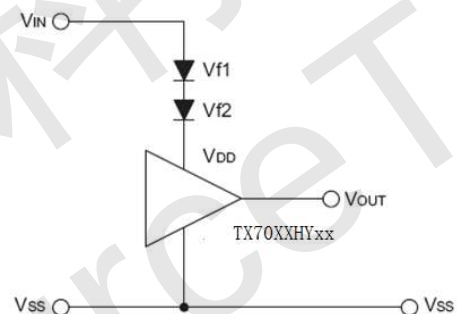

$$\text{Detectable Voltage} = V_{f1} + V_{f2} + V_{DET}$$

## Malfunction Analysis

The following circuit demonstrates the way a circuit analyzes malfunctions by monitoring the variation or spike noise of power supply voltage.

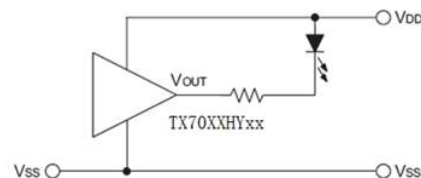


## Charge Monitoring Circuit

The following circuit shows a charged monitor for protection against battery deterioration by overcharging. When the voltage of the battery is higher than the set detectable voltage, the transistor turns onto bypass the charge





current, protecting the battery from overcharging.

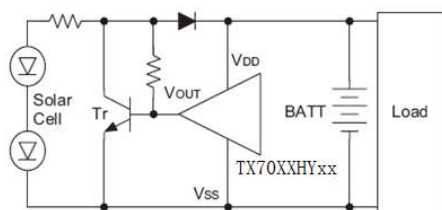

### Level Selector


The following diagram illustrates a logic level selector.

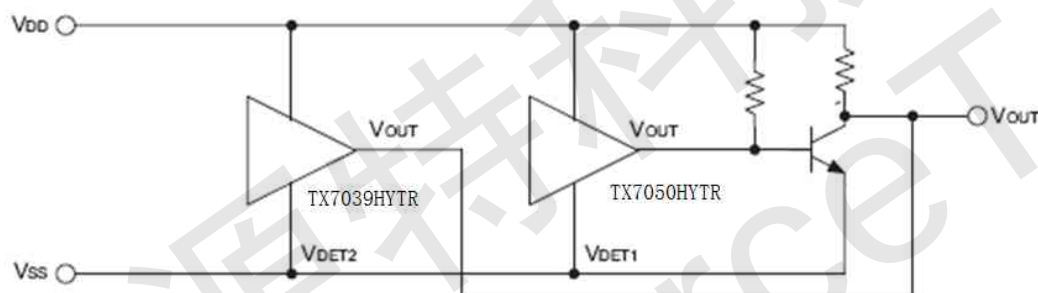

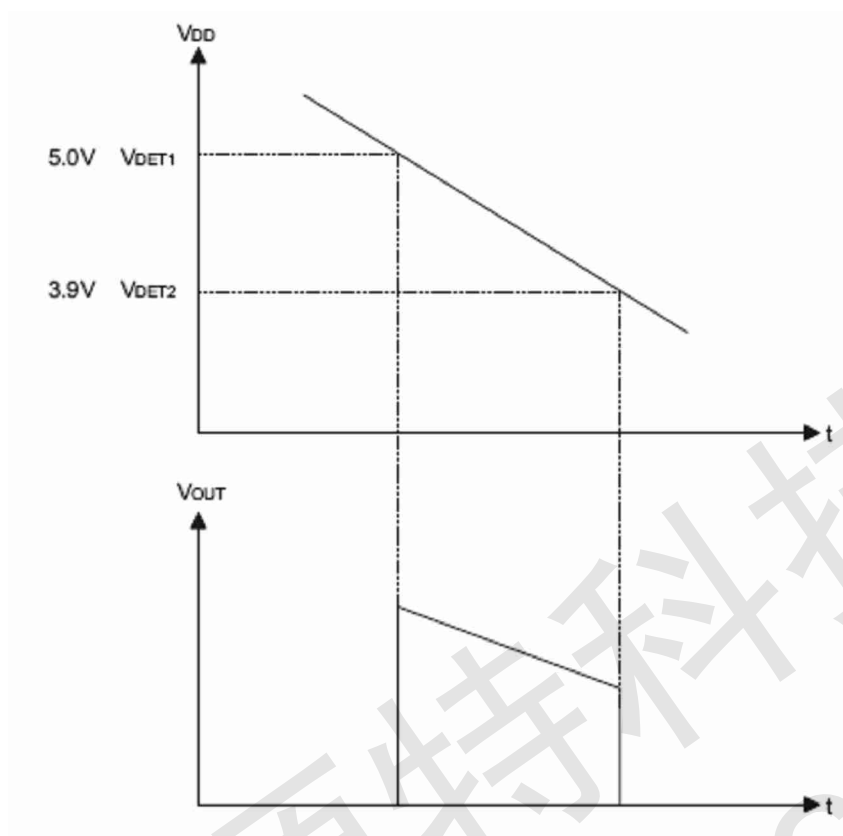

#### Package Information

#### 3-pin TO92 Outline Dimensions

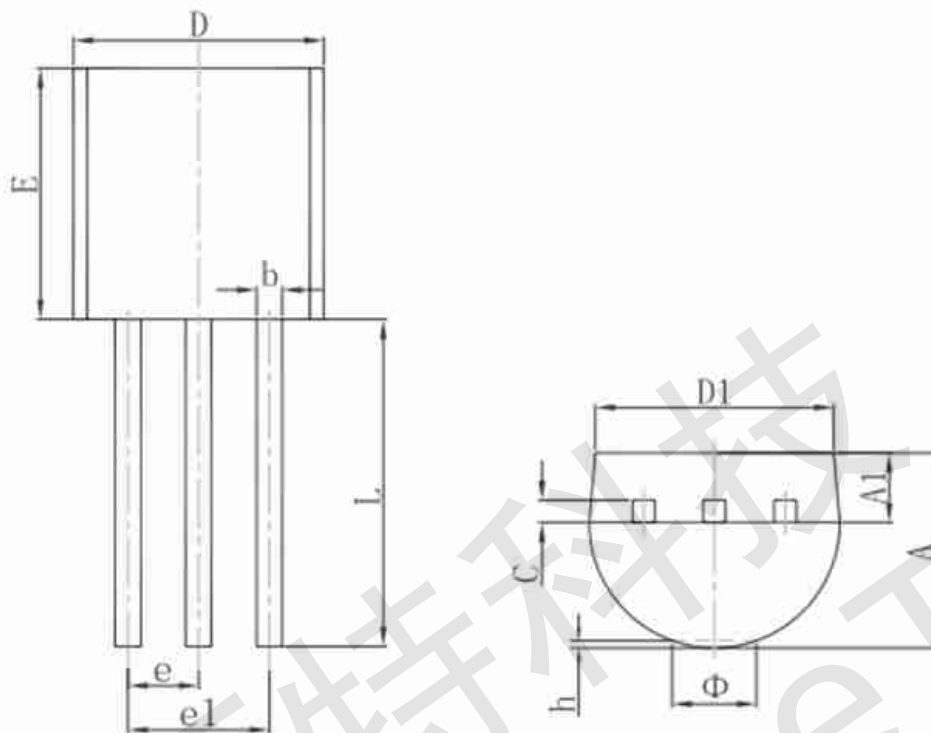


| Symbol | Dimensions In Millimeters |        | Dimensions In Inches |       |
|--------|---------------------------|--------|----------------------|-------|
|        | Min.                      | Max.   | Min.                 | Max.  |
| A      | 3.300                     | 3.700  | 0.130                | 0.146 |
| A1     | 1.100                     | 1.400  | 0.043                | 0.055 |
| b      | 0.380                     | 0.550  | 0.015                | 0.022 |
| c      | 0.360                     | 0.510  | 0.014                | 0.020 |
| D      | 4.300                     | 4.700  | 0.169                | 0.185 |
| D1     | 3.430                     |        | 0.135                |       |
| E      | 4.300                     | 4.700  | 0.169                | 0.185 |
| e      | 1.270 TYP.                |        | 0.050 TYP.           |       |
| e1     | 2.440                     | 2.640  | 0.096                | 0.104 |
| L      | 14.100                    | 14.500 | 0.555                | 0.571 |
| Φ      |                           | 1.600  |                      | 0.063 |
| h      | 0.000                     | 0.380  | 0.000                | 0.015 |






### 3-pin SOT89 Outline Dimensions

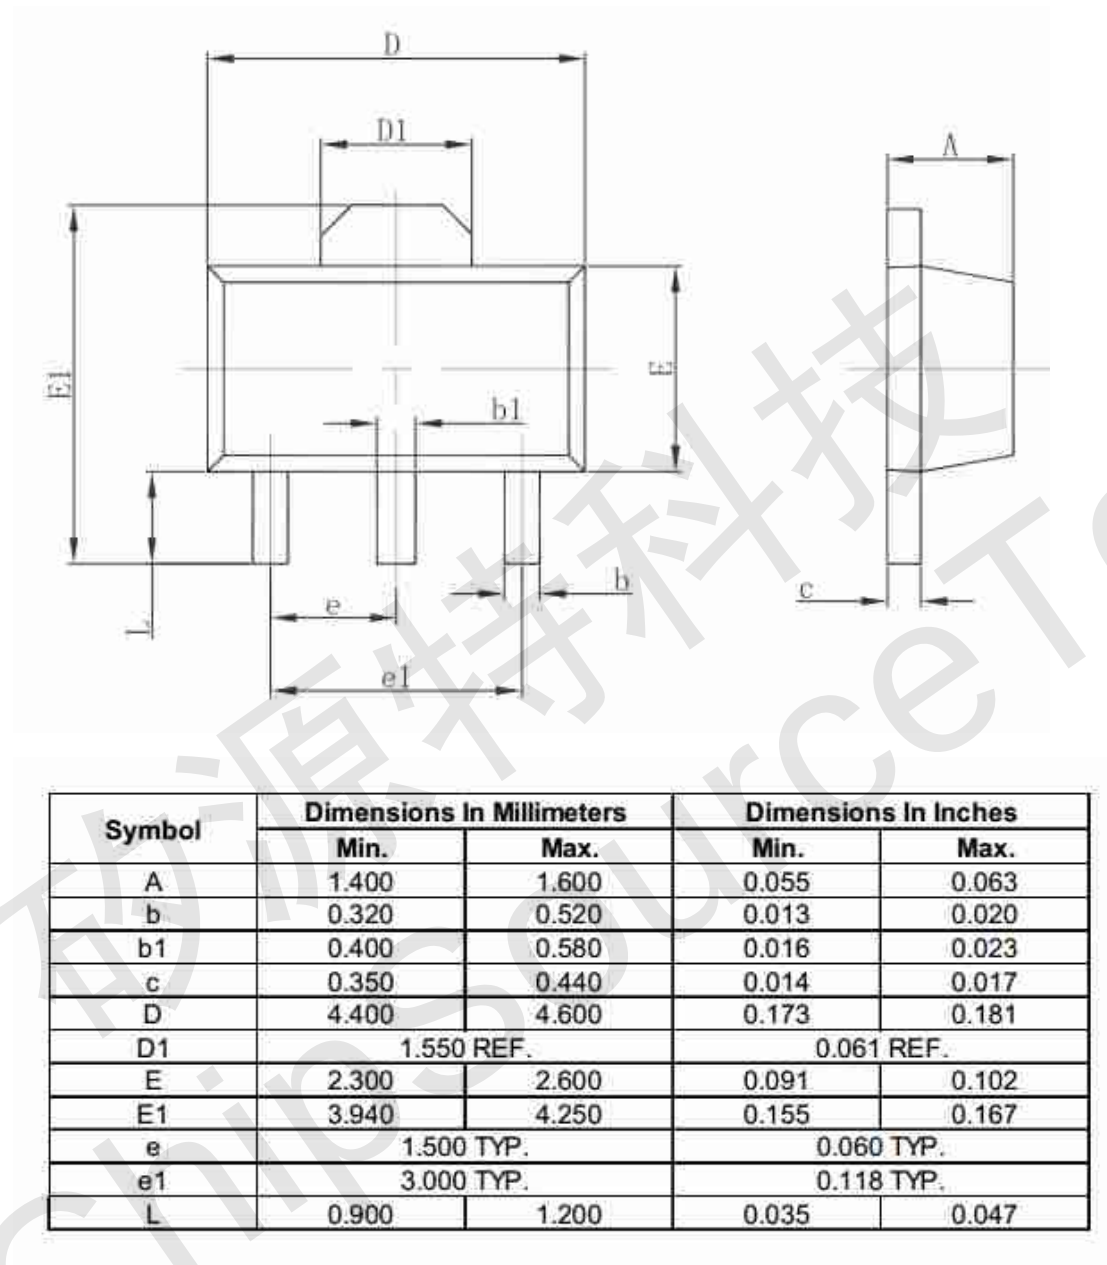





### 3-pin SOT23-3 Outline Dimensions

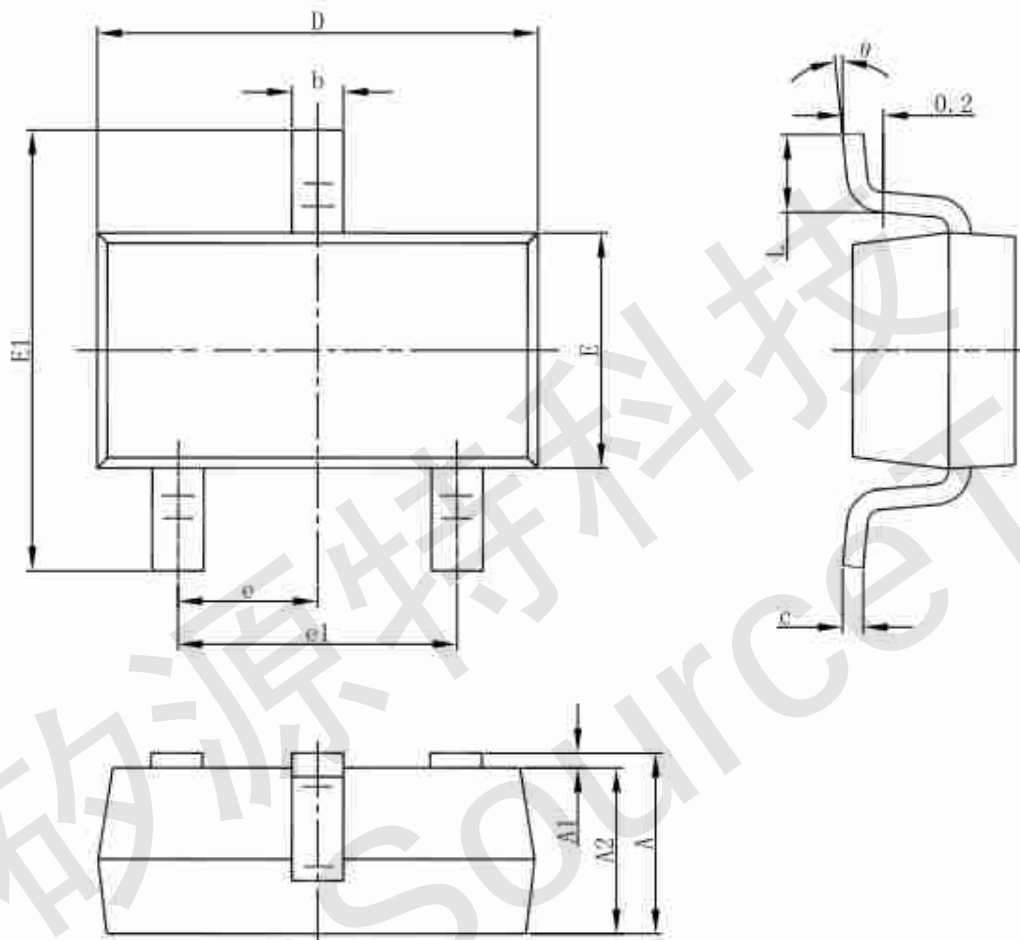

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 1.050                     | 1.250 | 0.041                | 0.049 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2     | 1.050                     | 1.150 | 0.041                | 0.045 |
| b      | 0.300                     | 0.500 | 0.012                | 0.020 |
| c      | 0.100                     | 0.200 | 0.004                | 0.008 |
| D      | 2.820                     | 3.020 | 0.111                | 0.119 |
| E      | 1.500                     | 1.700 | 0.059                | 0.067 |
| E1     | 2.650                     | 2.950 | 0.104                | 0.116 |
| e      | 0.950(BSC)                |       | 0.037(BSC)           |       |
| e1     | 1.800                     | 2.000 | 0.071                | 0.079 |
| L      | 0.300                     | 0.600 | 0.012                | 0.024 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |