

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

The logo for Renesas, featuring the word "RENESAS" in a bold, sans-serif font. The letter "R" is stylized with a square cutout at its top-left corner.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

3.3 V, SILICON GERMANIUM MMIC WIDE BAND AMPLIFIER

DESCRIPTION

The μPC3242TB is a silicon germanium monolithic integrated circuit designed as IF amplifier for DBS LNB. This device exhibits low noise figure and high power gain characteristics. This IC is manufactured using our UHSK3 (Ultra High Speed Process) silicon germanium bipolar process.

FEATURES

- Low current : $I_{CC} = 4.3 \text{ mA TYP.}$
- Power gain : $G_P = 22 \text{ dB TYP. @ } f = 1.0 \text{ GHz}$
: $G_P = 22 \text{ dB TYP. @ } f = 2.2 \text{ GHz}$
- Gain flatness : $\Delta G_P = 0.4 \text{ dB TYP. @ } f = 1.0 \text{ to } 2.2 \text{ GHz}$
- Noise figure : $NF = 4.0 \text{ dB TYP. @ } f = 1.0 \text{ GHz}$
: $NF = 4.0 \text{ dB TYP. @ } f = 2.2 \text{ GHz}$
- High linearity : $P_{O(1 \text{ dB})} = -7.5 \text{ dBm TYP. @ } f = 1.0 \text{ GHz}$
: $P_{O(1 \text{ dB})} = -9.5 \text{ dBm TYP. @ } f = 2.2 \text{ GHz}$
- Supply voltage : $V_{CC} = +3.0 \text{ to } +3.6 \text{ V}$
- Port impedance : input/output 50Ω

APPLICATIONS

- IF amplifiers in DBS LNB, other L-band amplifiers, etc.

ORDERING INFORMATION


Part Number	Order Number	Package	Marking	Supplying Form
μPC3242TB-E3	μPC3242TB-E3-A	6-pin super minimold (Pb-Free)	C3Z	<ul style="list-style-type: none"> • Embossed tape 8 mm wide • Pin 1, 2, 3 face the perforation side of the tape • Qty 3 kpcs/reel

Remark To order evaluation samples, please contact your nearby sales office.
Part number for sample order: μPC3242TB

Caution Observe precautions when handling because these devices are sensitive to electrostatic discharge.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.

PIN CONNECTIONS AND INTERNAL BLOCK DIAGRAM

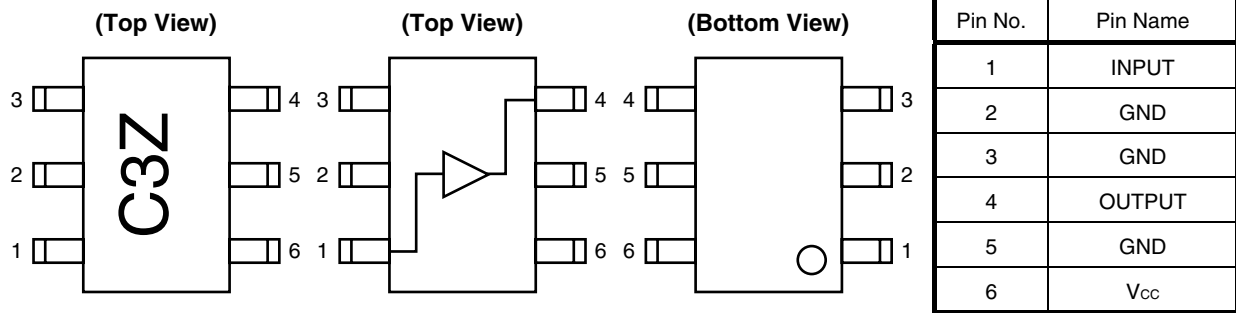

PRODUCT LINE-UP OF 5 V or 3.3 V-BIAS SILICON MMIC WIDE BAND AMPLIFIER

(T_A = +25°C, V_{cc} = +5.0 V or +3.3 V, Z_s = Z_L = 50 Ω)

Part No.	V _{cc} (V)	I _{cc} (mA)	G _p (dB)	NF (dB)	P _{o(sat)} (dBm)	P _{o(1 dB)} (dBm)	Package	Marking
μPC2711TB	+5.0	12.0	13.0 (1.0 GHz)	5.0 (1.0 GHz)	+1.0 (1.0 GHz)	-	6-pin super minimold	C1G
μPC2712TB		12.0	20.0 (1.0 GHz)	4.5 (1.0 GHz)	+3.0 (1.0 GHz)	-		C1H
μPC3215TB		14.0	20.5 (1.5 GHz)	2.3 (1.5 GHz)	+3.5 (1.5 GHz)	+1.5 (1.5 GHz)		C3H
μPC3224TB		9.0	21.5 (1.0 GHz)	4.3 (1.0 GHz)	+4.0 (1.0 GHz)	-3.5 (1.0 GHz)		C3K
				4.3 (2.2 GHz)	+1.5 (2.2 GHz)	-5.5 (2.2 GHz)		
μPC3227TB	4.8	22.0 (1.0 GHz)	4.7 (1.0 GHz)	-1.0 (1.0 GHz)	-6.5 (1.0 GHz)	C3P		
			4.6 (2.2 GHz)	-3.5 (2.2 GHz)	-8.0 (2.2 GHz)			
μPC3240TB	+3.3	13.0	25.0 (1.0 GHz)	4.3 (1.0 GHz)	-	+1.0 (1.0 GHz)	C3W	
			24.5 (2.2 GHz)	4.5 (2.2 GHz)	-	-4.0 (2.2 GHz)		
μPC3242TB	4.3	22.0 (1.0 GHz)	4.0 (1.0 GHz)	-0.5 (1.0 GHz)	-7.5 (1.0 GHz)	C3Z		
			4.0 (2.2 GHz)	-4.0 (2.2 GHz)	-9.5 (2.2 GHz)			

Remark Typical performance. Please refer to **ELECTRICAL CHARACTERISTICS** in detail.

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Conditions	Ratings	Unit
Supply Voltage	V _{CC}	T _A = +25°C	4.0	V
Total Circuit Current	I _{CC}	T _A = +25°C	10	mA
Power Dissipation	P _D	T _A = +85°C Note	270	mW
Operating Ambient Temperature	T _A		-40 to +85	°C
Storage Temperature	T _{stg}		-55 to +150	°C
Input Power	P _{in}	T _A = +25°C	-10	dBm

Note Mounted on double-sided copper-clad 50 × 50 × 1.6 mm epoxy glass PWB

RECOMMENDED OPERATING RANGE

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Supply Voltage	V _{CC}		+3.0	+3.3	+3.6	V
Operating Ambient Temperature	T _A		-40	+25	+85	°C

ELECTRICAL CHARACTERISTICS ($T_A = +25^{\circ}\text{C}$, $V_{CC} = +3.3\text{ V}$, $Z_S = Z_L = 50\ \Omega$, unless otherwise specified)


Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Circuit Current	I _{CC}	No input signal	3.6	4.3	5.0	mA
Power Gain 1	G _{P1}	f = 0.25 GHz, P _{in} = -40 dBm	19	22	25	dB
Power Gain 2	G _{P2}	f = 1.0 GHz, P _{in} = -40 dBm	19	22	25	
Power Gain 3	G _{P3}	f = 1.8 GHz, P _{in} = -40 dBm	19	22	25	
Power Gain 4	G _{P4}	f = 2.2 GHz, P _{in} = -40 dBm	19	22	25	
Gain 1 dB Compression Output Power 1	P _{O (1 dB) 1}	f = 1.0 GHz	-10	-7.5	-	dBm
Gain 1 dB Compression Output Power 2	P _{O (1 dB) 2}	f = 2.2 GHz	-12.5	-9.5	-	
Noise Figure 1	NF1	f = 1.0 GHz	-	4.0	4.8	dB
Noise Figure 2	NF2	f = 2.2 GHz	-	4.0	4.8	
Isolation 1	ISL1	f = 1.0 GHz, P _{in} = -40 dBm	31	36.5	-	dB
Isolation 2	ISL2	f = 2.2 GHz, P _{in} = -40 dBm	34	40.5	-	
Input Return Loss 1	RL _{in1}	f = 1.0 GHz, P _{in} = -40 dBm	10	14	-	dB
Input Return Loss 2	RL _{in2}	f = 2.2 GHz, P _{in} = -40 dBm	6	8.5	-	
Output Return Loss 1	RL _{out1}	f = 1.0 GHz, P _{in} = -40 dBm	8	11	-	dB
Output Return Loss 2	RL _{out2}	f = 2.2 GHz, P _{in} = -40 dBm	8	11	-	

STANDARD CHARACTERISTICS FOR REFERENCE

($T_A = +25^{\circ}\text{C}$, $V_{CC} = +3.3\text{ V}$, $Z_S = Z_L = 50\ \Omega$, unless otherwise specified)

Parameter	Symbol	Test Conditions	Reference Value	Unit
Power Gain 5	G _{P5}	f = 2.6 GHz, P _{in} = -40 dBm	20.5	dB
Power Gain 6	G _{P6}	f = 3.0 GHz, P _{in} = -40 dBm	19	
Gain Flatness	ΔG _P	f = 1.0 to 2.2 GHz, P _{in} = -40 dBm	0.4	dB
Saturated Output Power 1	P _{O (sat) 1}	f = 1.0 GHz, P _{in} = -15 dBm	-0.5	dBm
Saturated Output Power 2	P _{O (sat) 2}	f = 2.2 GHz, P _{in} = -15 dBm	-4.0	
K factor 1	K1	f = 1.0 GHz, P _{in} = -40 dBm	2.5	-
K factor 2	K2	f = 2.2 GHz, P _{in} = -40 dBm	3.4	-
Output 3rd Order Intercept Point 1	OIP ₃₁	f1 = 1 000 MHz, f2 = 1 001 MHz	1.5	dBm
Output 3rd Order Intercept Point 2	OIP ₃₂	f1 = 2 200 MHz, f2 = 2 201 MHz	-0.5	
Input 3rd Order Intercept Point 1	IIP ₃₁	f1 = 1 000 MHz, f2 = 1 001 MHz	-20	dBm
Input 3rd Order Intercept Point 2	IIP ₃₂	f1 = 2 200 MHz, f2 = 2 201 MHz	-22	
2nd Order Intermodulation Distortion	IM ₂	f1 = 1 000 MHz, f2 = 1 001 MHz, P _{in} = -40 dBm/tone	22	dBc
2nd Harmonics	2f ₀	f ₀ = 1.0 GHz, P _{in} = -40 dBm	28.5	dBc

TEST CIRCUIT

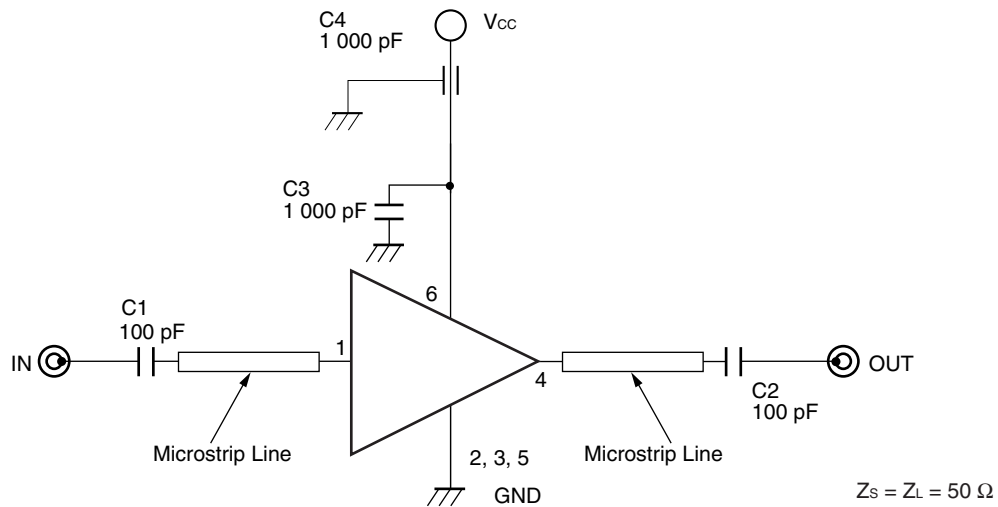

The application circuits and their parameters are for reference only and are not intended for use in actual design-ins.

COMPONENTS OF TEST CIRCUIT FOR MEASURING ELECTRICAL CHARACTERISTICS

	Type	Value
C1, C2	Chip Capacitor	100 pF
C3	Chip Capacitor	1 000 pF
C4	Feed-through Capacitor	1 000 pF


CAPACITORS FOR THE V_{CC}, INPUT AND OUTPUT PINS

Capacitors of 1 000 pF are recommendable as the bypass capacitor for the V_{CC} pin and the coupling capacitors for the input and output pins.

The bypass capacitor connected to the V_{CC} pin is used to minimize ground impedance of V_{CC} pin. So, stable bias can be supplied against V_{CC} fluctuation.

The coupling capacitors, connected to the input and output pins, are used to cut the DC and minimize RF serial impedance. Their capacitances are therefore selected as lower impedance against a 50 Ω load. The capacitors thus perform as high pass filters, suppressing low frequencies to DC.

ILLUSTRATION OF THE TEST CIRCUIT ASSEMBLED ON EVALUATION BOARD

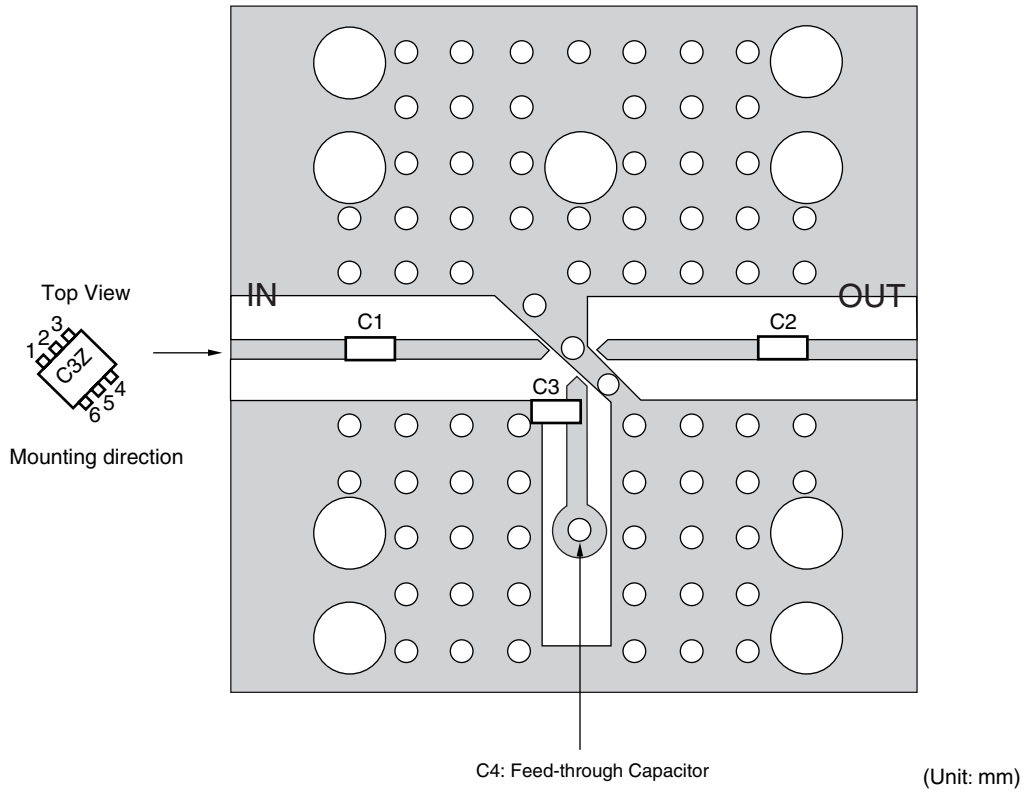

COMPONENT LIST


	Type	Value	Size
C1, C2	Chip Capacitor	100 pF	1608
C3	Chip Capacitor	1 000 pF	1608
C4	Feed-through Capacitor	1 000 pF	-

Notes


1. 30 × 30 × 0.4 mm double sided 35 μm copper clad polyimide board.
2. Back side: GND pattern
3. Au plated on pattern
4. ○○: Through holes

TYPICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, $V_{CC} = +3.3\text{ V}$, $Z_S = Z_L = 50\ \Omega$, unless otherwise specified)


CIRCUIT CURRENT vs. SUPPLY VOLTAGE

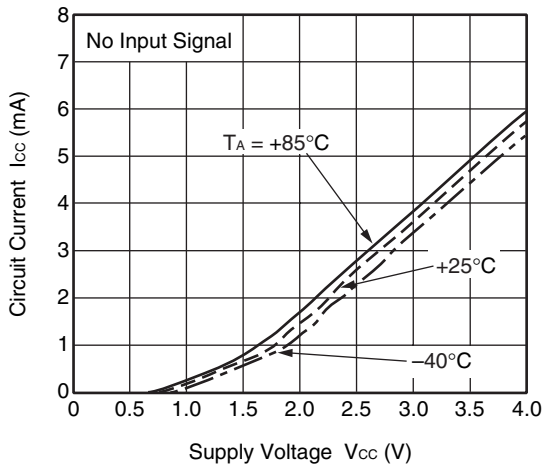


CIRCUIT CURRENT vs. OPERATING AMBIENT TEMPERATURE

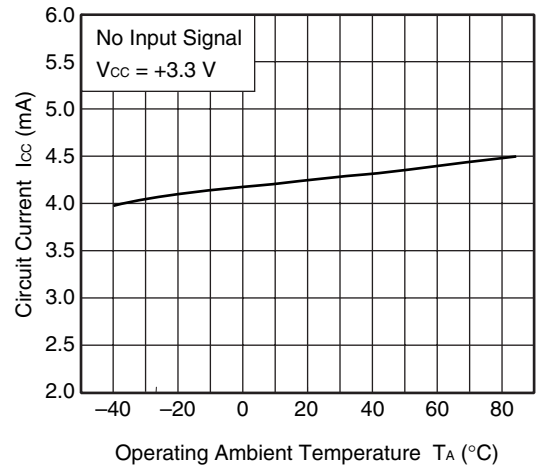


POWER GAIN vs. FREQUENCY

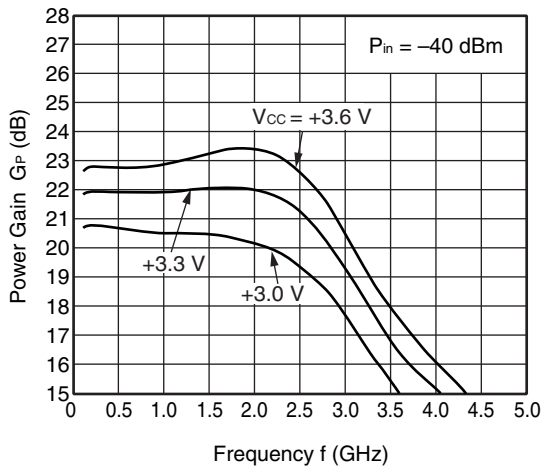


INPUT RETURN LOSS vs. FREQUENCY

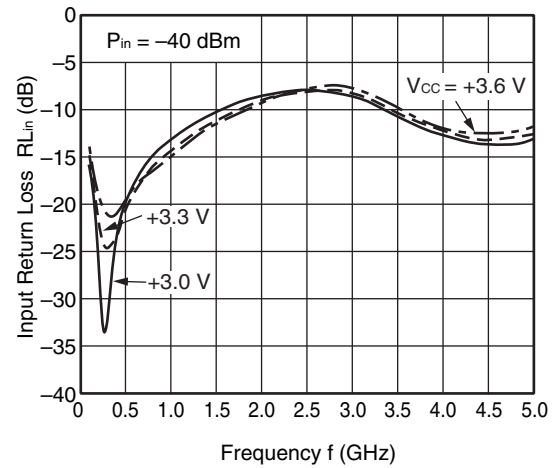

ISOLATION vs. FREQUENCY

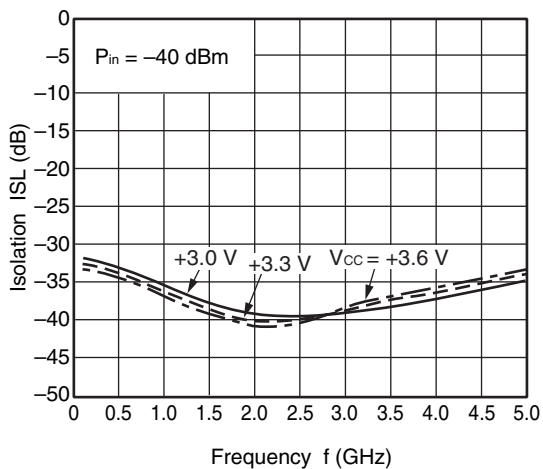


OUTPUT RETURN LOSS vs. FREQUENCY

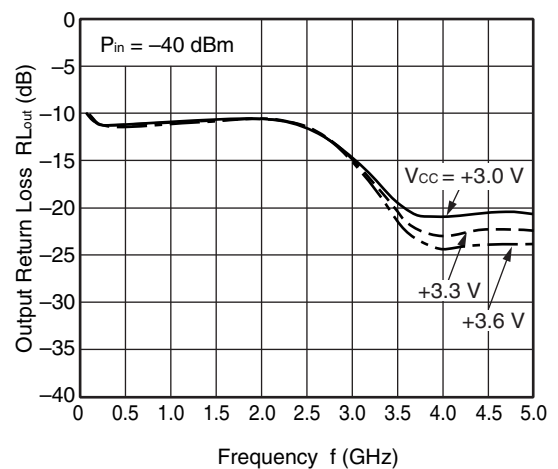


Remark The graphs indicate nominal characteristics.


POWER GAIN vs. FREQUENCY

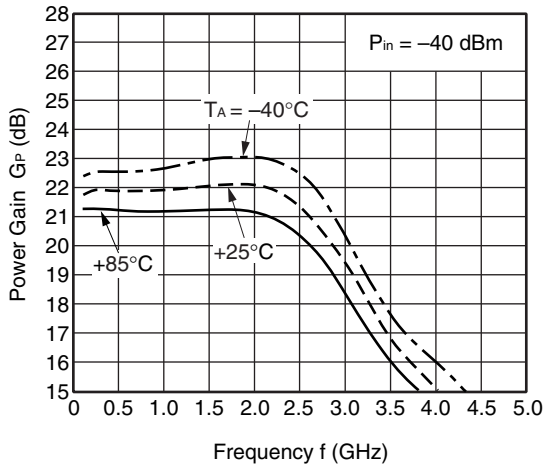


INPUT RETURN LOSS vs. FREQUENCY

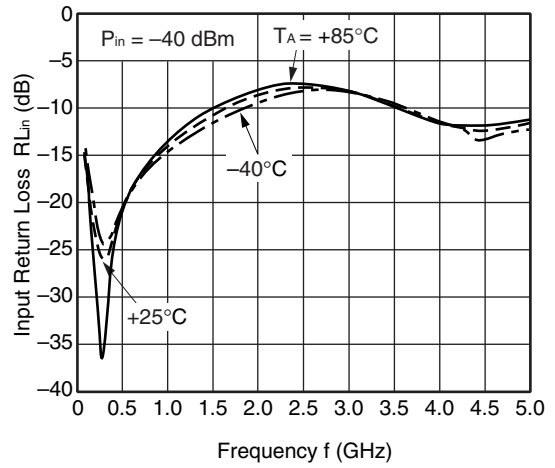


ISOLATION vs. FREQUENCY

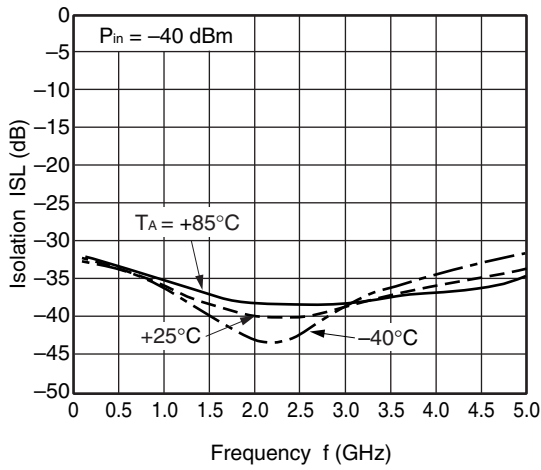


OUTPUT RETURN LOSS vs. FREQUENCY

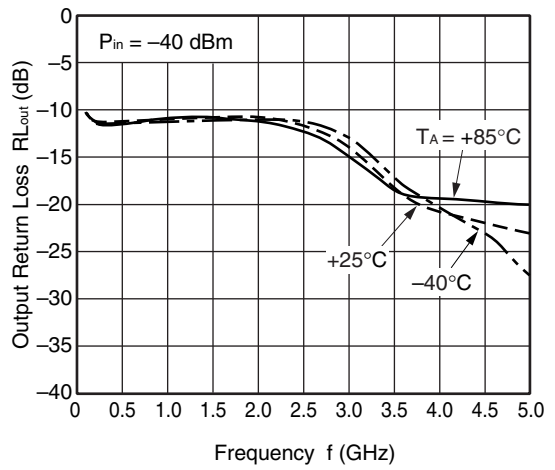






OUTPUT POWER vs. INPUT POWER

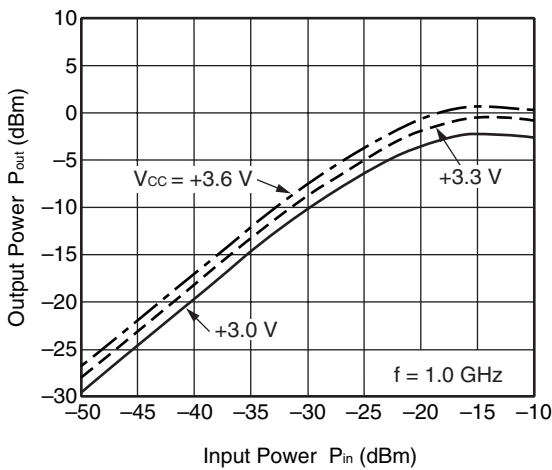







OUTPUT POWER vs. INPUT POWER

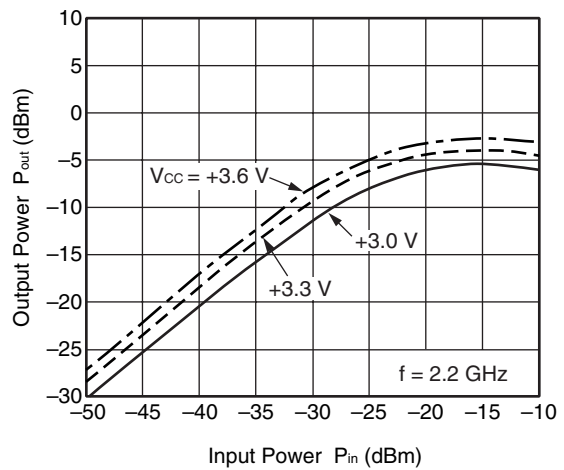







Remark The graphs indicate nominal characteristics.

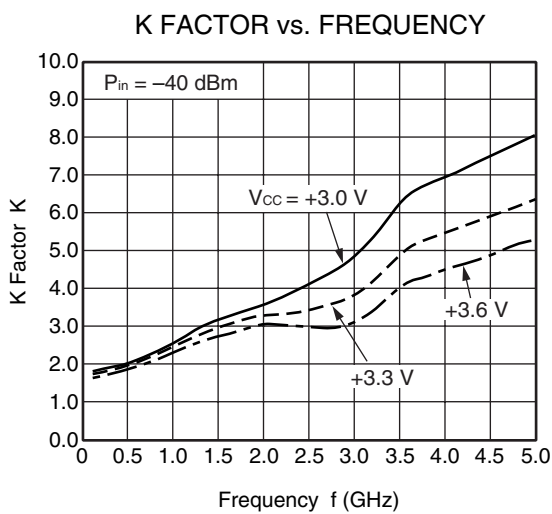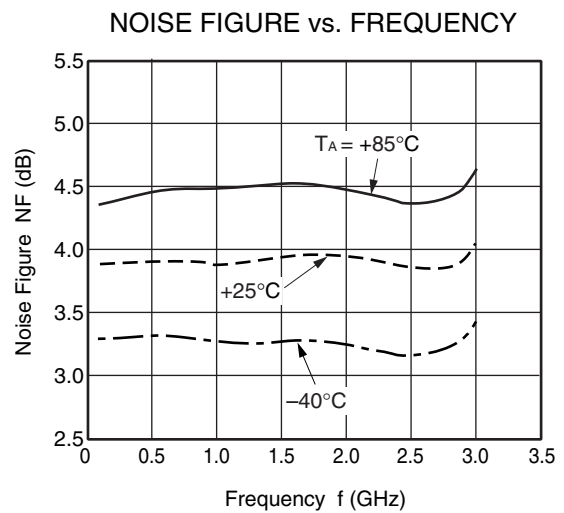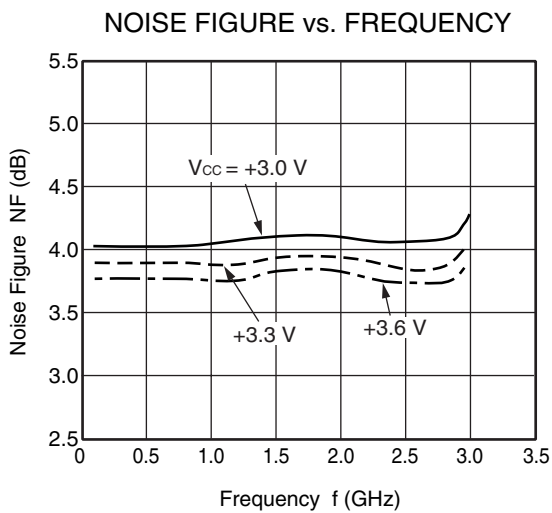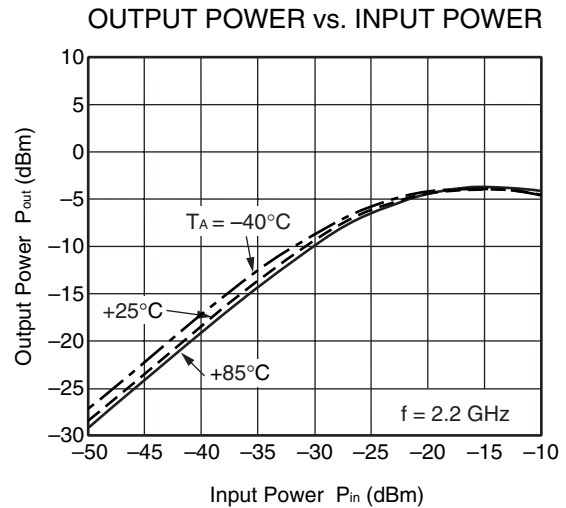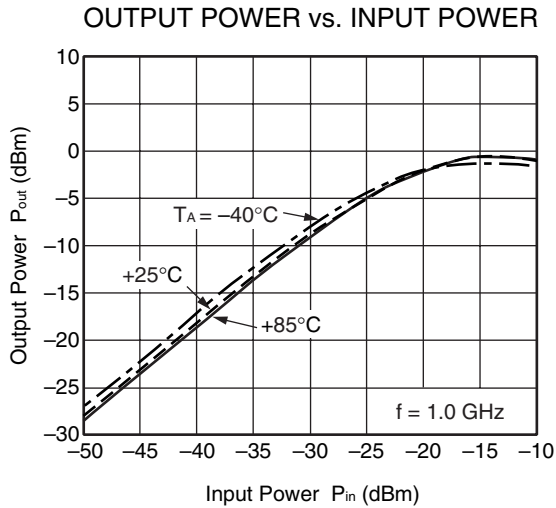







Remark The graphs indicate nominal characteristics.

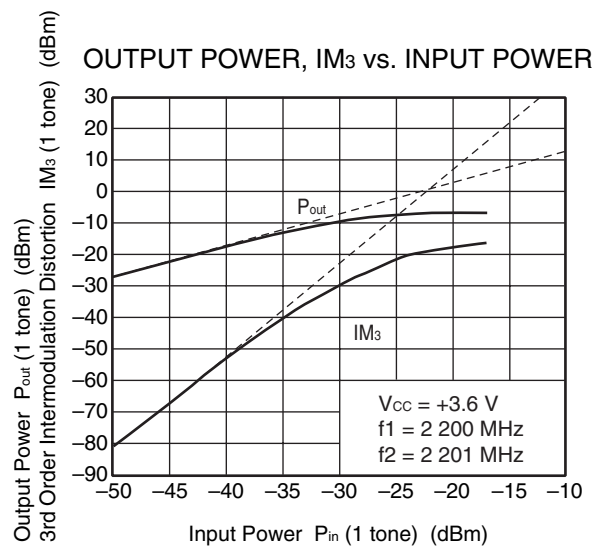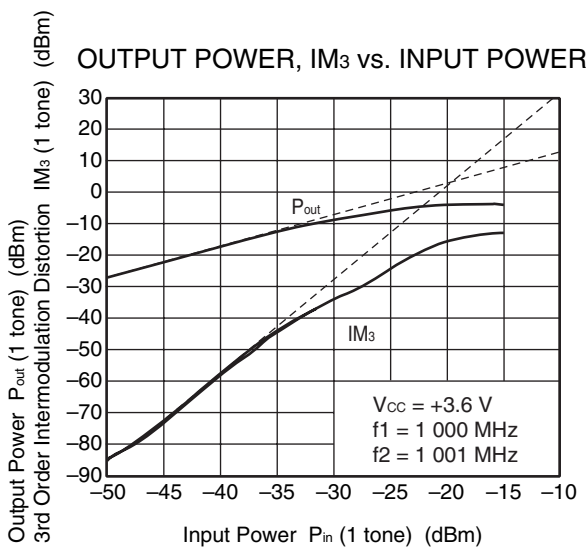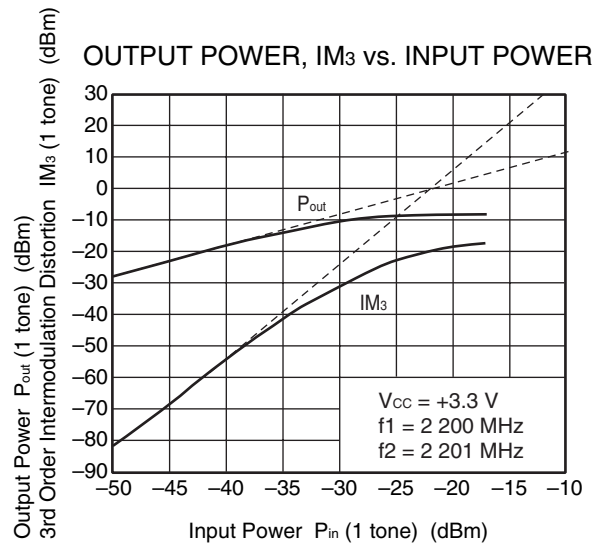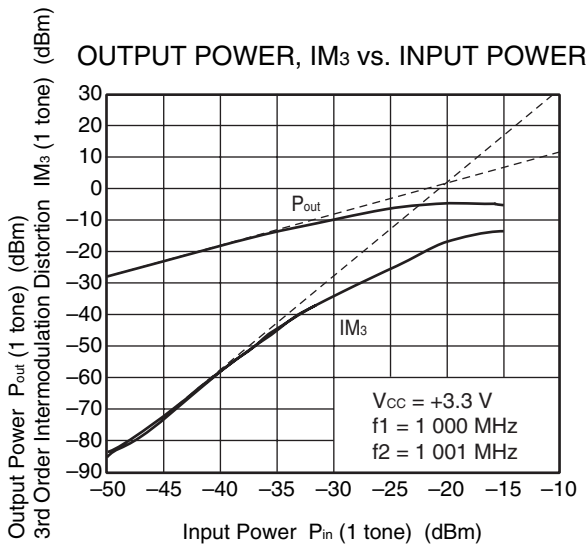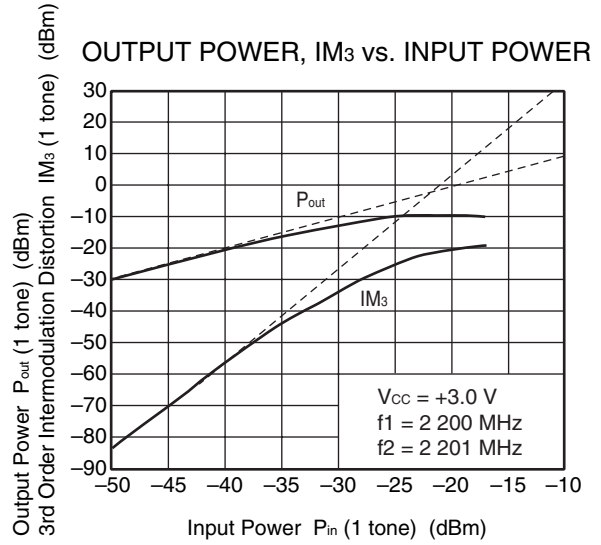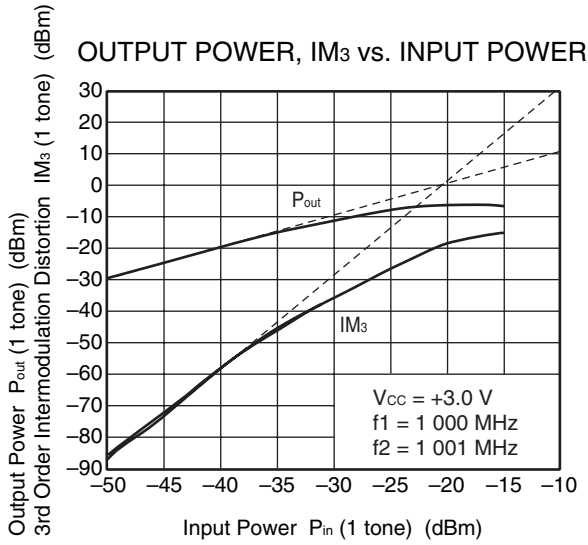







Remark The graphs indicate nominal characteristics.

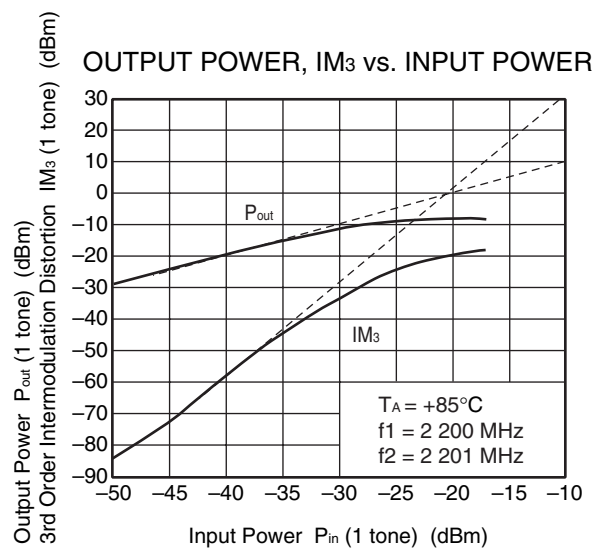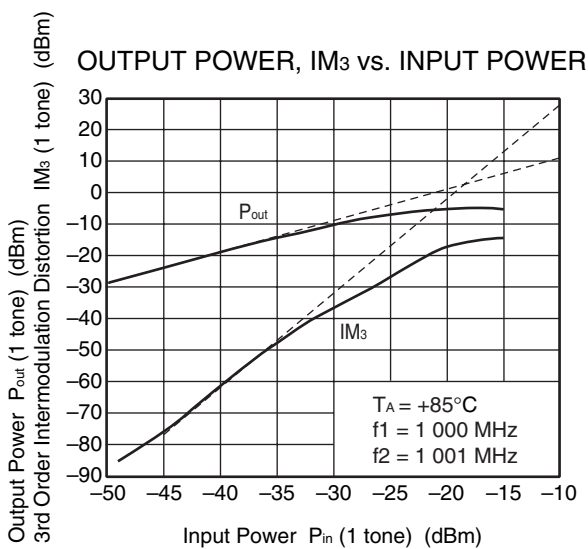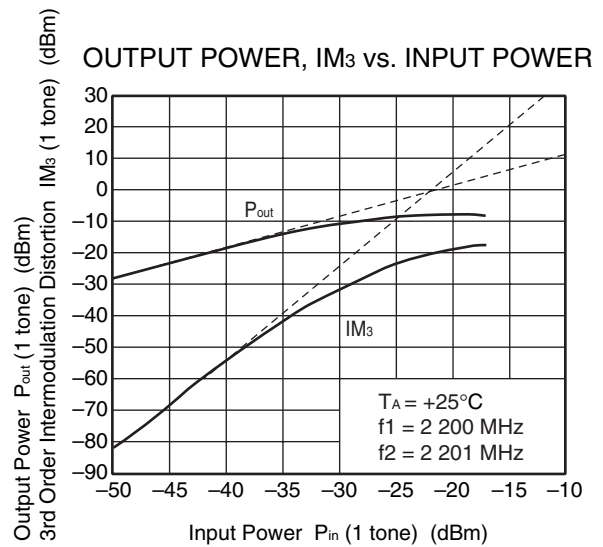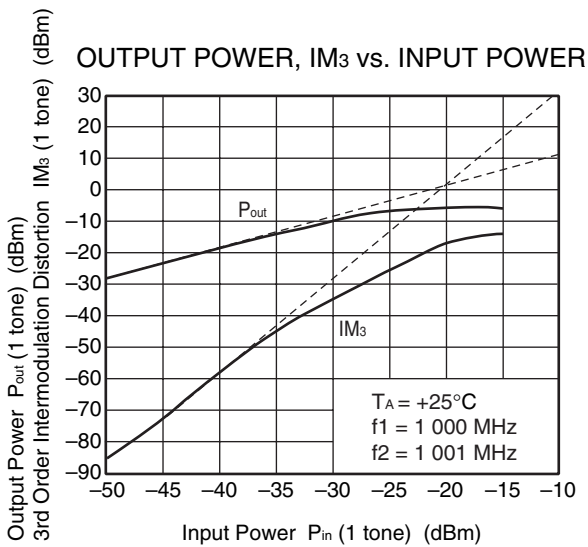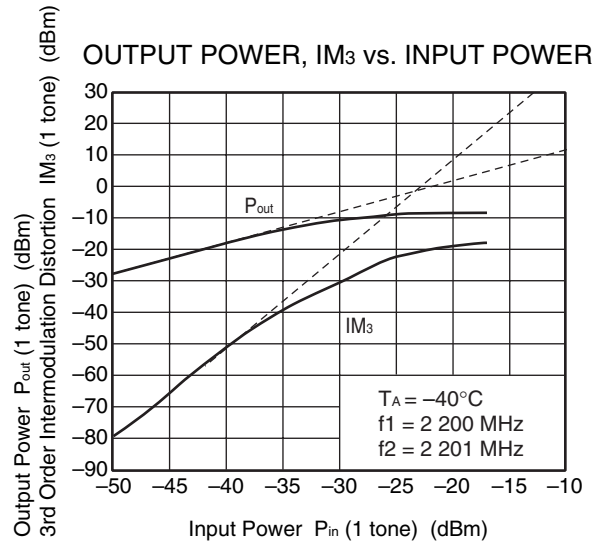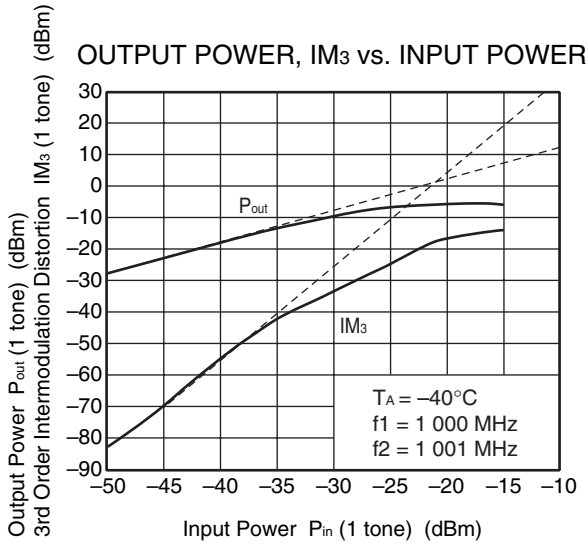







Remark The graphs indicate nominal characteristics.

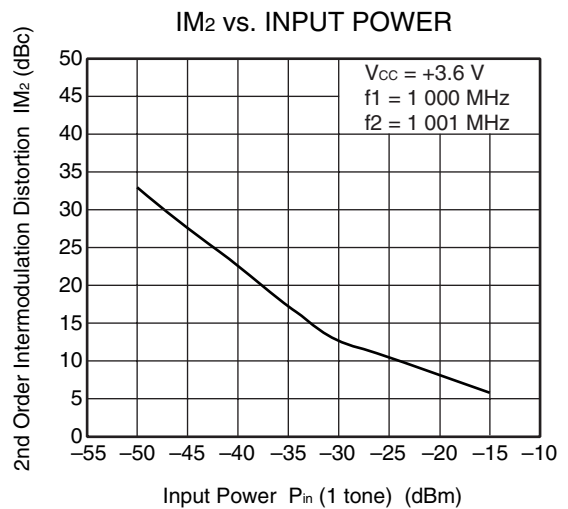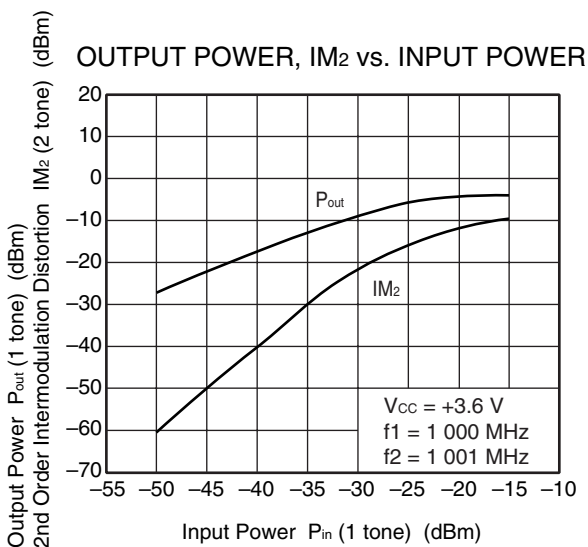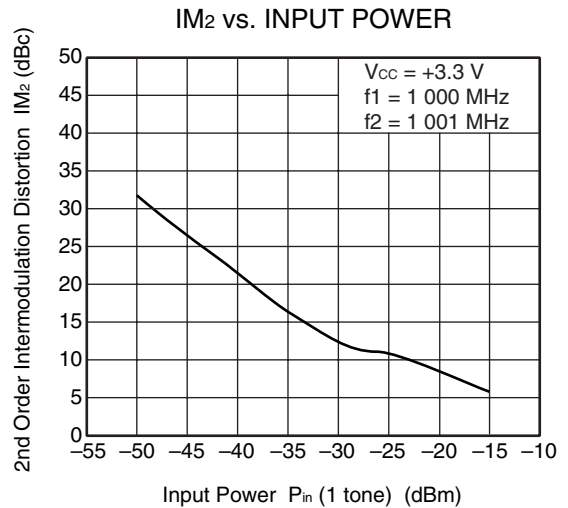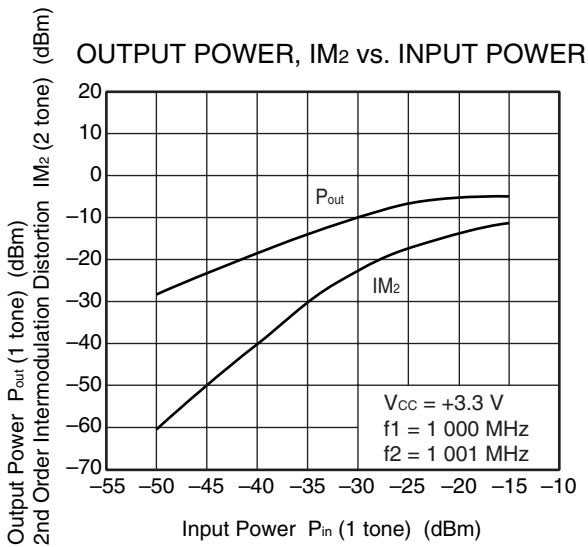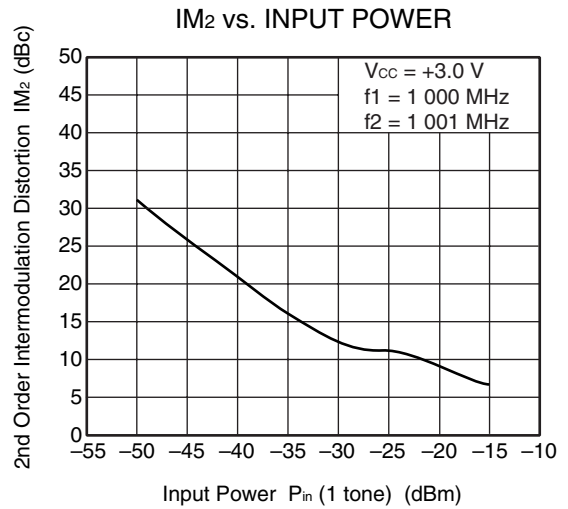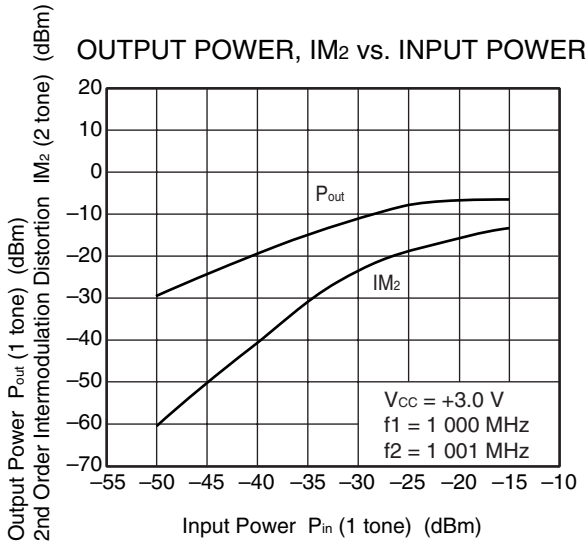

Remark The graphs indicate nominal characteristics.

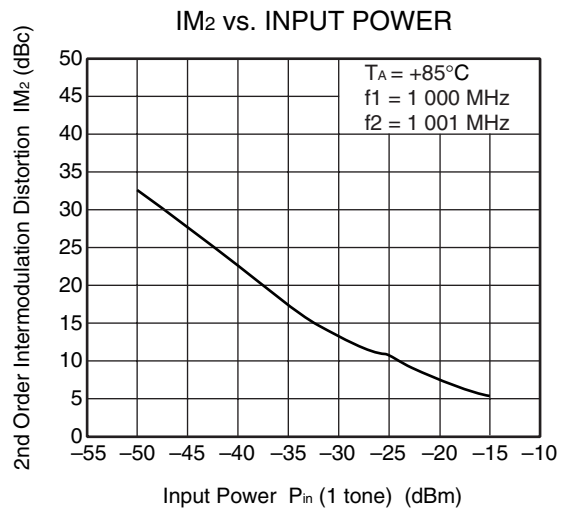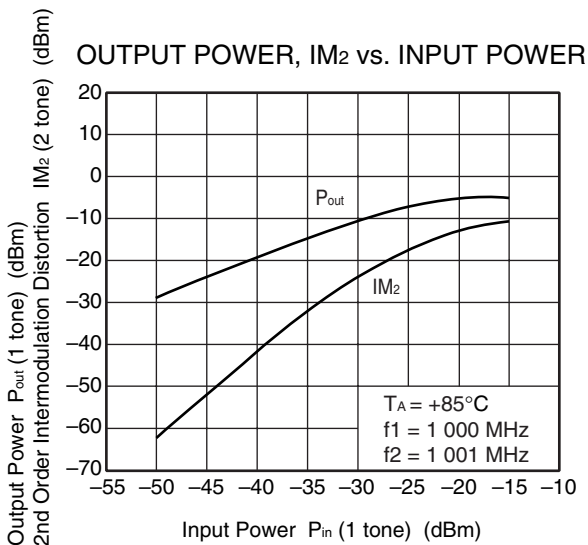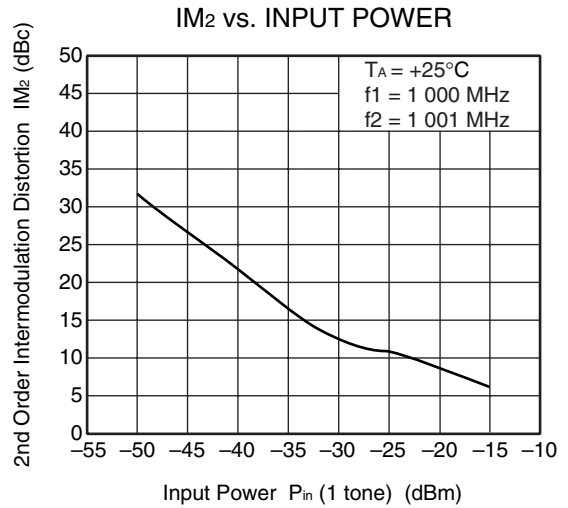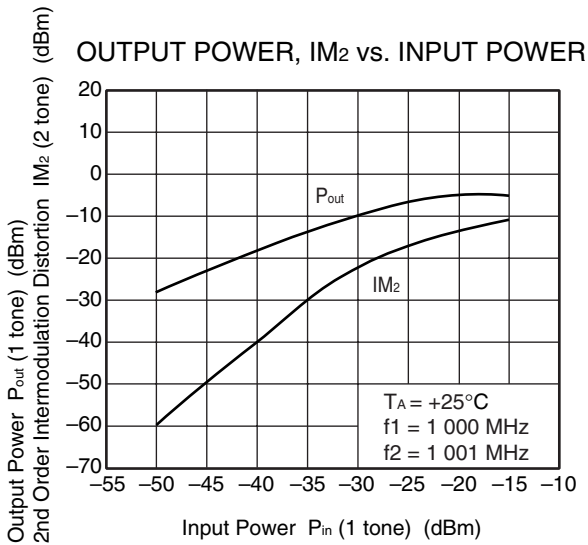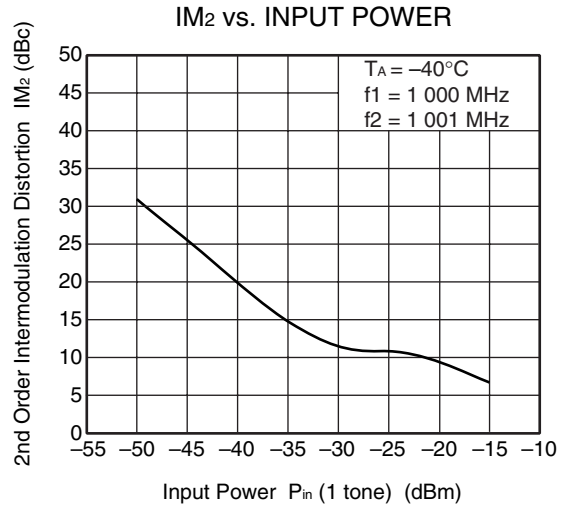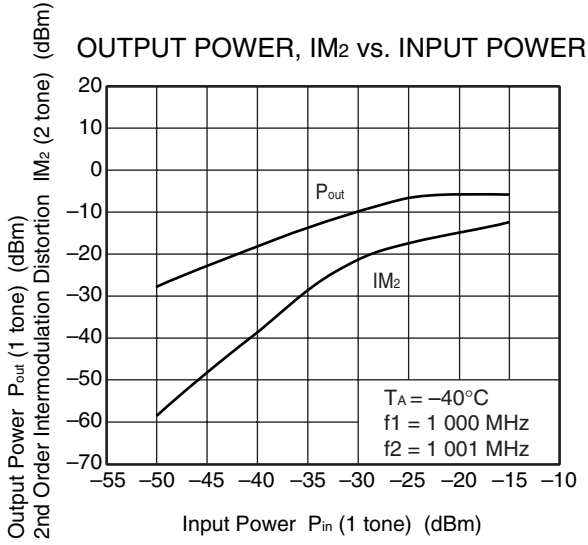

Remark The graphs indicate nominal characteristics.

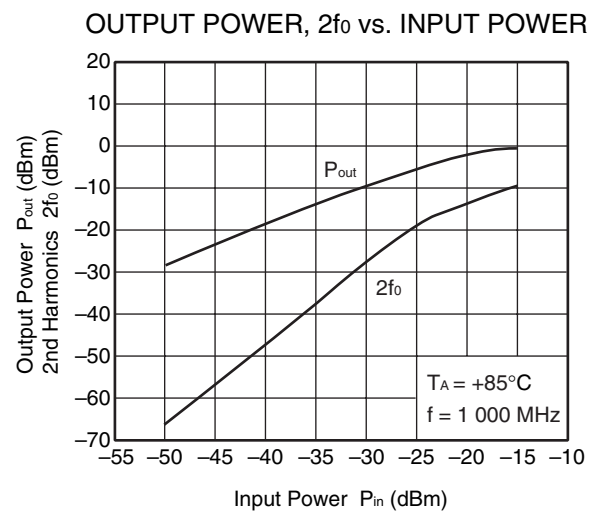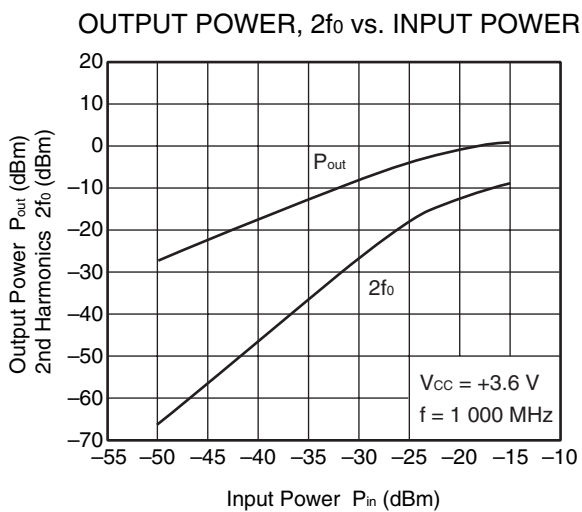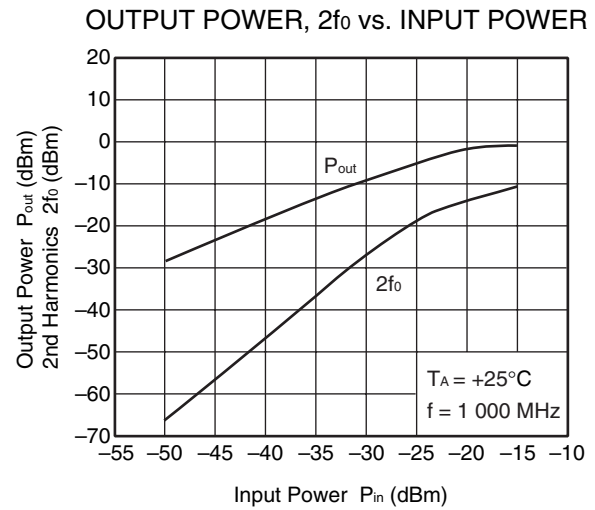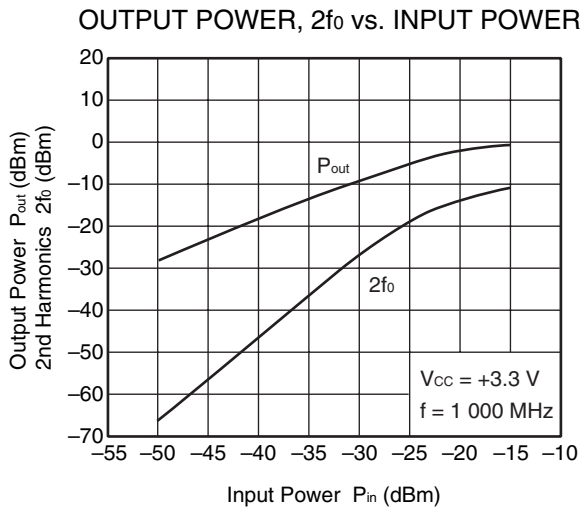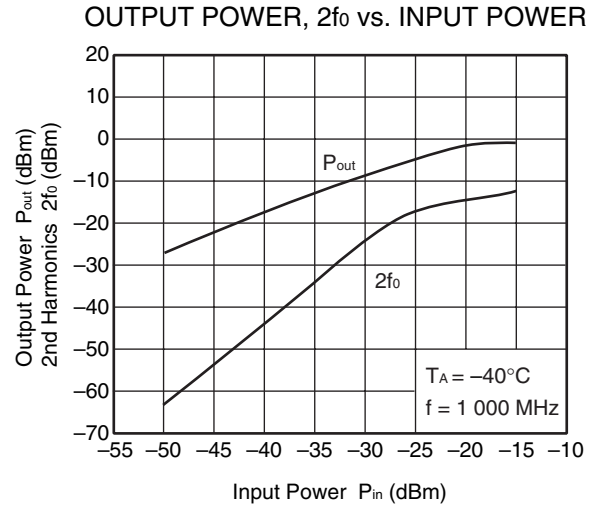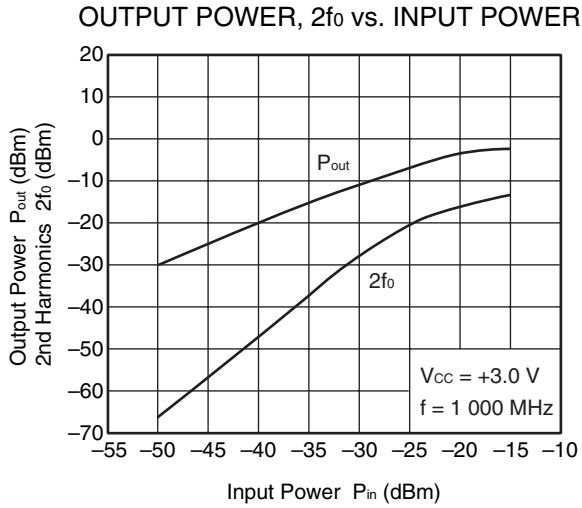


Remark The graphs indicate nominal characteristics.

S-PARAMETERS ($T_A = +25^\circ\text{C}$, $V_{CC} = 3.3\text{ V}$, $P_{in} = -40\text{ dBm}$)


S₁₁-FREQUENCY

▽ 1 : 1 000 MHz	47.35 Ω	16.60 Ω
▽ 2 : 2 200 MHz	70.96 Ω	41.34 Ω

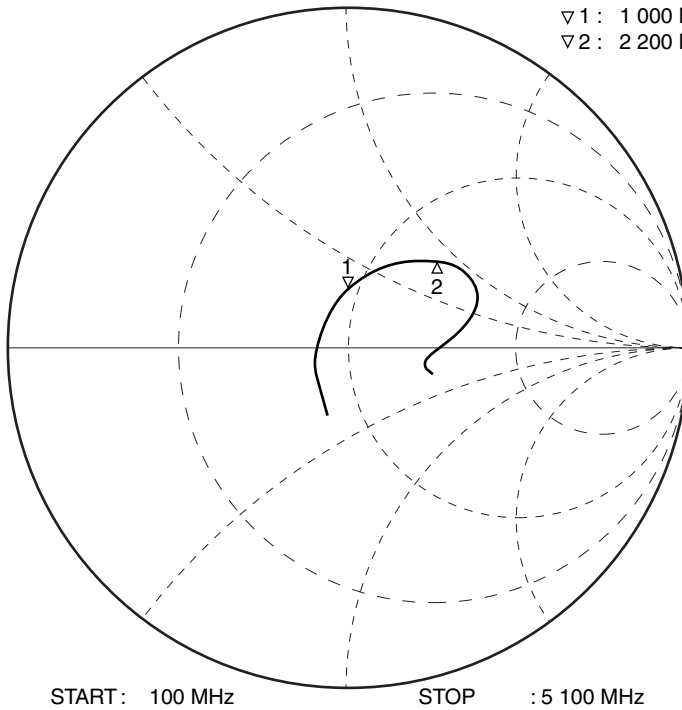

S₂₂-FREQUENCY

▽ 1 : 1 000 MHz	86.47 Ω	-7.39 Ω
▽ 2 : 2 200 MHz	70.37 Ω	28.59 Ω

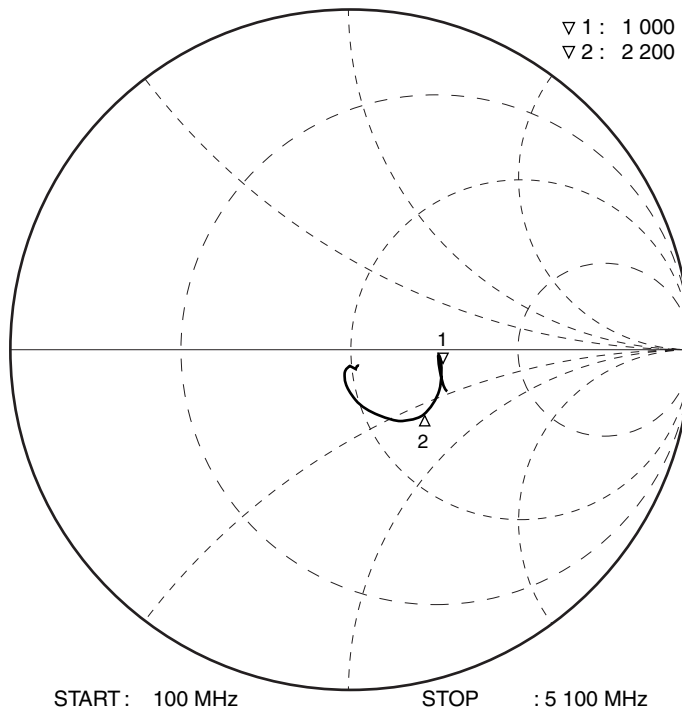

- Remarks 1.** Measured on the test circuit of evaluation board.
2. The graphs indicate nominal characteristics.

S-PARAMETERS

S-parameters and noise parameters are provided on our Web site in a format (S2P) that enables the direct import of the parameters to microwave circuit simulators without the need for keyboard inputs.


Click here to download S-parameters.

[RF and Microwave] → [Device Parameters]

URL <http://www.necel.com/microwave/en/>

PACKAGE DIMENSIONS

6-PIN SUPER MINIMOLD (UNIT: mm)

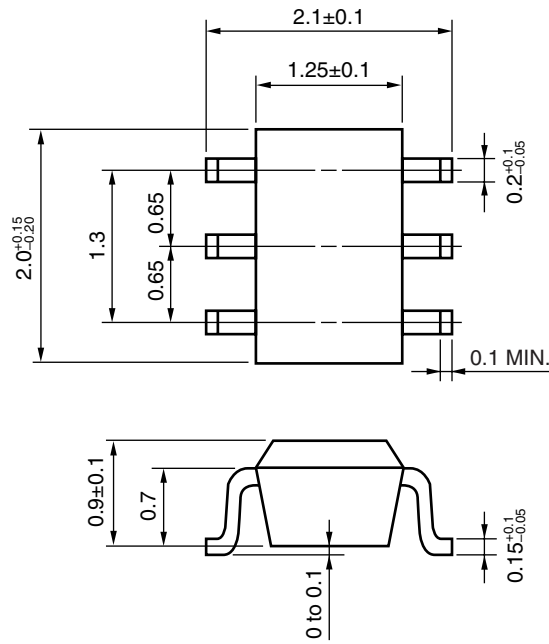

NOTES ON CORRECT USE

- (1) Observe precautions for handling because of electro-static sensitive devices.
- (2) Form a ground pattern as widely as possible to minimize ground impedance (to prevent undesired oscillation).
All the ground terminals must be connected together with wide ground pattern to decrease impedance difference.
- (3) The bypass capacitor should be attached to the V_{CC} line.
- (4) The DC cut capacitor must be attached to input and output pin.

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your nearby sales office.

Soldering Method	Soldering Conditions	Condition Symbol
Infrared Reflow	Peak temperature (package surface temperature) : 260°C or below Time at peak temperature : 10 seconds or less Time at temperature of 220°C or higher : 60 seconds or less Preheating time at 120 to 180°C : 120±30 seconds Maximum number of reflow processes : 3 times Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	IR260
Wave Soldering	Peak temperature (molten solder temperature) : 260°C or below Time at peak temperature : 10 seconds or less Preheating temperature (package surface temperature) : 120°C or below Maximum number of flow processes : 1 time Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	WS260
Partial Heating	Peak temperature (terminal temperature) : 350°C or below Soldering time (per side of device) : 3 seconds or less Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	HS350

Caution Do not use different soldering methods together (except for partial heating).

- **The information in this document is current as of March, 2010. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.**
- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.
- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. In addition, NEC Electronics products are not taken measures to prevent radioactive rays in the product design. When customers use NEC Electronics products with their products, customers shall, on their own responsibility, incorporate sufficient safety measures such as redundancy, fire-containment and anti-failure features to their products in order to avoid risks of the damages to property (including public or social property) or injury (including death) to persons, as the result of defects of NEC Electronics products.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific".

The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.

"Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.

"Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).

"Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

(Note)

- (1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).