


HIGH SPEED, HIGH VOLTAGE SWITCHING APPLICATIONS.
SWITCHING REGULATOR, DC-DC CONVERTER AND MOTOR
DRIVE APPLICATIONS.

FEATURES:

- . High Breakdown Voltage : $V_{(BR)DSS}=450V$
- . High Forward Transfer Admittance : $|Y_{fs}|=5S$ (Typ.)
- . Low Leakage Current : $I_{GSS}=\pm 100nA$ (Max.) @ $V_{GS}=\pm 20V$
 $I_{DSS}=1mA$ (Max.) @ $V_{DS}=450V$
- . Enhancement-Mode : $V_{th}=1.5 \sim 3.5V$ @ $I_D=1mA$

MAXIMUM RATINGS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Drain-Source Voltage	V_{DSX}	450	V
Gate-Source Voltage	V_{GSS}	± 20	V
Drain Current	DC	I_D	10
	Pulse	I_{DP}	15
Drain Power Dissipation ($T_c=25^\circ C$)	P_D	120	W
Channel Temperature	T_{ch}	150	$^\circ C$
Storage Temperature Range	T_{stg}	-55 ~ 150	$^\circ C$

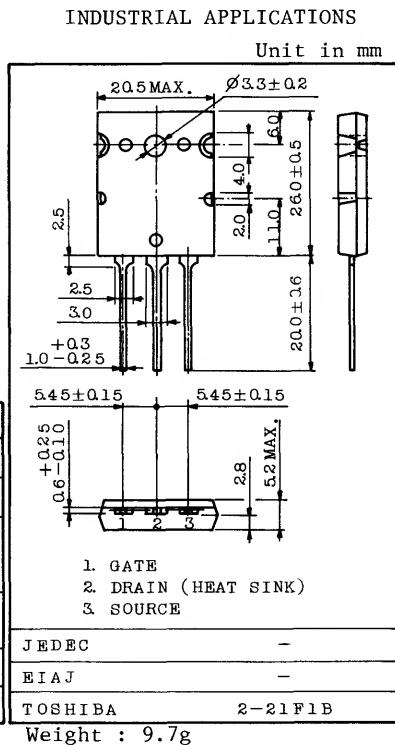

Weight : 9.7g

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Gate Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0$	-	-	± 100	nA	
Drain Cut-off Current	I_{DSS}	$V_{DS}=450V, V_{GS}=0$	-	-	1.0	mA	
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$I_D=10mA, V_{GS}=0$	450	-	-	V	
Gate Threshold Voltage	V_{th}	$V_{DS}=10V, I_D=1mA$	1.5	-	3.5	V	
Forward Transfer Admittance	$ Y_{fs} $	$V_{DS}=10V, I_D=5A$	3.0	5.0	-	S	
Drain-Source ON Resistance	$R_{DS(ON)}$	$I_D=5A, V_{GS}=10V$	-	0.5	0.7	Ω	
Drain-Source ON Voltage	$V_{DS(ON)}$	$I_D=10A, V_{GS}=10V$	-	5.5	8	V	
Input Capacitance	C_{iss}	$V_{DS}=10V, V_{GS}=0, f=1MHz$	-	1600	2000	pF	
Reverse Transfer Capacitance	C_{rss}	$V_{DS}=10V, V_{GS}=0, f=1MHz$	-	140	300	pF	
Output Capacitance	C_{oss}	$V_{DS}=10V, V_{GS}=0, f=1MHz$	-	400	600	pF	
Switching Time	Rise Time	t_r		-	50	100	ns
	Turn-on Time	t_{on}		-	80	150	ns
	Fall Time	t_f		-	80	150	ns
	Turn-off Time	t_{off}		-	350	700	ns