

MOS Field Effect Transistor

2SK3902


■ Features

- Low On-state resistance

$R_{DS(on)1} = 21\text{m}\Omega$ MAX. ($V_{GS} = 10\text{ V}$, $I_D = 15\text{ A}$)

$R_{DS(on)2} = 26\text{ m}\Omega$ MAX. ($V_{GS} = 4.5\text{ V}$, $I_D = 15\text{ A}$)

- Low C_{iss} : $C_{iss} = 1200\text{ pF}$ TYP.

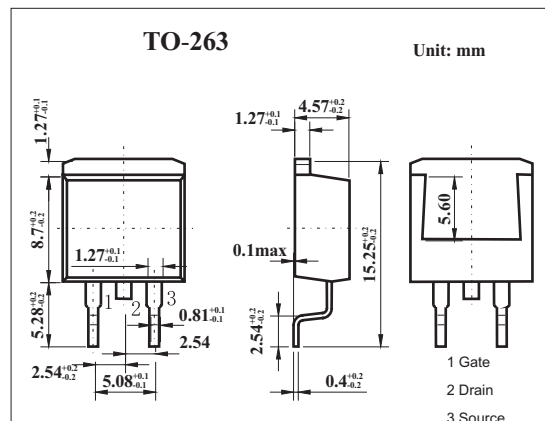

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Drain to source voltage	V_{DS}	60	V
Gate to source voltage	V_{GS}	± 20	V
Drain current	I_D	± 30	A
	I_{DP}^*	± 90	A
Power dissipation	P_D	1.5	W
		45	
Channel temperature	T_{ch}	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

* $PW \leq 10\text{ }\mu\text{s}$, Duty Cycle $\leq 1\%$

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Drain cut-off current	I_{DSS}	$V_{DS}=60\text{ V}, V_{GS}=0$			10	$\mu\text{ A}$
Gate leakage current	I_{GSS}	$V_{GS}=\pm 20\text{ V}, V_{DS}=0$			± 10	$\mu\text{ A}$
Gate cut off voltage	$V_{GS(off)}$	$V_{DS}=10\text{ V}, I_D=1\text{ mA}$	1.5	2.0	2.5	V
Forward transfer admittance	$ Y_{fs} $	$V_{DS}=10\text{ V}, I_D=15\text{ A}$	9.5	19		S
Drain to source on-state resistance	$R_{DS(on)1}$	$V_{GS}=10\text{ V}, I_D=15\text{ A}$		16.8	21	$\text{m}\Omega$
	$R_{DS(on)2}$	$V_{GS}=4.5\text{ V}, I_D=15\text{ A}$		19.5	26	$\text{m}\Omega$
Input capacitance	C_{iss}	$V_{DS}=10\text{ V}, V_{GS}=0, f=1\text{ MHz}$		1200		pF
Output capacitance	C_{oss}			250		pF
Reverse transfer capacitance	C_{rss}			85		pF
Turn-on delay time	t_{on}	$I_D=15\text{ A}, V_{GS(on)}=10\text{ V}, R_G=0\text{ }\Omega, V_{DD}=30\text{ V}$		10		ns
Rise time	t_r			4		ns
Turn-off delay time	t_{off}			37		ns
Fall time	t_f			4		ns
Total Gate Charge	Q_G	$V_{DD} = 48\text{ V}$		25		nC
Gate to Source Charge	Q_{GS}	$V_{GS} = 10\text{ V}$		4.5		nC
Gate to Drain Charge	Q_{GD}	$I_D = 30\text{ A}$		6.0		nC