


PHASE NOISE (1 Hz BW, typical)

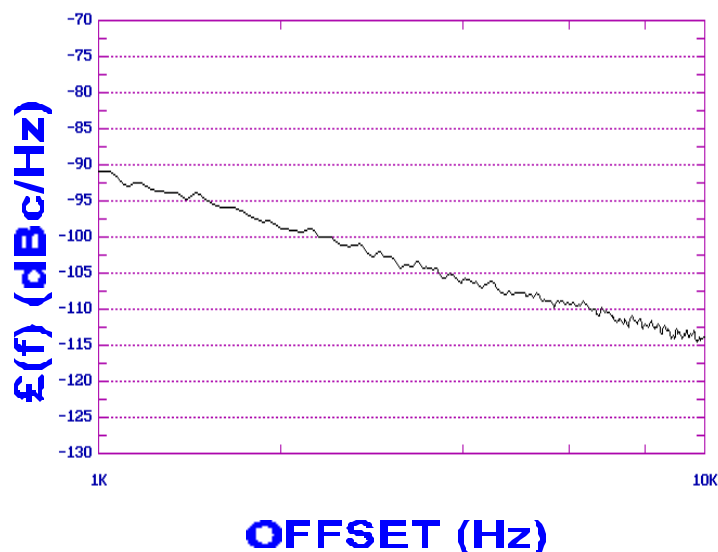


FEATURES
- Frequency Range: 526 - 541 MHz - Tuning Voltage: 0.5-4.5 Vdc - MINI-16M-LOW - Style Package
APPLICATIONS
- Mobitex Radios - RF Modems - Satellite Communications

PERFORMANCE SPECIFICATIONS	VALUE	UNITS
Oscillation Frequency Range	526 - 541	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-114	dBc/Hz
Harmonic Suppression (2nd, typ.)	-10	dBc
Tuning Voltage	0.5-4.5	Vdc
Tuning Sensitivity (avg.)	10	MHz/V
Power Output	0±4	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	50	pF
Pushing	<1	MHz/V
Pulling (14 dB Return Loss, Any Phase)	<1	MHz
Operating Temperature Range	-40 to 85	°C
Package Style	MINI-16M-LOW	
POWER SUPPLY REQUIREMENTS		
Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	9	mA


All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES
- AN-100/1 : Mounting and Grounding of VCOs - AN-102 : Proper Output Loading of VCOs - AN-107 : How to Solder Z-COMM VCOs
NOTES:

TUNING CURVE, typ.

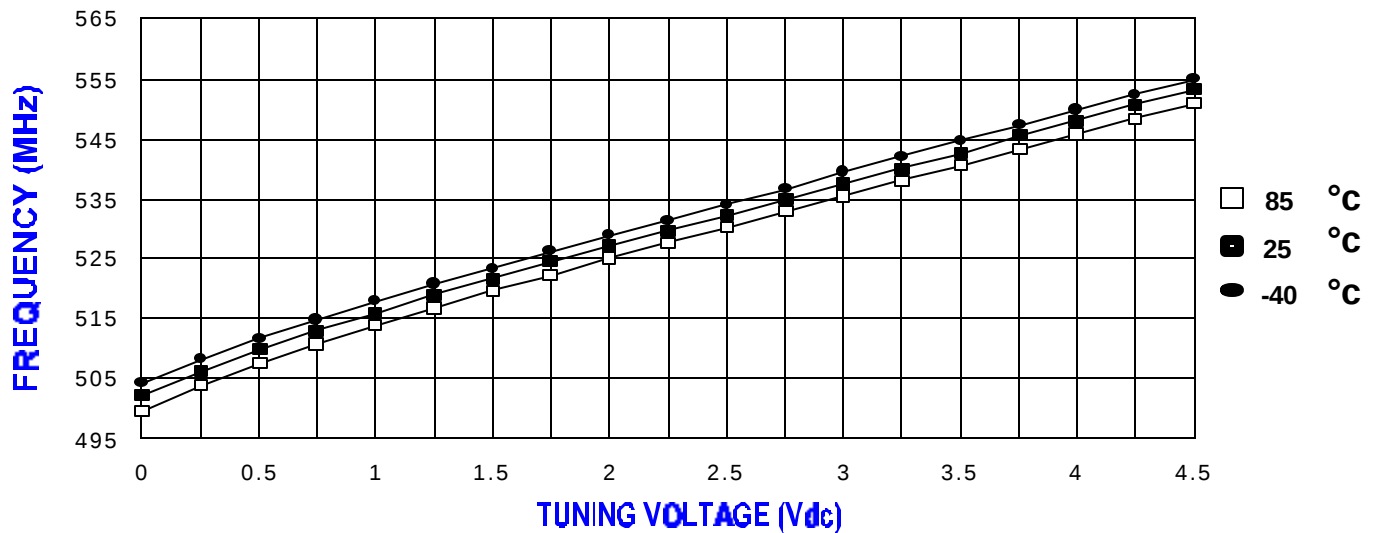

POWER CURVE, typ.

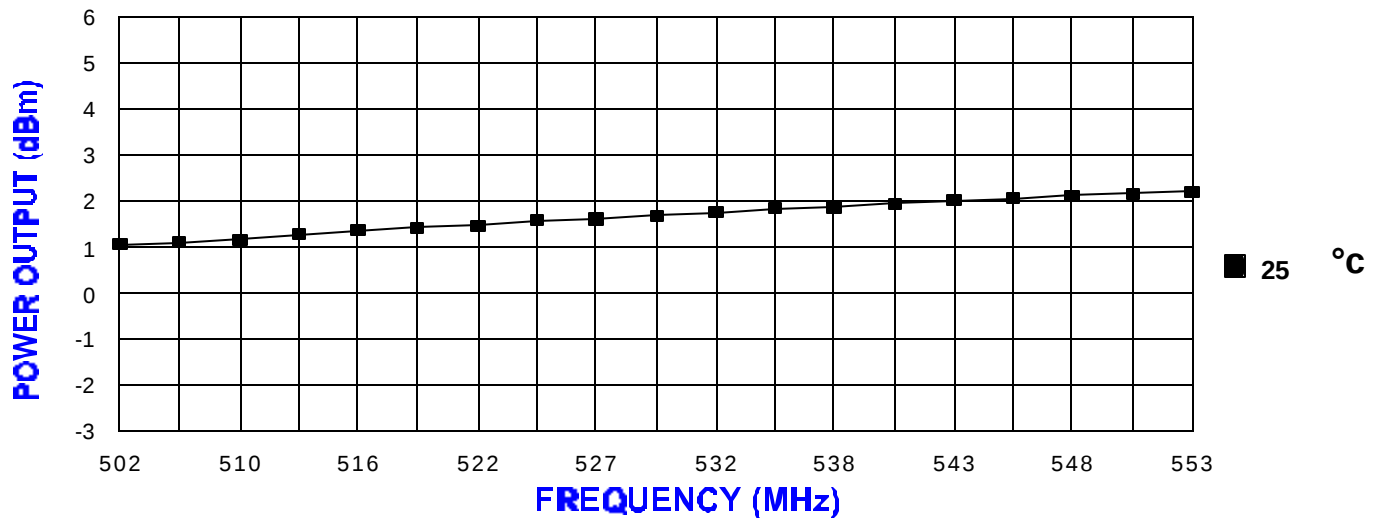

PHYSICAL DIMENSIONS

