

WL2817

Ultra low dropout, 500mA/1A, CMOS LDO

[Http://www.sh-willsemi.com](http://www.sh-willsemi.com)

Descriptions

The WL2817 series are ultra low dropout, Low quiescent current, high PSRR CMOS LDO.

Using CMOS construction, the quiescent current consumed by the WL2817 is typically 160 μ A over the entire input voltage range, making it attractive for consumer, networking applications that demand high output current. The WL2817 series are available in wide output voltage range version from 1.0V to 3.3V.

The WL2817 series offer thermal shutdown (OTP) and current limit functions, to assure the stability of chip and power system at wrong condition, and it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

The WL2817 series can choose the output current limit between 1.0A or 500mA by alternating the LCON pin between "H" or "L".

The WL2817 regulators are available in DFN1612-8L packages. Standard products are Pb-free and Halogen-free.

Features


- Input voltage : 2.5V~5.5V
- Output voltage range : 1.0V 1.8V 2.8V 3V 3.3V
- Output current : 500mA/1A
- PSRR : 60dB(@ Vout=3V)
- Dropout voltage : 70mV @ I_{OUT}=0.5A
- Output noise : 50 μ V_{RMS}
- Quiescent current : 160 μ A Typ.

Applications


- LCD TV
- STB
- Computer, Graphic card
- Network communication equipments
- Others portable electronics devices



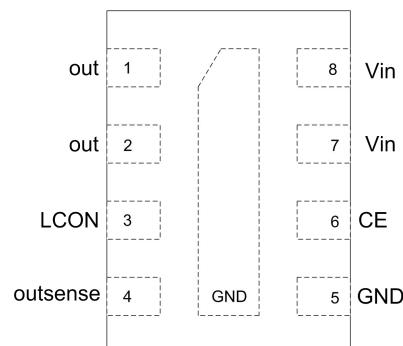DFN1216-8



Pin Configuration (Top View)




B = Device code (3.0V)

* = Month code (N: 2015.01,
O:2015.02, and so on)

Marking

Order Information

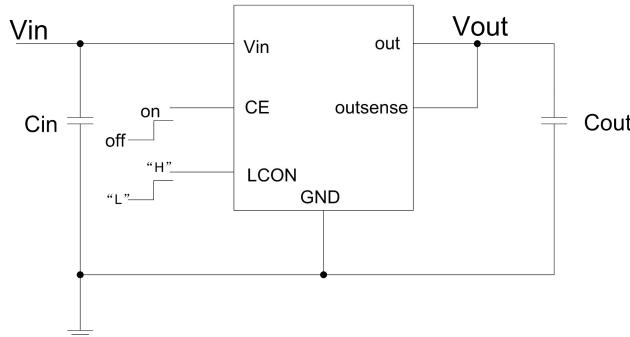
For detail information, Please refer to page 9.

Typical Application


	Min.	Typ.	Max.
C_{IN}		4.7uF	
C_{OUT}		1uF	

Pin Description

PIN	Symbol	Description
1	V_{out}	Output
2	V_{out}	Output
3	$LCON$	Output Current Limit Alternate Pin ("H" =1A, "L" =500mA)
4	$outsense$	Feedback Pin
5	GND	Ground
6	CE	Enable, Active High
7	VDD	Input
8	VDD	Input

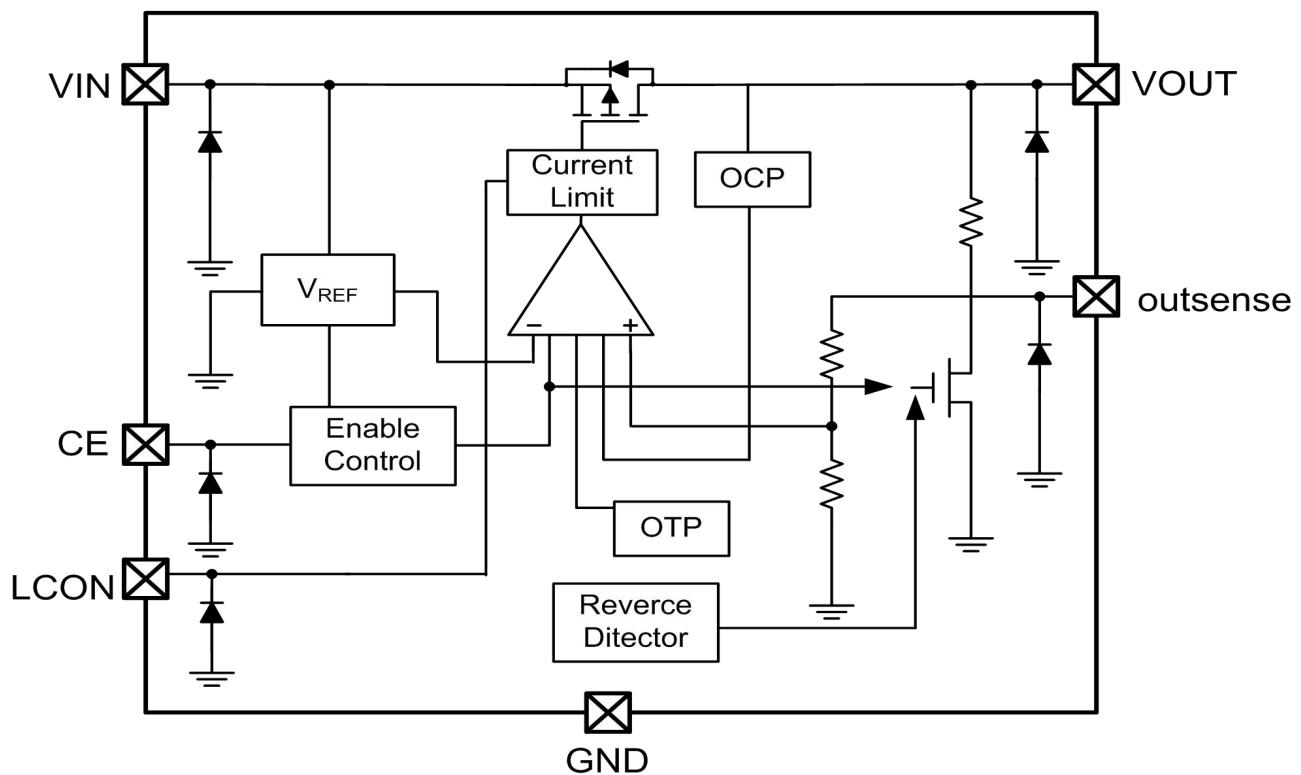Block Diagram


Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Input voltage range	V _{IN}	-0.3~6.5	V
EN voltage range	V _{EN}	-0.3~V _{IN}	V
LCON voltage range	V _{LCON}	-0.3~V _{IN}	V
Output voltage range	V _{OUT}	-0.3~V _{IN}	V
Power dissipation *1	P _D	625	mW
Thermal resistance	R _{θJA}	165	°C/W
Junction temperature	T _J	150	°C
Lead temperature(10s)	T _L	260	°C
Storage temperature	T _{stg}	-55 ~ 150	°C
ESD Ratings	HBM	2000	V
	MM	200	V

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

*1: Power dissipation is calculate by P_D = (V_{IN}-V_{OUT}) × I_{OUT}

Recommend Operating Ratings

Parameter	Symbol	Value	Unit
Operating Supply voltage	V _{IN}	2.5~5.5	V
Operating Temperature Range	T _{opr}	-40~85	°C

Electronics Characteristics (Ta=25°C, V_{IN}=V_{OUT}+1V, C_{IN}=4.7uF, C_{OUT}=1uF, I_{OUT}=1mA, LCON=EN=Vin, unless otherwise noted)

Parameter	Symbol	Condition		Min.	Typ.	Max.	Unit
Output Voltage	V _{OUT}	T=25°C		V _{oset} *0.98	V _{oset}	V _{oset} *1.02	V
		-40°C≤T≤85°C		V _{oset} *0.97	V _{oset}	V _{oset} *1.03	
Current Limit	I _{LIM}	Vin=Vset+0.5V	LCON= "H"	1			A
			LCON= "L"	0.5			A
Dropout Voltage	V _{DROP}	V _{out} =V _{out} *0.97	I _{out} =0.5A		70		mV
Load Regulation	△V _{Load}	Vin=Vset+0.5V 脉冲法测试	LCON= "H": 1mA≤I _{out} ≤1A		3.5		mV
			LCON= "L": 1mA≤I _{out} ≤0.5A		1.5		mV
UVLO	V _{uvlo}				2		V
Line Regulation	△V _{LINE}	V _{set} +0.5V≤Vin≤5.5V (Vin≥UVLO)			5	10	mV
Quiescent Current	I _Q	I _{OUT} =0			160	220	uA
Shut-down Current	I _{SHDN}	V _{EN} = 0V			1	3	uA
Vout Temperature Coefficient	ΔV _{out} /ΔT	-40°C≤T≤85°C			100		Ppm/ °C
Short Current Limit	I _{sc}	V _{out} =0V	LCON= "H"		160		mA
			LCON= "L"		80		mA
Inrush Current Limit	I _{rush} ^{*1}	CC mode	LCON= "H"		500		mA
			LCON= "L"		250		mA
Reverse Current	I _{rev} ^{*2}	V _{out} =V _{set} +1V; EN=0; 0≤Vin≤V _{rev_del}			4.5	10	uA
Detector offset voltage in reverse current protection mode	V _{rev_det} ^{*3}	V _{out} =V _{set} +1V; EN=0			0.5		V
Release offset voltage in reverse current protection mode	V _{rev_rel} ^{*4}	V _{out} =V _{set} +1V; EN=0			0.35		V
Max reverse Current	I _{revmax} ^{*5}	V _{out} =V _{set} +1V; EN=0			70		uA
Discharge resistance	R _{dis}	EN=0			60		Ω
Power Supply Ripple Rejection	PSRR	V _{IN} =(V _{OUT} +1V) _{DC} +0.2V _{P-P} F=1KHz, I _{OUT} =10mA			60		dB
Output noise voltage (V _{out} =3V)	e _{NO}	BW=10Hz to 100KHz I _O =0			40		μV _{RMS}
		BW=10Hz to 100KHz I _O =10mA			60		
Output noise voltage (V _{out} =1.0V)	e _{NO}	BW=10Hz to 100KHz I _O =0			20		μV _{RMS}
		BW=10Hz to 100KHz I _O =10mA			35		
EN logic high voltage	V _{ENH}	V _{IN} =5.5V, I _{OUT} =1mA		1.2			V

EN logic low voltage	V_{ENL}	$V_{IN}=5.5V, I_{OUT}=0mA$			0.4	V
EN pull-down current	I_{en}			0.2	1	uA
LCON pull-down current	I_{LCON}			0.2	1	uA
EN logic high voltage	V_{ENH}		1.2			V
EN logic low voltage	V_{ENL}				0.4	V
LCON logic high voltage	V_{ENH}		1.2			V
LCON logic low voltage	V_{ENL}				0.4	V
Thermal shutdown threshold	T_{SD}			165		°C
Thermal shutdown hysteresis	ΔT_{SD}			30		°C

*1: For CC (Constant Current) mode, please refer to Start-up Characteristics.

*2 *3 *4 *5: Please refer to reverse current protection mode

Start-up Characteristics

Constant slope circuit is included in the WL2817 to prevent the overshoot of the output voltage. If inrush current increases due to the large capacitance of C_{out} , the operation mode will be shift from Constant Slope (CS) mode to Constant Current (CC) mode. The CC mode maintains a constant inrush current. In the CC mode, t_{on} varies with the size of C_{out} and the load current.

Reverse Current Protection Circuit

The WL2817 include a Reverse Current Protection Circuit, which stop the reverse current from V_{out} pin to V_{in} pin or GND pin when V_{out} becomes higher than V_{in} .

Following figure shows the load characteristics of each mode. When giving the V_{out} pin a constant voltage and decreasing the V_{in} voltage, the V_{in} voltage will become lower than $V_{out}-V_{rev_det}$, the reverse current protection starts to function to stop the load current. By increasing the V_{in} voltage higher than $V_{out}-V_{rev_rel}$, the protection mode will be released to let the load current to flow. When V_{in} voltage is between V_{out} and V_{rev_det} , the parasitic diode between V_{in} pin and V_{out} pin becomes forward direction. As a result, the current flows from V_{out} pin to V_{in} pin, and the maximum of the current is I_{revmax} .



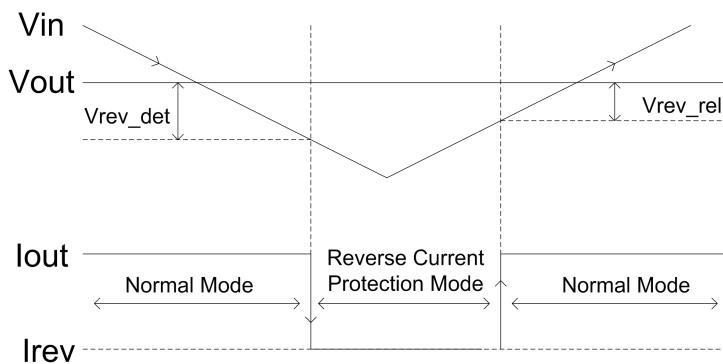


Figure1.Detection/Release Threshold value of Reverse Current Protection

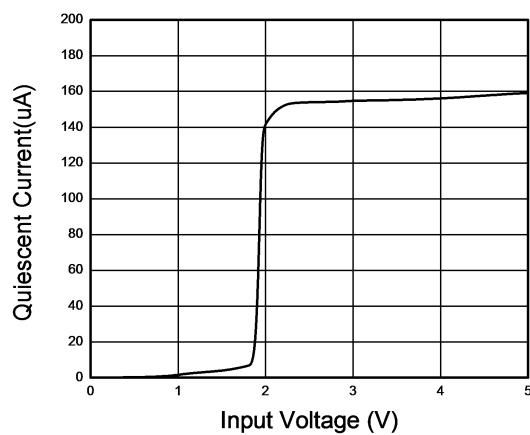
Typical characteristics (Ta=25°C, V_{IN}=4V, V_{out}=3V, C_{IN}=4.7uF, C_{OUT}=1uF, unless otherwise noted)




Quiescent current vs. Supply voltage

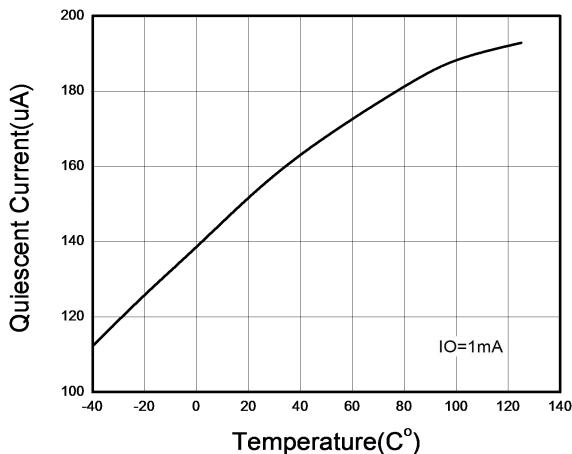


Quiescent current vs. Temperature

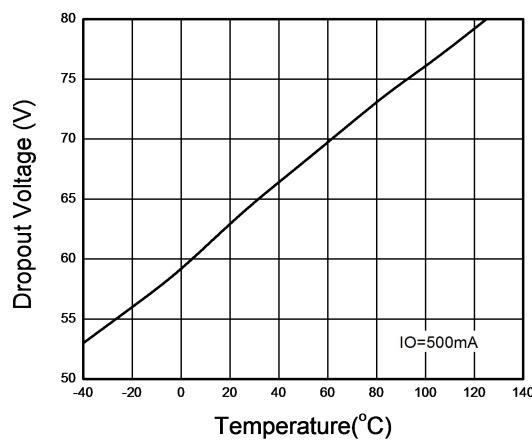


DROP Voltage vs. Temperature

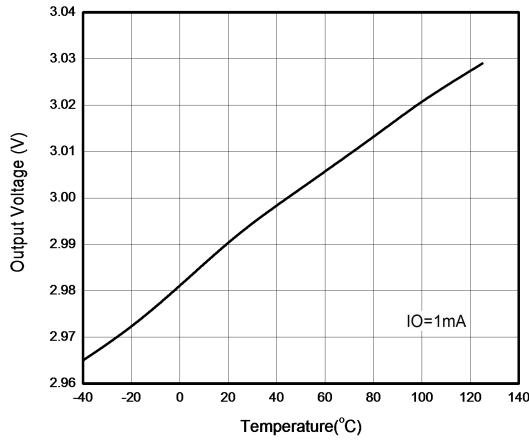





Output Voltage vs. Temperature

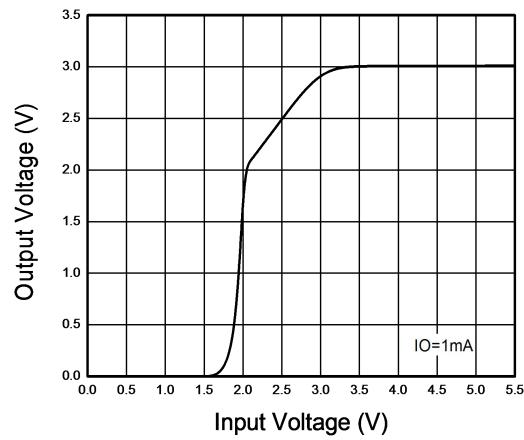

Output voltage vs. Supply voltage

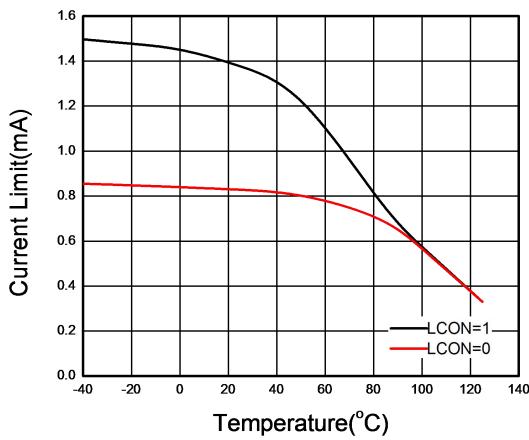

Current Limit vs. Temperature

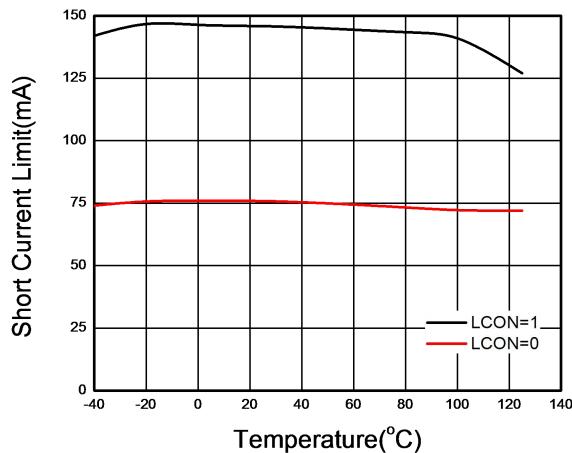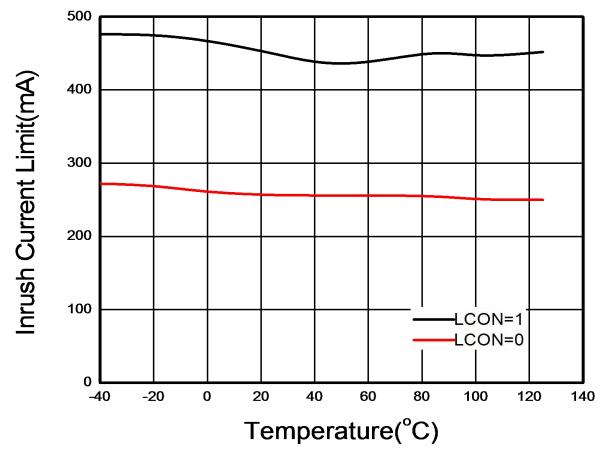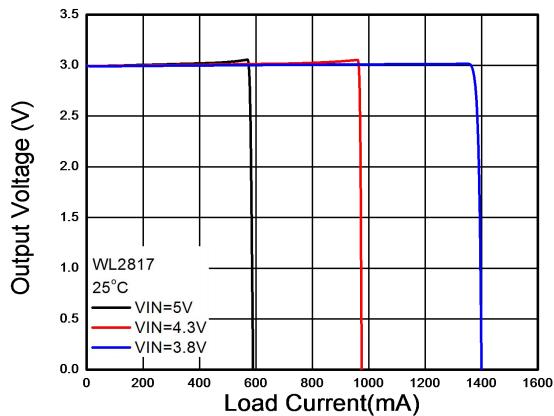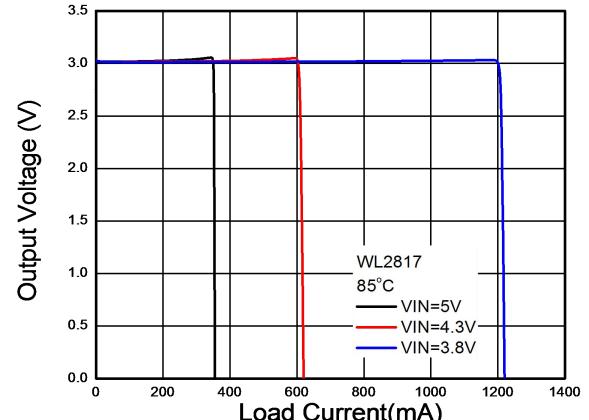

Short Current Limit vs. Temperature

Inrush Current Limit vs. Temperature

Output Voltage vs. Load Current

Output Voltage vs. Load Current

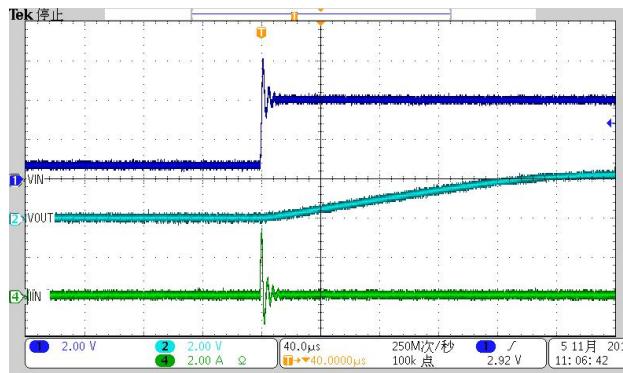1. Start up

A: 不同负载电阻启动

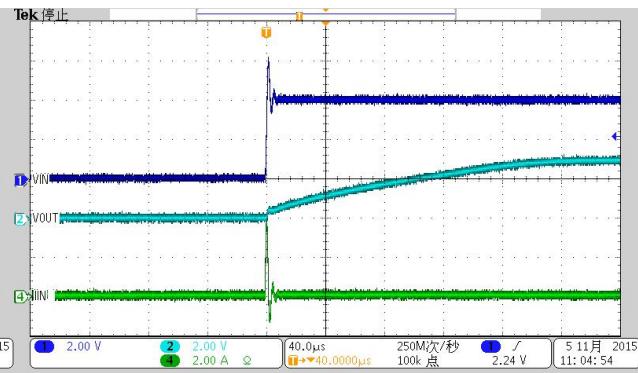
LCON=0

VIN=4V, IO=0mA




LCON=1


VIN=4V, IO=0mA




VIN=4V, IO=100mA

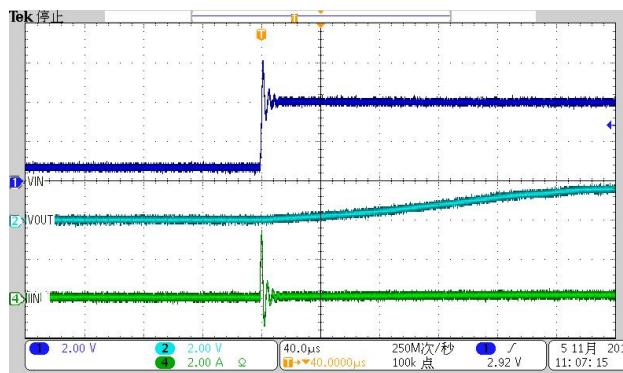


VIN=4V, IO=100mA






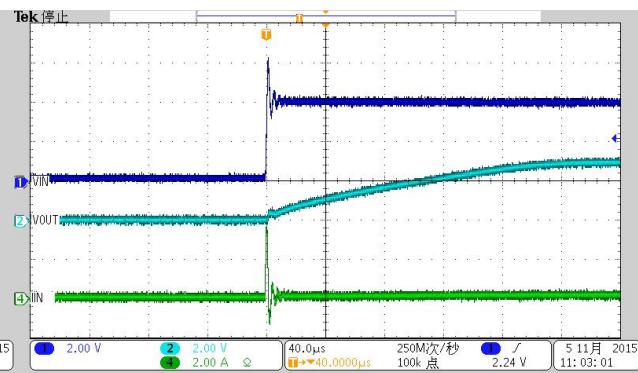








VIN=4V, IO=300mA

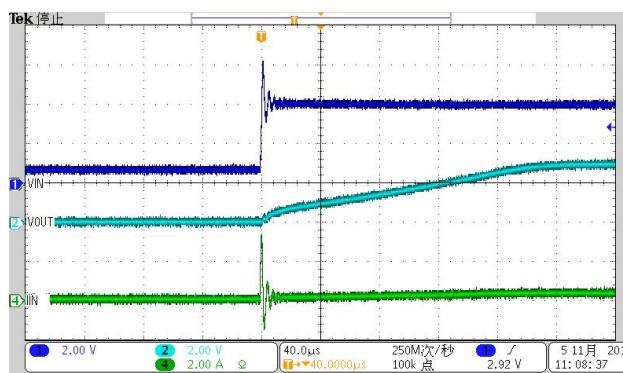



VIN=4V, IO=600mA

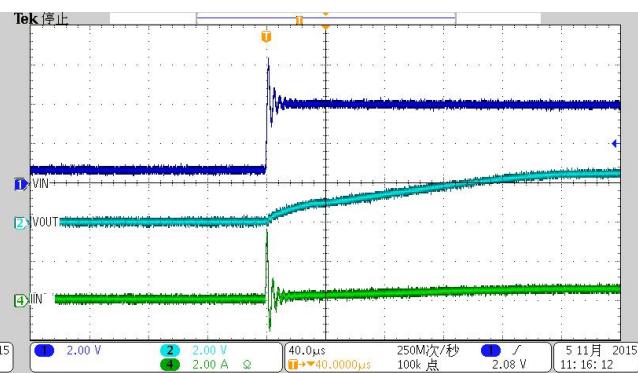

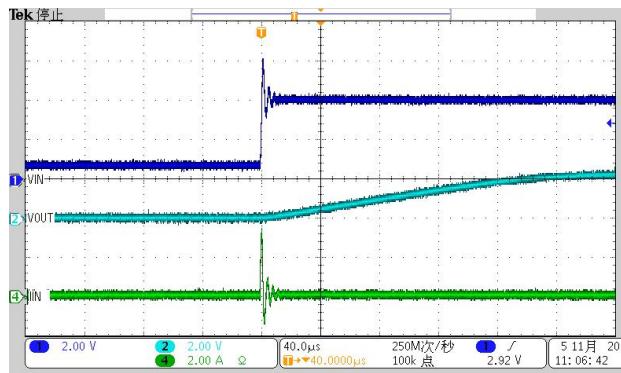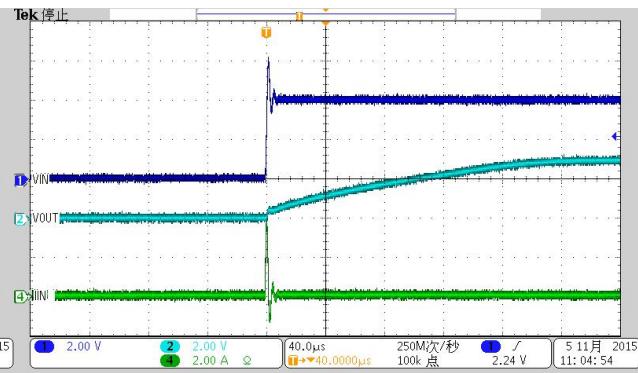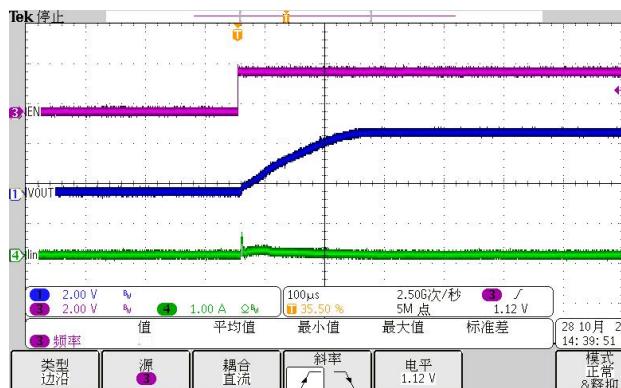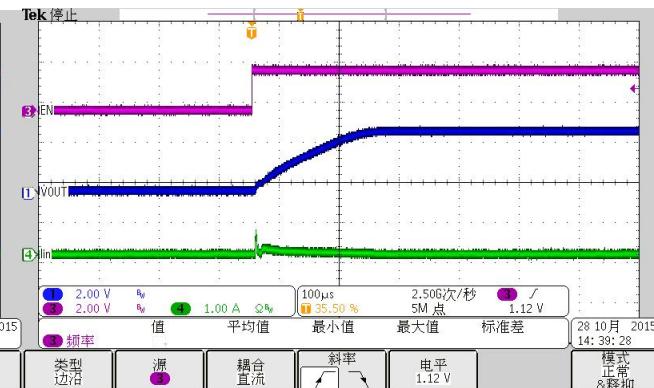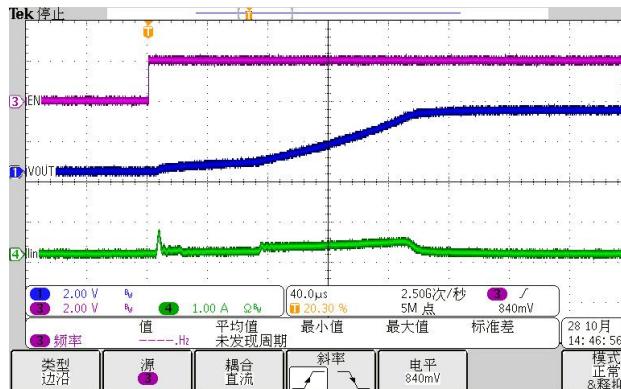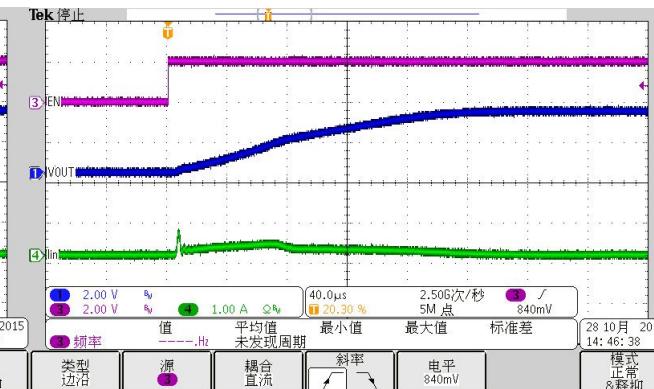
B: 不同的负载电容启动
LCON=0
VIN=4V, COUT=1uF

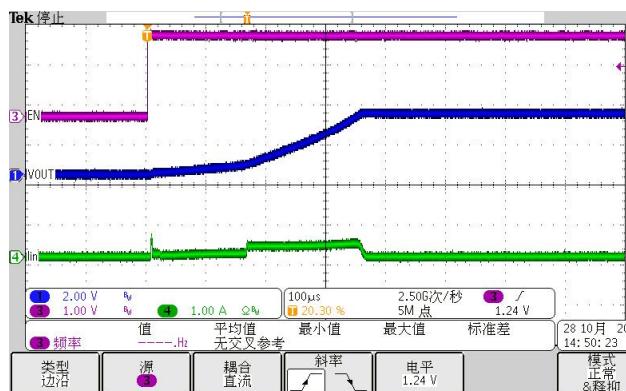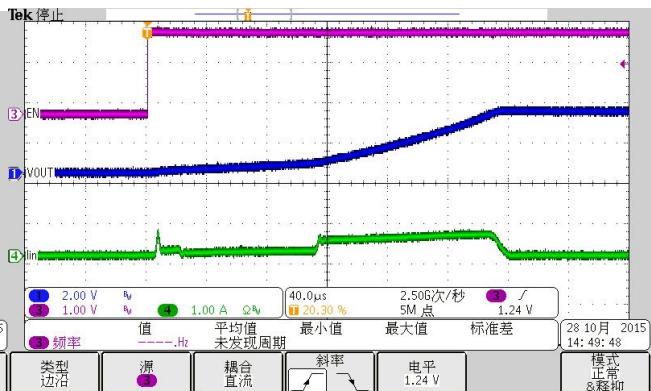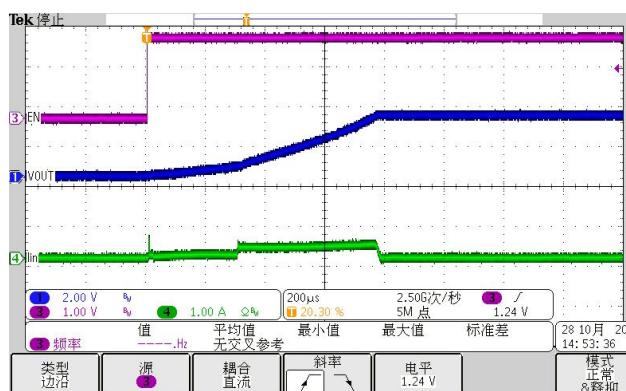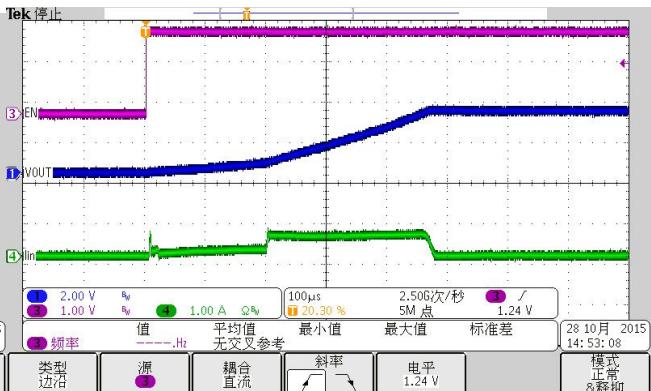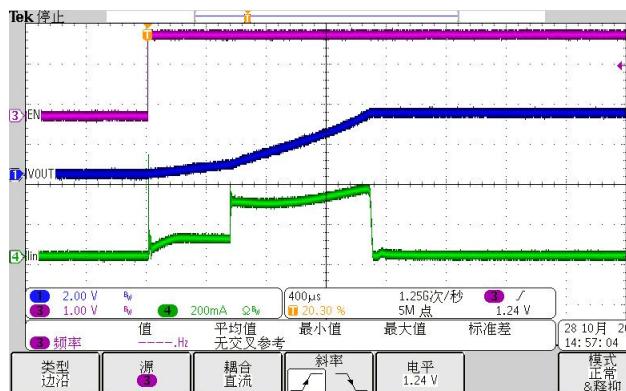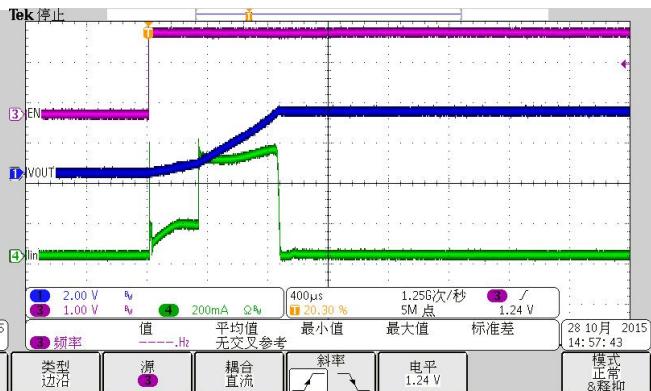LCON=1
VIN=4V, COUT=1uF

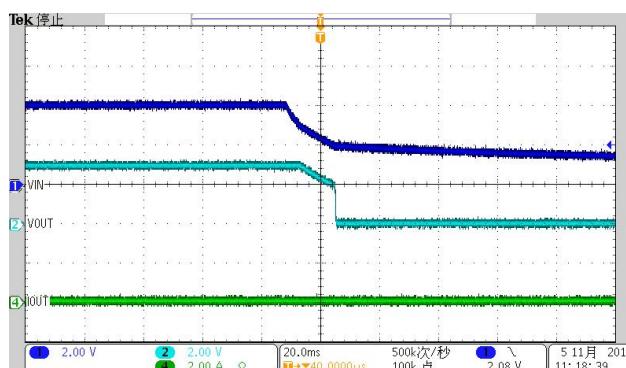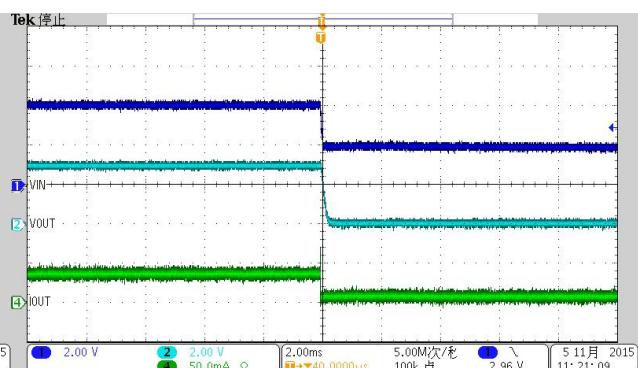VIN=4V, COUT=4.7uF

VIN=4V, COUT=4.7uF

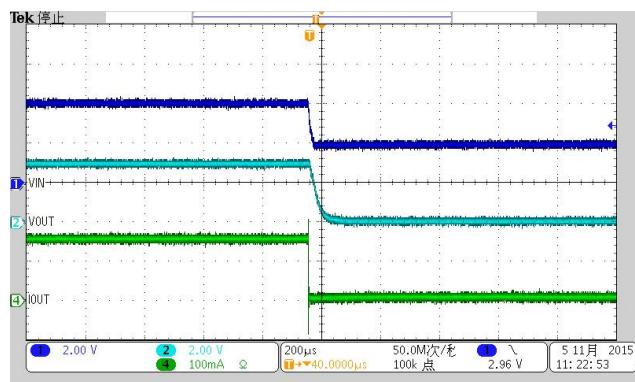VIN=4V, COUT=10uF

VIN=4V, COUT=10uF


VIN=4V, COUT=22uF

VIN=4V, COUT=22uF

VIN=4V, COUT=47uF

VIN=4V, COUT=47uF

VIN=4V, COUT=100uF

VIN=4V, COUT=100uF


2. Shut down

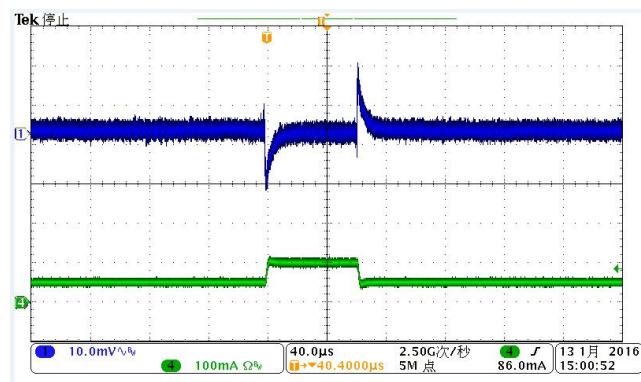
VIN=4V, IO=0mA

VIN=4V, IO=30mA


VIN=4V, IO=150mA




3.Load Step


VIN=4V, IO=50mA-100mA



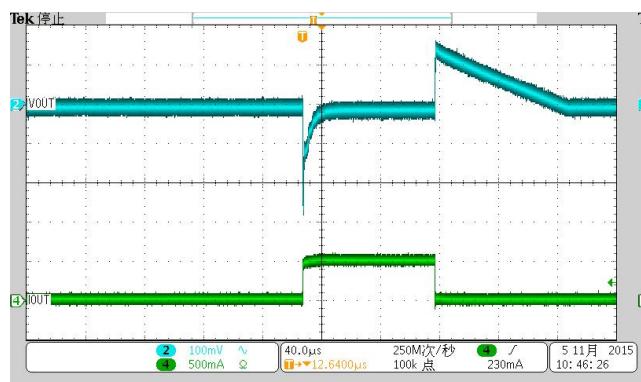
VIN=4V, IO=1mA-250mA



VIN=4V, IO=1mA-250mA

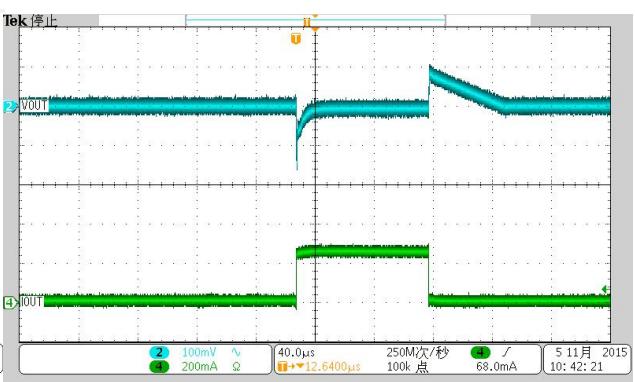


VIN=4V, IO=1mA-500mA

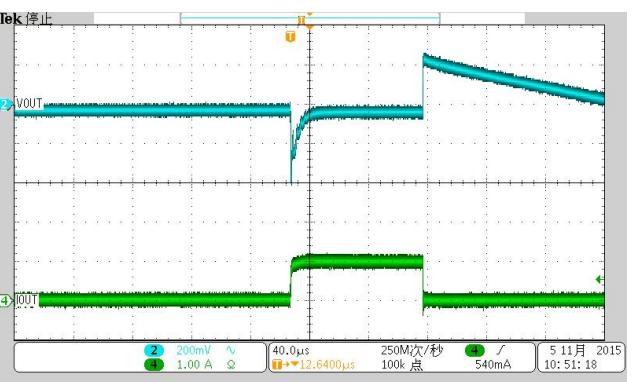


4.LCON Step

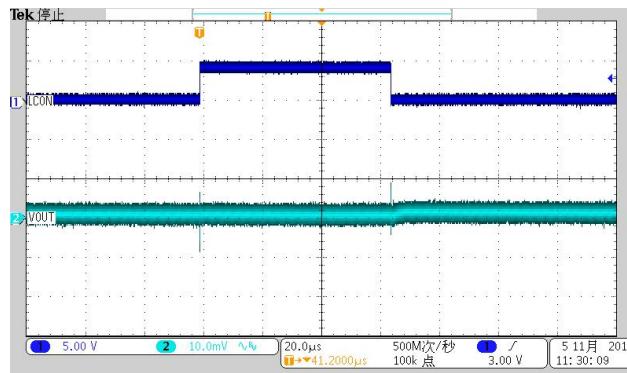
VIN=4V, IO=0mA





VIN=4V, IO=150mA

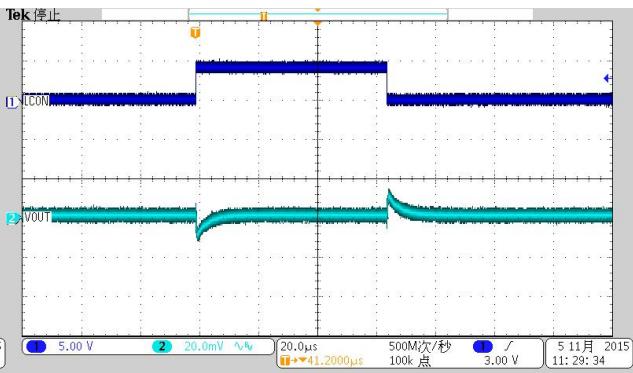

VIN=4V, IO=500mA

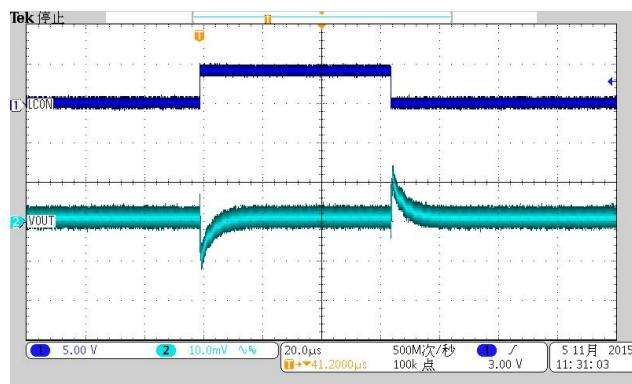

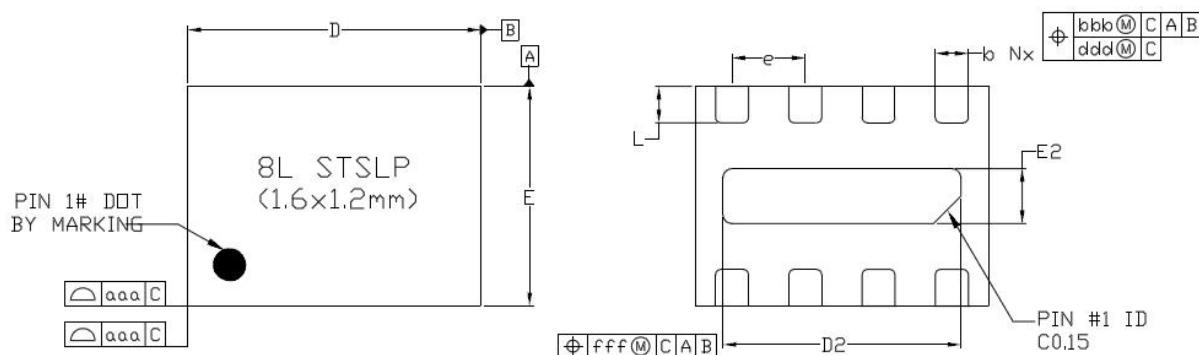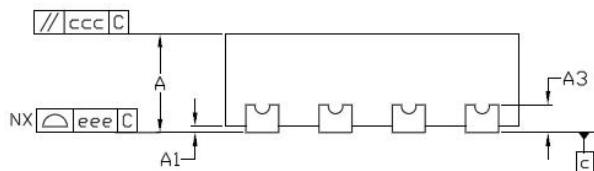Package outline dimensions
DFN1612-8L

TOP VIEW
BOTTOM VIEW

SIDE VIEW
Notes

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER JEDEC MO-220.

Symbol	Dimensions in millimeter		
	Min.	Typ.	Max.
A	0.500	0.550	0.600
A1	---	---	0.050
A3		0.152 REF.	
D	1.550	1.600	1.650
E	1.150	1.200	1.250
D2	1.250	1.300	1.350
E2	0.250	0.300	0.350
--		--	
b	0.130	0.180	0.230
e		0.400 BSC	
L	0.150	0.200	0.250
Tol. Of Form&Position			
aaa		0.10	
bbb		0.10	
ccc		0.10	
ddd		0.05	
eee		0.08	
fff		0.10	

ORDER INFORMATION

Ordering No.	V _{OUT} (V)	Package	Marking	Operating Temperature	Shipping
WL2817DA33-8/TR	3.3	DFN1612-8L	I*	-40 ~ +85°C	3000/Tape and Reel
WL2817DA30-8/TR	3.0	DFN1612-8L	B*	-40 ~ +85°C	3000/Tape and Reel
WL2817DA10-8/TR	1.0	DFN1612-8L	C*	-40 ~ +85°C	3000/Tape and Reel
WL2817DA18-8/TR	1.8	DFN1612-8L	D*	-40 ~ +85°C	3000/Tape and Reel
WL2817DA28-8/TR	2.8	DFN1612-8L	E*	-40 ~ +85°C	3000/Tape and Reel