

WSB5518W

Middle Power Schottky Barrier Diode

[Http://www.sh-willsemi.com](http://www.sh-willsemi.com)

Features

- 0.5 A Average rectified forward current
- Low forward voltage, low leakage current
- Small package SOD-323




SOD-323

Applications

- Switching circuit
- Middle current rectification



Circuit



Absolute maximum ratings

Marking

Parameter	Symbol	Value	Unit
Reverse voltage (repetitive peak)	V _{RRM}	60	V
Reverse voltage (DC)	V _R	60	V
Average rectified forward current	I _O	0.5	A
Peak forward surge current ⁽¹⁾	I _{FSM}	7	A
Junction temperature	T _J	125	°C
Operating temperature	T _{opr}	-40 ~ 85	°C
Storage temperature	T _{stg}	-55 ~ 150	°C

Electronics characteristics (T_A=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward voltage ⁽²⁾	V _F	I _F =0.5A	-	0.5	0.55	V
Reverse current	I _R	V _R =60V	-	4	100	uA
Junction capacitance	C _J	V _R =4V, F=1MHz	-	34		pF
Thermal resistance ⁽³⁾	R _{θJL}	Junction to Lead		108	135	K/W

Order Informations

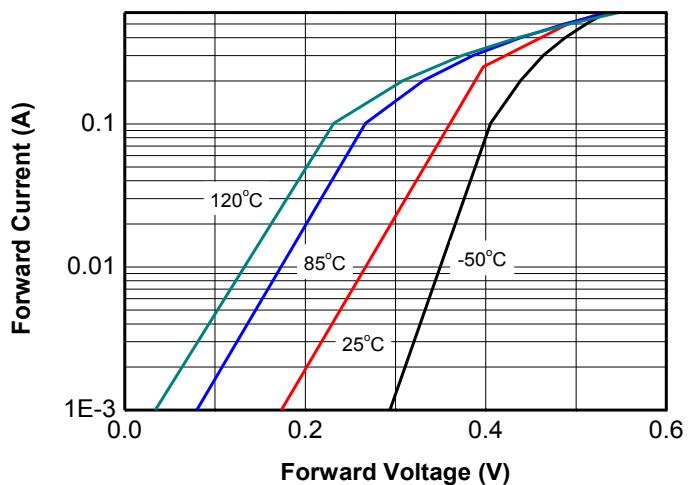
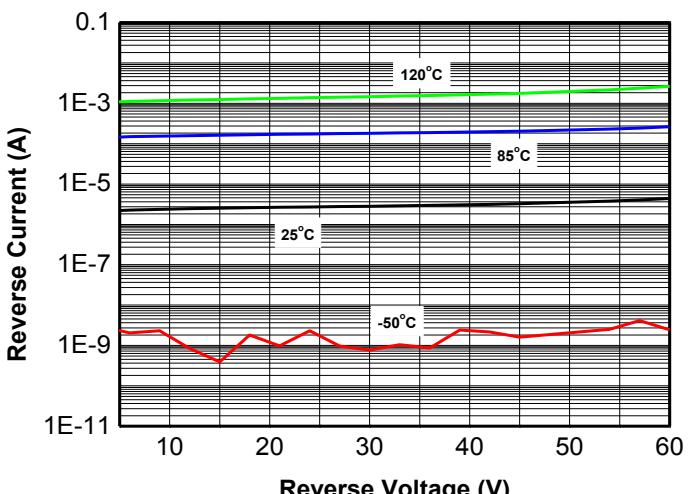
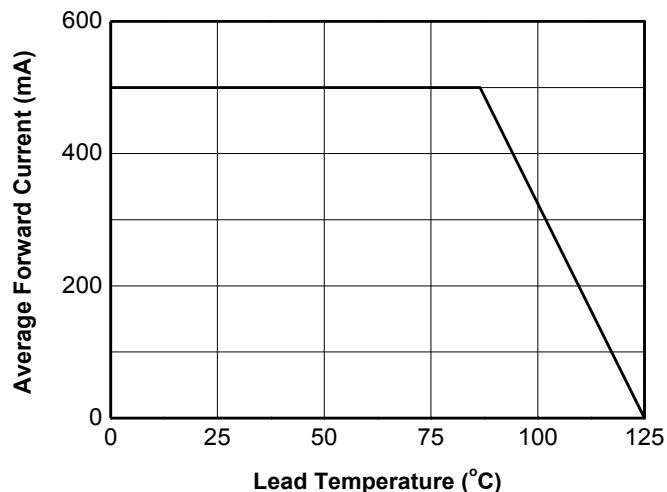
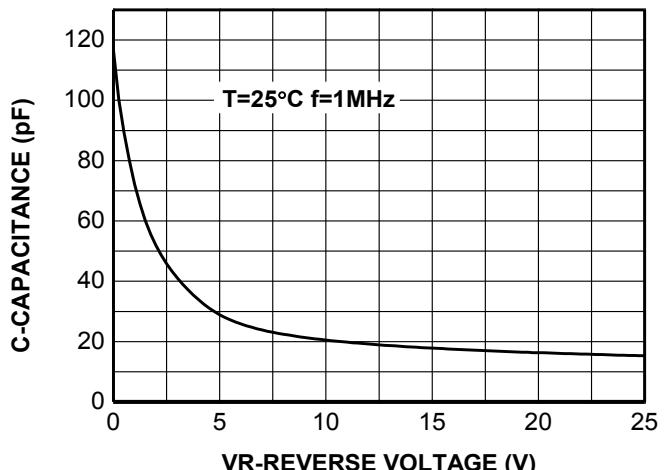
Device	Package	Marking	Shipping
WSB5518W-2/TR	SOD-323	*8 ⁽⁴⁾	3000/Reel&Tape

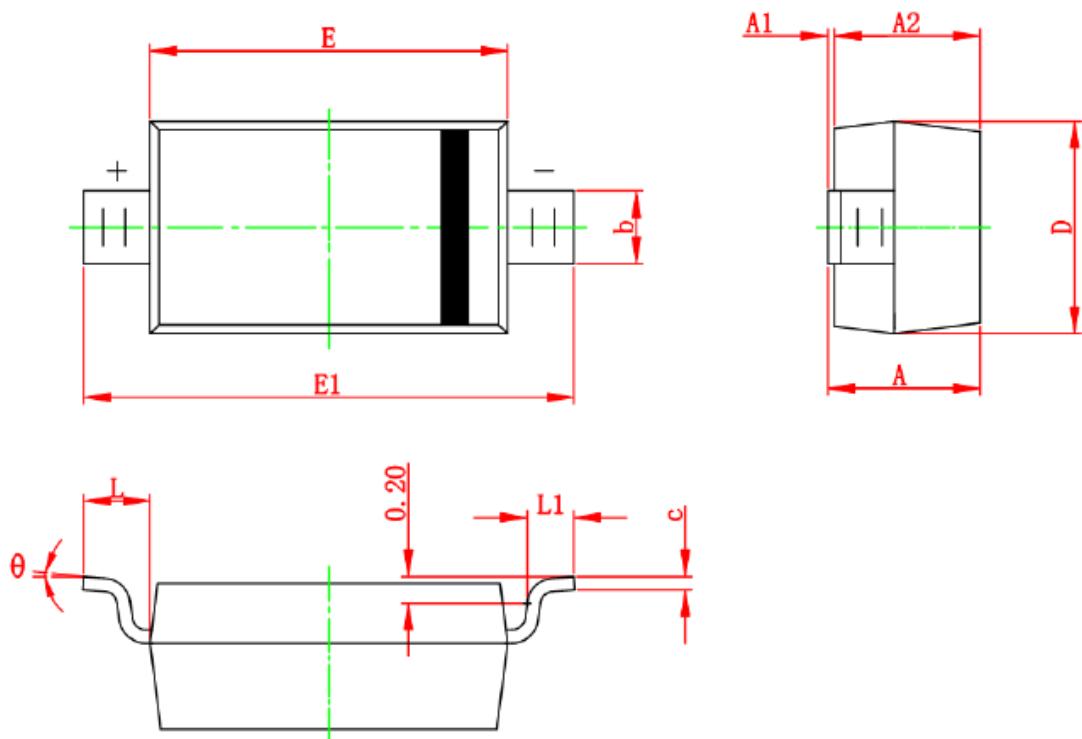
Note 1 : Pulse Width=8.3ms, Single Pulse;

Note 2 : Single Pulse test tp=380us;

Note 3 : Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

Note 4 : * = Month code (A~Z); 8 = Device code;

Typical characteristics (Ta=25°C, unless otherwise noted)

Fig.1 Forward voltage vs. Forward current

Fig.2 Reverse current vs. Reverse voltage

Fig.3 Forward Current Derating

Fig.4 Junction capacitance vs. Reverse voltage

Package outline dimensions
SOD-323


Symbol	Dimensions in millimeters		Dimensions in inches	
	Min.	Max.	Min.	Max.
A		1.000		0.039
A1	0.000	0.100	0.000	0.004
A2	0.800	0.900	0.031	0.035
b	0.250	0.350	0.010	0.014
c	0.080	0.150	0.003	0.006
D	1.200	1.400	0.047	0.055
E	1.600	1.800	0.063	0.071
E1	2.500	2.700	0.098	0.106
L	0.475 (REF)		0.019 (REF)	
L1	0.250	0.450	0.010	0.018
θ	0°	8°	0°	8°