

Silicon Bridge Rectifiers

2W005--2W10

FEATURES

- Rating to 1000V PRV
- Surge overload rating to 50 Amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- Surge overload rating to 50 Amperes peak 94V-O
- Glass passivated chip junctions



Lead-free

Maximum Ratings (@T_A = 25°C unless otherwise specified)

Characteristic	Symbol	2W005	2W01	2W02	2W04	2W06	2W08	2W10	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward Output current @T _A =25°C	I _{F(AV)}	2.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I _{FSM}	50.0							A

Thermal Characteristics

Characteristic	Symbol	2W005	2W01	2W02	2W04	2W06	2W08	2W10	UNITS
Operating junction temperature range	T _J	- 55 ---- + 125							°C
Storage temperature range	T _{STG}	- 55 ---- + 150							°C

Electrical Characteristics (@T_A = 25°C unless otherwise specified)

Characteristic	Symbol	2W005	2W01	2W02	2W04	2W06	2W08	2W10	UNITS
Maximum instantaneous forward voltage @1.0A	V _F	1.1							V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =100°C	I _R	5.0 0.5							μ A m A



Silicon Bridge Rectifiers

2W005--2W10

PACKAGE OUTLINE DIMENSIONS

WOM		
Dim	Min	Max
A	Ø 8.70	Ø 9.10
B	5.00	5.60
E	Ø0.60	Ø0.80
F	23.0min (长) \ 18.50min (短)	
F1	2.0min	
K	4.70	5.30
All Dimensions in mm		

PACKAGE INFORMATION

Device	Package	Shipping
2W005--2W10	WOM	1000Units/Box



Silicon Bridge Rectifiers

2W005--2W10

FIG.1 -- PEAK FORWARD SURGE CURRENT

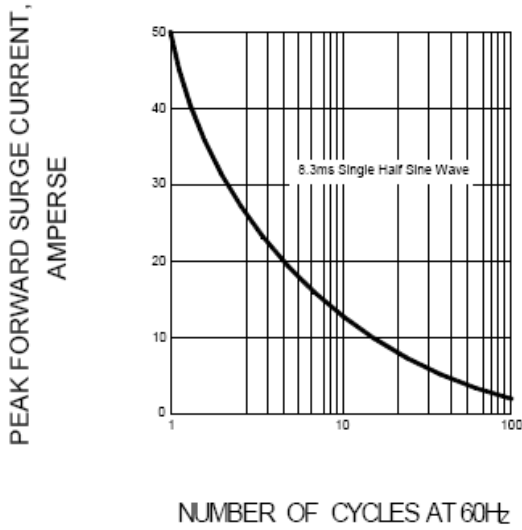


FIG.2 -- FORWARD DERATING CURVE
OUTPUT RECTIFIED CURRENT

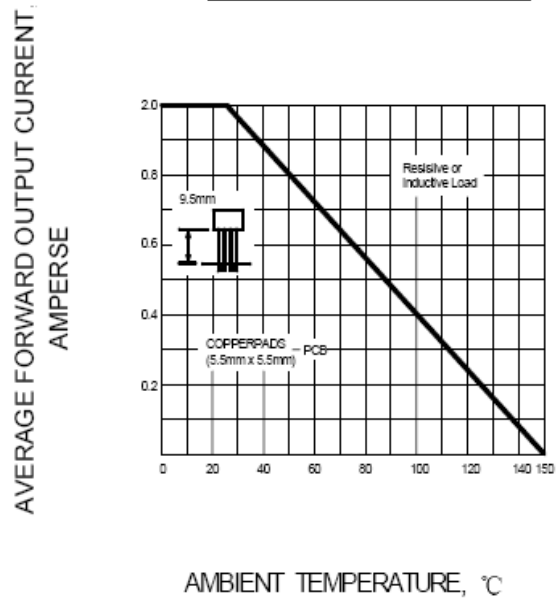


FIG.3 -- TYPICAL FORWARD CHARACTERISTIC

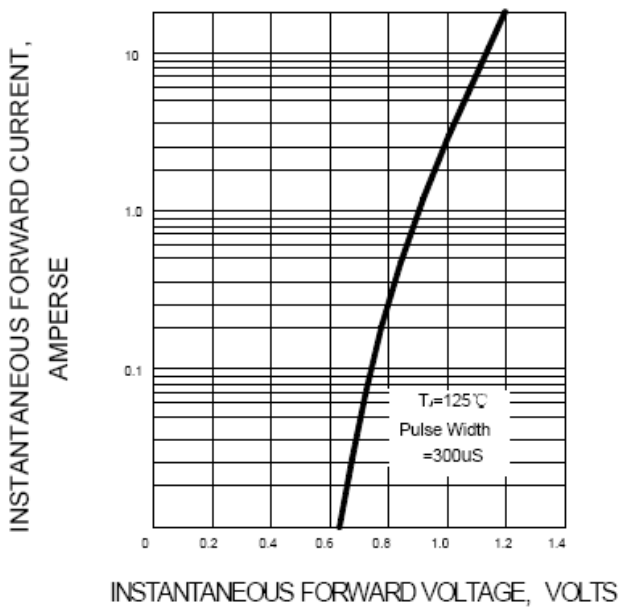


FIG.4 -- TYPICAL REVERSE CHARACTERISTIC

