

## 6W STEREO POWER AMPLIFIER—YD1519B


### DESCRIPTION

The YD1519B is an integrated class-B dual output amplifier in a 9-lead single in-line (SIL) plastic medium power package. The device is primarily developed for car radio applications.

### FEATURES

- \*Requires very few external components for Bridge Tied Load (BTL), Stereo or BTL application;
- \*High output power, Fixed gain, Good ripple rejection;
- \* Identical inputs (inverting and non-inverting), Low offset voltage at output (important for BTL);
- \*Mute/stand-by switch, No switch-on/switch-off plop;
- \*Load dump protection, AC and DC short-circuit-safe to ground and  $V_{cc}$ , Thermally protected;
- \*Reverse polarity safe;
- \*Capability to handle high energy on outputs ( $V_{cc}=0V$ );
- \*Protected against electrostatic discharge.

### BLOCK DIAGRAM

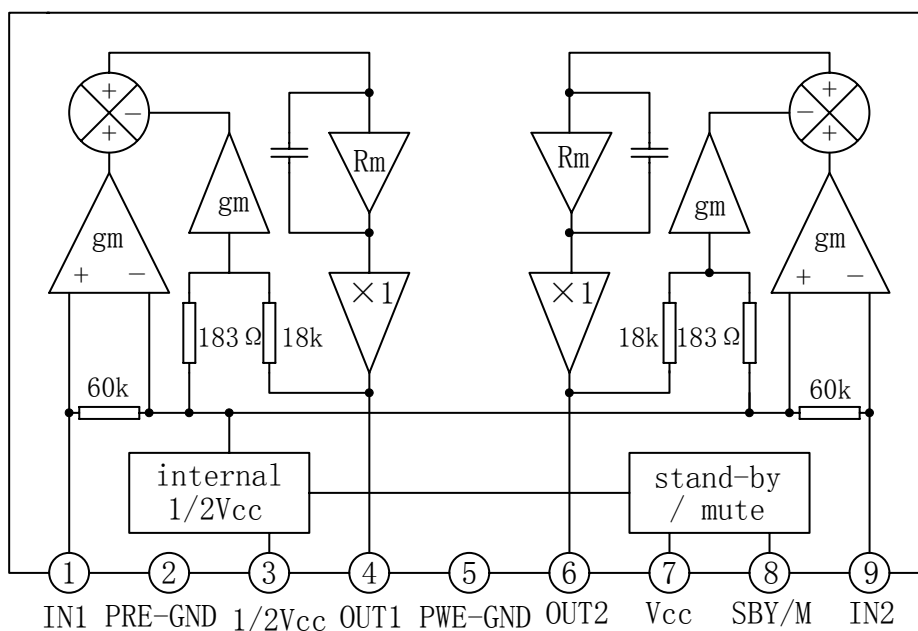

### WuXi YouDa Electronics Co., Ltd

Add: No.5 Xijin Road, National Hi-Tech Industrial Development Zone, Wuxi Jiangsu China  
 Tel: 86-510-85205117 86-510-85205106 Fax: 86-510-85205110 Website: www.e-youda.com  
 SHENZHEN OFFICE Tel: 86-755-83740369 Fax: 86-755-83741418

**ABSOLUTE MAXIMUM RATINGS** ( $T_{amb}=25^{\circ}\text{C}$ )

PARAMETER	SYMBOL	TEST CONDITIONS	VALUE	UNIT
Supply Voltage Operating	V <sub>cc</sub>		18	V
Non-operating	V <sub>cc</sub>		30	V
Load Dump Protected	V <sub>cc</sub>	During 50 ms; $t_r \geq 2.5\text{ms}$	45	V
AC And DC Shot-circuit-safe Voltage	V <sub>ccsc</sub>		18	V
Reverse Polarity	V <sub>ccr</sub>		6	V
Non-repetitive Peak Output Current	I <sub>OSM</sub>		4	A
Repetitive Peak Output Current	I <sub>ORM</sub>		2.5	A
Total Power Dissipation	P <sub>D</sub>	Infinite Heat Sink	15	W
		No Heat Sink	3.0	
Operating Temperature	T <sub>opr</sub>		-20~+75	°C
Storage Temperature	T <sub>stg</sub>		-55~+150	°C

**ELECTRICAL CHARACTERISTICS****DC CHARACTERISTICS**(V<sub>cc</sub>=14.4V, T<sub>amb</sub>=25°C, stereo, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage Range	V <sub>cc</sub>		6.0	14.4	18.0	V
Total Quiescent Current	I <sub>ccq</sub>			40	80	mA
DC Output Voltage	V <sub>o</sub>			7.0		V
DC Output Offset Voltage	$ \Delta V_{4-6} $	Operating/Mute			250	mV
Switch-on Voltage Level	V <sub>ON</sub>	Operating	8.5		V <sub>cc</sub>	V
Mute Condition	V <sub>mute</sub>	Mute	3.3		6.4	V
Stand-by Condition	V <sub>st-by</sub>	Stand-by	0		2.0	V
DC Current in Stand-by	I <sub>ccsb</sub>	V <sub>8</sub> ≤ 2.0V			100	μ A
Control Current in Stand-by	I <sub>8sb</sub>	V <sub>8</sub> ≤ 2.0V		12	40	μ A

## YOUDA INTEGRATED CIRCUIT

YD1519B

## AC CHARACTERISTICS

 $V_{CC}=14.4V$ ,  $R_L=4\ \Omega$ ,  $f=1kHz$ ;  $T_{amb}=25^\circ C$ , stereo, unless otherwise specified


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Power	$P_o$	THD=0.5%	4	5		W
		THD=10%	5.5	6.0		W
Output Power	$P_o$	$V_{CC}=13.2V$ , THD=0.5%		3.5		W
		$V_{CC}=13.2V$ , THD=10%		4.8		W
Total Harmonic Distortion	THD	$P_o=1W$		0.1		%
Output Signal In Mute Position	$V_o$	$V_{in}=1V(max.)$ ; $f=20\ Hz\ to\ 15\ kHz$			20	mV
Low Frequency Roll-off	$f_L$	-3dB		45		Hz
High Frequency Roll-off	$f_H$	-3dB	20			kHz
Closed Loop Voltage Gain	$G_v$		39	40	41	dB
Supply Voltage Ripple Rejection	RR	ON, $V_r=2V_{p-p}$ , $R_g=0$ , $f_r=100Hz$	40			dB
		ON, $V_r=2V_{p-p}$ , $R_g=0$ , $f_r=1kHz\sim 10kHz$	45			dB
		Mute, $V_r=2V_{p-p}$ , $R_g=0$ , $f_r=100Hz$ ,	45			dB
		Stand-by, $1kHz\sim 10kHz$	80			dB
Input Impedance	$Z_i$		50	60	75	$k\ \Omega$
Noise Output Voltage (RMS value)	$V_{no}$	ON, $R_g=0\ \Omega$ , BPF=20Hz~20kHz		150	500	$\mu V$
		ON, $R_s=10k\ \Omega$ BPF=20Hz~20kHz		250		$\mu V$
		Mute, BPF=20Hz~20kHz		120		$\mu V$
Channel Separation	$\alpha$	$R_s=10k\ \Omega$	40			dB
Channel Unbalance	$ \Delta G_v $			0.1	1	dB

## AC CHARACTERISTICS


(V<sub>cc</sub>=14.4V, R<sub>L</sub>=8Ω, f=1KHz, Tamb=25°C; BTL, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Power	Po	THD=0.5%	8	10		W
		THD=10%	11	12		W
Output Power	Po	V <sub>cc</sub> =13.2V , THD=0.5%		7.5		W
		V <sub>cc</sub> =13.2V , THD=10%		10		W
Total Harmonic Distortion	THD	Po =1W		0.1		%
Output Signal In Mute Position	V <sub>o</sub>	V <sub>in</sub> =1V(max.); f=20 Hz to 15 kHz			40	mV
Low Frequency Roll-off	f <sub>L</sub>	-3dB		45		Hz
High Frequency Roll-off	f <sub>H</sub>	-3dB	20			KHz
Closed Loop Voltage Gain	G <sub>v</sub>		45	46	47	dB
Supply Voltage Ripple Rejection	RR	ON, Vr=2Vp-p, Rg=0, fr=100Hz	34			dB
		ON, Vr=2Vp-p, Rg=0, fr=1kHz~10kHz	48			dB
		Mute Vr=2Vp-p, Rg=0, fr=100Hz,	48			dB
		Stand-by 1kHz~10kHz	80			dB
Input Impedance	Z <sub>i</sub>		25	30	38	kΩ
Noise Output Voltage (RMS value)	V <sub>no</sub>	ON, Rg=0Ω, BPF=20Hz~20kHz		200		μV
		ON, Rs=10kΩ BPF=20Hz~20kHz		350	700	μV
		Mute, BPF=20Hz~20kHz		180		μV

**APPLICATION CIRCUIT**

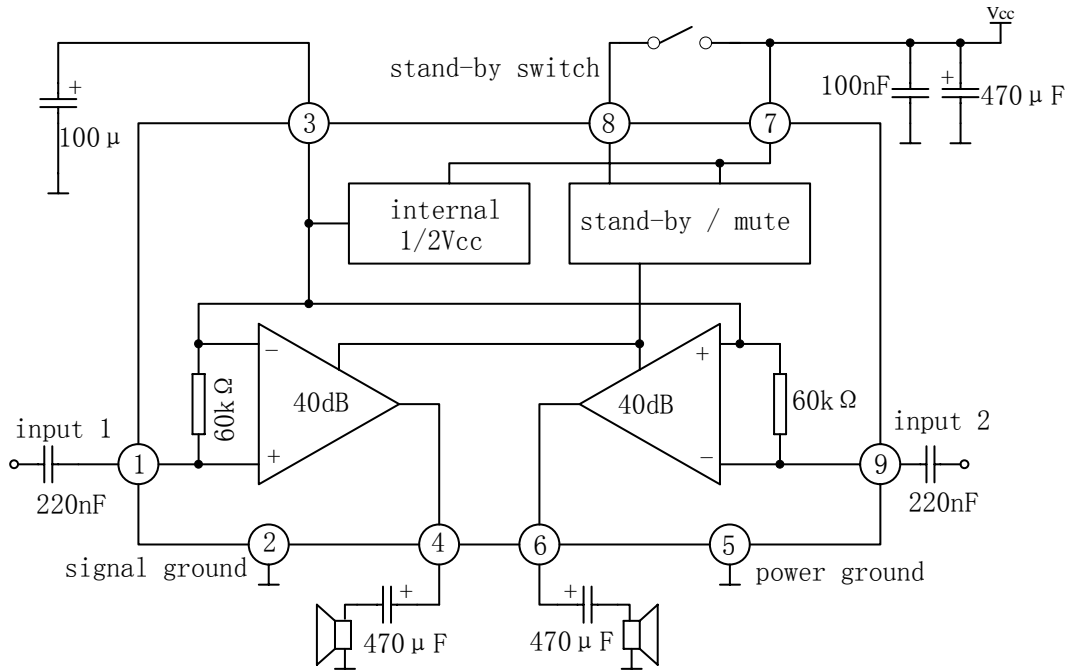

**Stereo application circuit diagram**

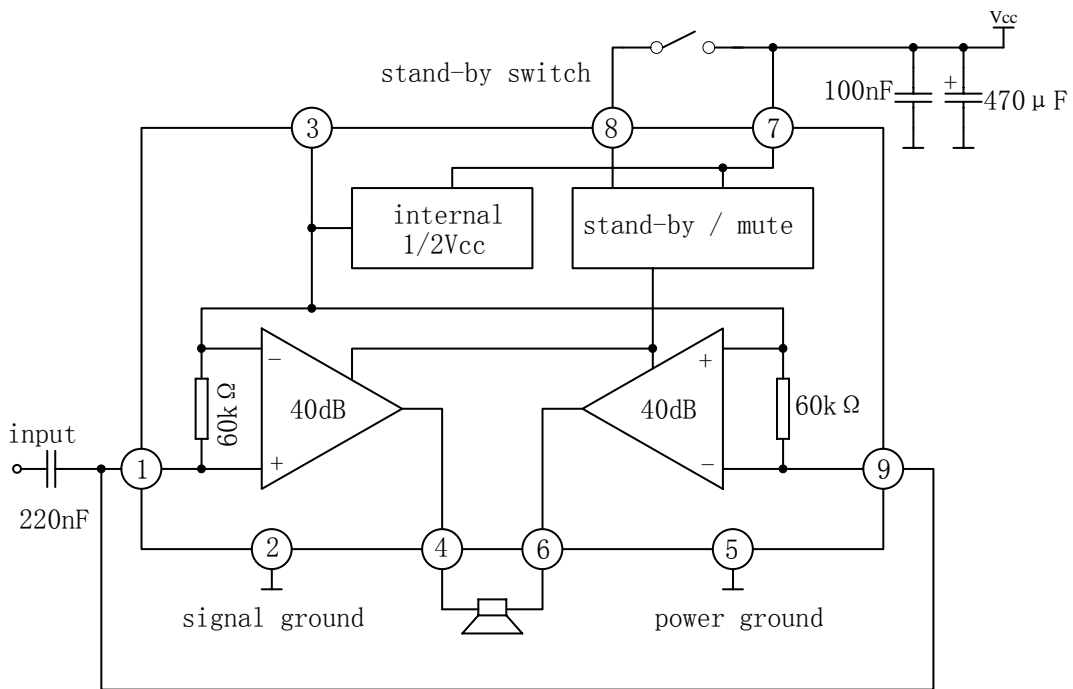

**BTL application circuit diagram**

OUTLINE DRAWING

