



## Spice Model



Z25SG



Part Number	Working Reverse Voltage (V <sub>rw</sub> )	Average Rectified Current (I <sub>o</sub> )		Reverse Current @ V <sub>rw</sub> (I <sub>r</sub> )		Forward Voltage (V <sub>f</sub> )		1 Cycle Surge Current t <sub>p</sub> =8.3ms (I <sub>fsm</sub> )	Repetitive Surge Current (I <sub>frm</sub> )	Reverse Recovery Time (3) (T <sub>rr</sub> )	Thermal Impedance J-L			Junction Cap. @50VDC @ 1kHz (C <sub>j</sub> )
		55°C(1)	100°C(2)	25°C	100°C	25°C		25°C	25°C	25°C	25°C	L=.000	L=.125	L=.250
	Volts	Amps	Amps	μA	μA	Volts	Amps	Amps	Amps	ns	°C/W	°C/W	°C/W	pF
Z25SG	2500	1.50	1.0	1.0	25	5.5	2.0	60	10	3000	3	6	12	20

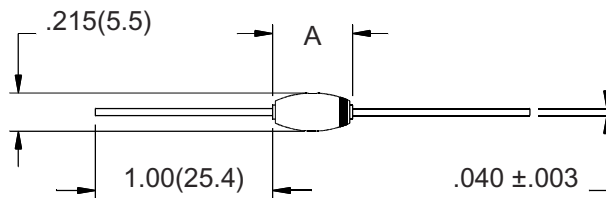

Part	A
Z25SG	.350(8.89) MAX.
Z50SG	
Z100SG	.400(10.16) MAX

<b>I<sub>s</sub></b>	Reverse leakage current	5.0E-07	Amps
<b>N</b>	Emission coefficient	8.6	
<b>T</b>	Temperature	25	C
<b>RS</b>	Diode series resistance	.005	Ohm
<b>TT</b>	Transit time	3000	nS
<b>C<sub>J0</sub></b>	Zero-bias junction capacitance	33.69	pF
<b>VJ</b>	Bulk junction potential	4.47	Volts
<b>M</b>	Grading coefficient	0.5	
<b>EG</b>	Energy-band gap	1.11	Volts
<b>XTI</b>	Temperature coefficient	3	
<b>KF</b>	Flicker-noise coefficient	0	
<b>AF</b>	Flicker-noise exponent	1	
<b>FC</b>	Coefficient for capacitance	0.5	
<b>BV</b>	Diode breakdown voltage	3600	Volts
<b>IBV</b>	Diode breakdown current	100	uAmps



**Voltage Multipliers, Inc.**  
8711 W. Roosevelt Ave.  
Visalia, CA 93291

Tel (559) 651-1402  
Fax (559) 651-0740  
www.voltagemultipliers.com