

# Coaxial-Ceramic Resonator Filters and Multiplexers

50Ω

DC to 6 GHz

## The Big Deal

- Low insertion loss with excellent power handling
- Passbands up to 6 GHz
- Fractional bandwidth from 3 to 25%
- Excellent temperature stability
- Rugged construction to handle demanding environmental conditions



## Product Overview

Mini-Circuits' *Coaxial-Ceramic Resonator filters* offer low insertion loss in very small form factors, using ceramic material with high dielectric constant and superior Q factor. Bandpass and bandstop filters, diplexer and multiplexer designs can be constructed using this technology. Low insertion loss combined with excellent power handling makes these filters well suited for transmitter and receiver signal chains. Advanced filter design and construction can achieve stopband width greater than 3x the center frequency

All our coaxial-ceramic resonator filters are built with rugged construction, qualified to withstand multiple demanding reflow cycles. Custom integrated assembly with LNA greatly simplifying system integration. They can be realized in small form factors with high-quality, precise machining for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

## Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in signal chain
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stop band	Wide spur-free stopband results in better receiver sensitivity
Excellent power handling	Well suited for transmitter applications
Rugged Construction	These filter assemblies have been qualified over a wide range of thermal, mechanical and environmental conditions including withstanding the stress of extensive solder reflow cycles
Small Size	Very well suited for high performance applications where size is a constraint.
Temperature stability	Very minimal change in electrical performance across temperature makes these filters suitable for a wide range of operating conditions.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Bandpass Filter

## ZX75BP-1350+

50Ω 1300 to 1400 MHz



CASE STYLE: HY1238  
 Connectors Model  
**SMA-MF** ZX75BP-1350-S+


### Features

- Low insertion loss
- High selectivity
- Connectorized package


### Applications

- Traffic collision avoidance system (TCAS)
- Aeronautical radio navigation
- Fixed satellite
- Radio astronomy
- Radar and navigation system

### Functional Schematic

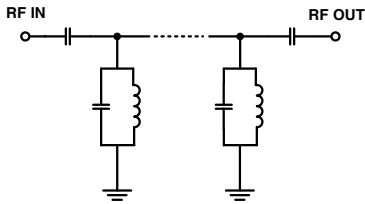

### Typical Frequency Response



### Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
<b>Pass Band</b>	Center Frequency	-	-	1350	-	MHz
	Insertion Loss	F1-F2	1300-1400	1.1	2	dB
	VSWR	F1-F2	1300-1400	1.3	-	:1
<b>Stop Band, Lower</b>	Insertion Loss	DC-F3	DC - 1125	20	40	dB
	VSWR	DC-F3	DC - 1125	-	20	:1
<b>Stop Band, Upper</b>	Insertion Loss	F4-F5	1665-2800	20	30	dB
	VSWR	F4-F5	1665-2800	-	20	:1

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input*	5 W max.





\* Passband rating, derate linearly to 3.5W at 85°C ambient. Permanent damage may occur if any of these limits are exceeded.

### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1	98.98	3832.97	1300	5.42
500	68.95	260.23	1305	5.24
1000	55.39	80.29	1310	5.09
1125	39.21	55.42	1315	4.96
1159	30.02	45.63	1320	4.85
1195	20.14	31.51	1325	4.76
1225	11.24	14.88	1330	4.68
1255	3.59	3.53	1335	4.61
1300	1.09	1.07	1340	4.55
1350	0.98	1.13	1345	4.50
1400	1.00	1.16	1350	4.46
1455	3.03	3.44	1355	4.43
1500	9.55	14.94	1360	4.40
1572	20.22	45.46	1365	4.39
1665	30.58	62.76	1370	4.38
1700	34.04	65.48	1375	4.38
1800	44.94	69.60	1380	4.39
2000	46.52	75.03	1385	4.41
2500	37.71	78.33	1390	4.45
2800	37.33	70.42	1400	4.54

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

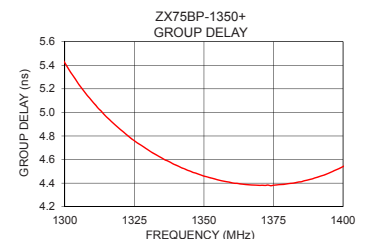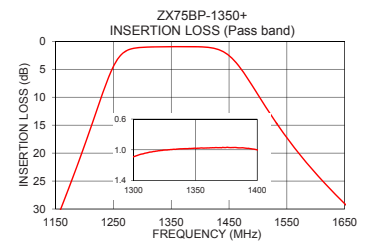

### Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Coaxial Connections

INPUT	SMA-MALE
OUTPUT	SMA-FEMALE

## Outline Drawing

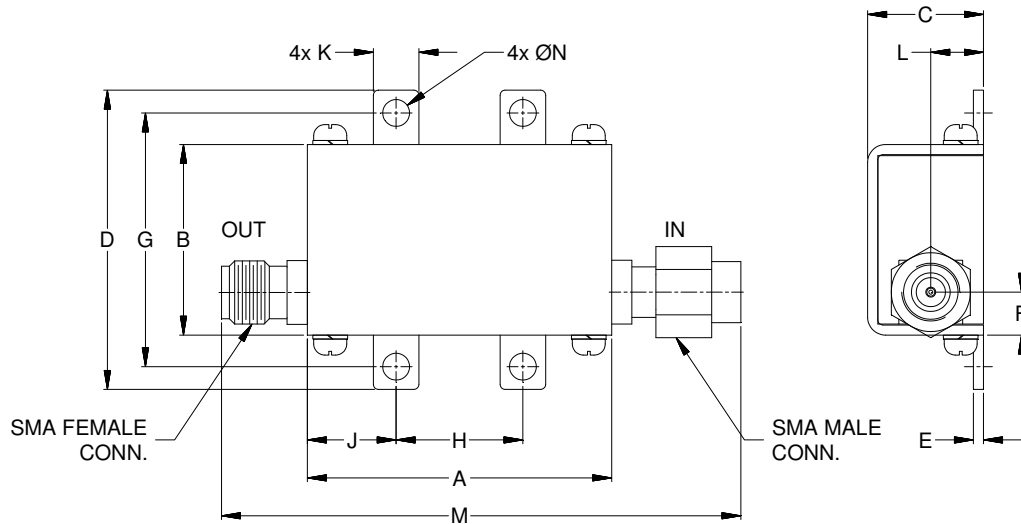

## Outline Dimensions ( $\frac{\text{inch}}{\text{mm}}$ )

A	B	C	D	E	F	G
<b>1.20</b>	<b>.75</b>	<b>.46</b>	<b>1.18</b>	<b>.04</b>	<b>.17</b>	<b>1.00</b>
30.48	19.05	11.68	29.97	1.02	4.32	25.40
H	J	K	L	M	N	Wt.
<b>.50</b>	<b>.35</b>	<b>.18</b>	<b>.21</b>	<b>2.05</b>	<b>.106</b>	grams
12.70	8.89	4.57	5.28	52.07	2.69	35.0

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

