

RMS LEVEL SENSOR FOR dbx NOISE REDUCTION SYSTEM

DESCRIPTION


The μ PC1253H2 is dbx noise reduction system RMS (Root Mean Square) level sensor, used in tape deck and other audio equipment.

The μ PC1253H2 features high accurate RMS level sensor for wide input due to NEC's super low noise and high h_{FE} PNP process.

Since the package is 8 pin SIP, it can be built in a compact set.

PACKAGE DIMENSIONS

in millimeters (inches)

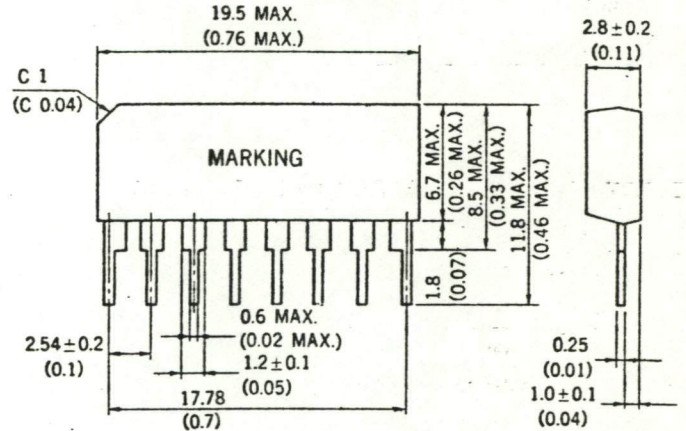

FEATURES


- Wide operating supply voltage
- Excellent linearity Control Constant
- Wider input range

$$V_{CC} = \pm 4 \text{ to } \pm 15 \text{ V (TYP. } \pm 12 \text{ V)}$$

$$V_C = 5.9 \text{ mV/dB}$$

$$v_{in} = -40 \text{ dBV to } +10 \text{ dBV}$$

FUNCTIONAL BLOCK DIAGRAM

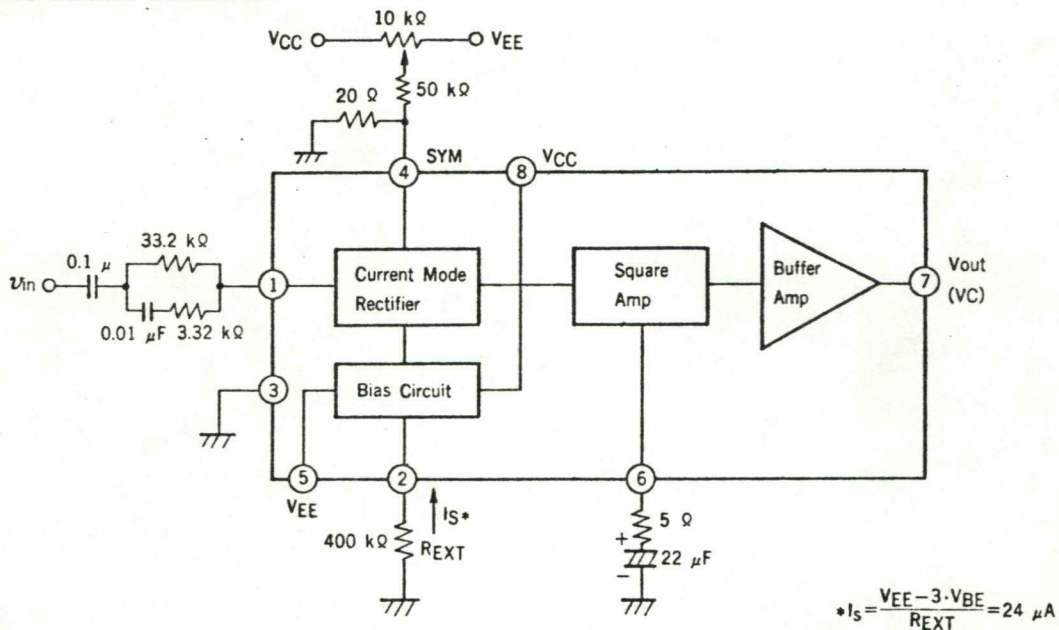

$$I_S = \frac{V_{EE} - 3 \cdot V_{BE}}{R_{EXT}} = 24 \mu A$$

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

Supply Voltage	V_{CC}, V_{EE}	± 15	V
Supply Current	I_{CC}	30	mA
Power Dissipation	P_D	330*	mW
Operating Temperature Range	T_{opt}	-20 to +75	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-40 to +125	$^\circ\text{C}$

* Value at $T_a = 75^\circ\text{C}$


RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Operating Supply Voltage	V_{CC}, V_{EE}	± 4	± 12	± 15	V
Input Level Range	v_{in}	-40		+10	dBV
Bias Current	I_s		24		μA

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}, V_{CC} = +12\text{V}, V_{EE} = -12\text{V}, f = 1\text{kHz}, Z_{in} = 33\text{k}\Omega$)


CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Supply Current	I_{CC}		0.9	2.0	mA	No Signal
Output Level	V_O^*	111	136	161	mV	$V_{IN} = 0\text{ dBV}$
Control Constant	V_C	5.8	5.9	6.1	mV/dB	$v_{in} = -40\text{ dBV to } +10\text{ dBV}$

* Output Level is defined as follows.

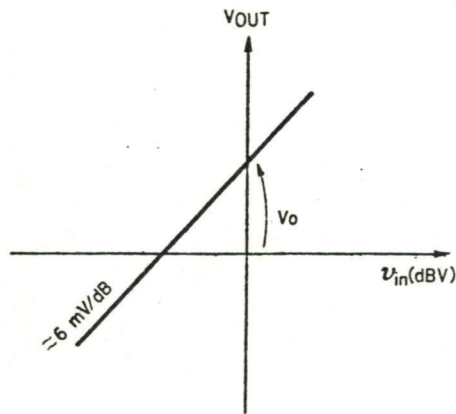


TEST CIRCUIT

(1) I_{CC}

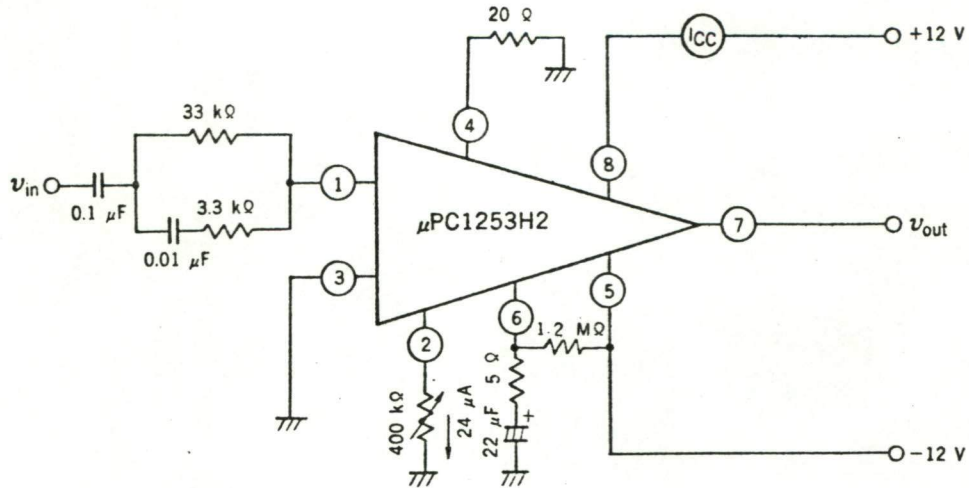


(2) V_O, V_C

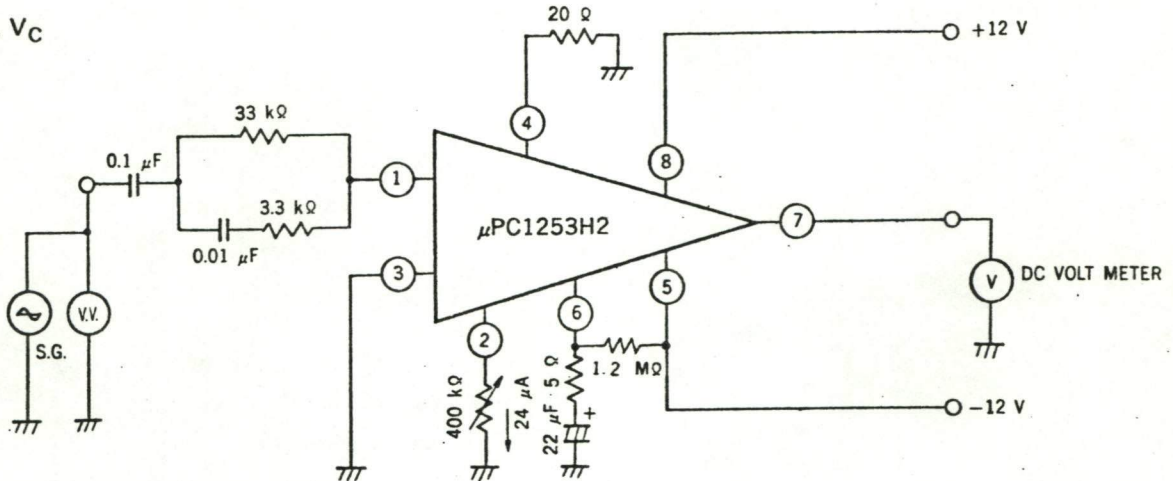

Note for use



1. Since $\mu\text{PC1253H2}$ is designed for dbx Noise Reduction System, recommend to use $\mu\text{PC1253H2}$ with $\mu\text{PC1252H2}$ (VCA) in case of composing dbx NR system.
2. Documents issued by dbx incorporated have priority over NEC, such as application note or data about dbx NR system.

APPLICATION CIRCUIT

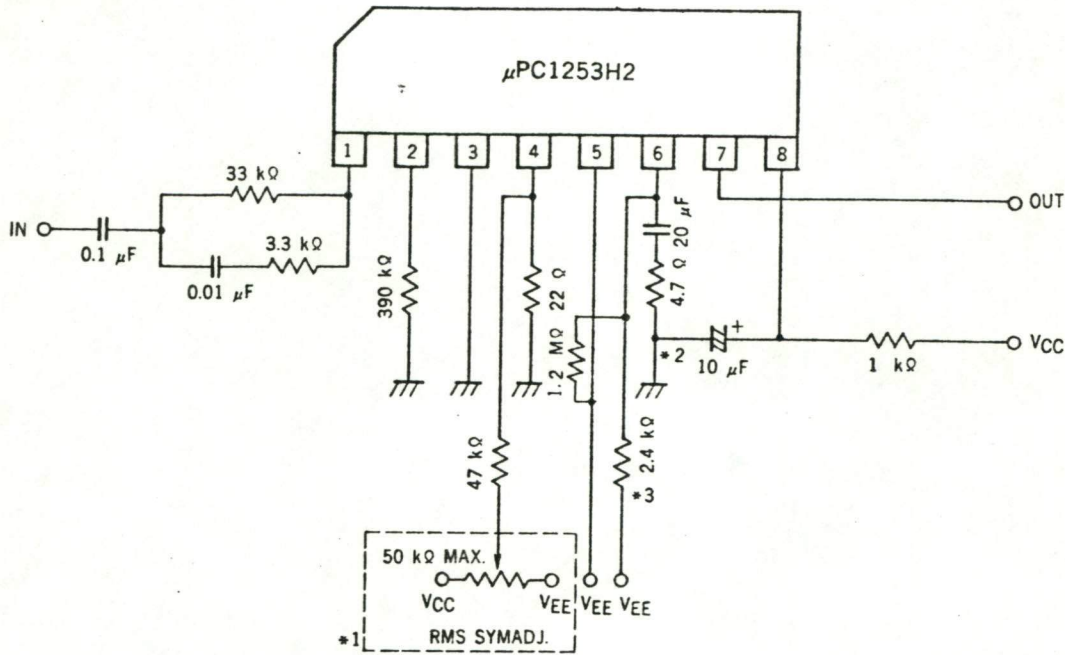

- *1. Possible to omit RMS SYM.ADJ. in case of using this IC with $\mu\text{PC1252H2}$ at T.H.D. $\geq 0.05\%$.
 - *2. Make GND common about these terminals.
 - *3. This resistor is for RMS time constant.
- Connect 7 PIN OUT to GC1 of $\mu\text{PC1252H2}$ (VCA).

TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

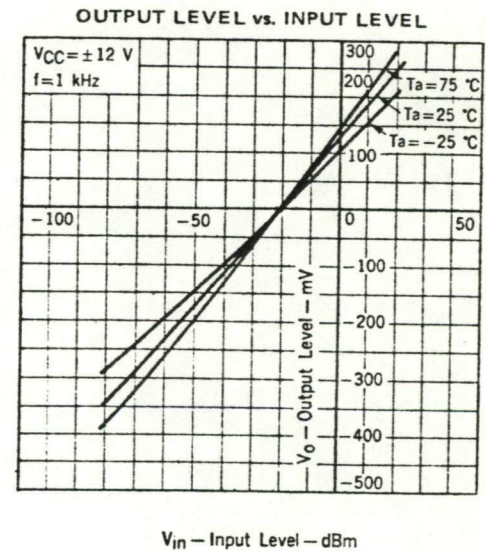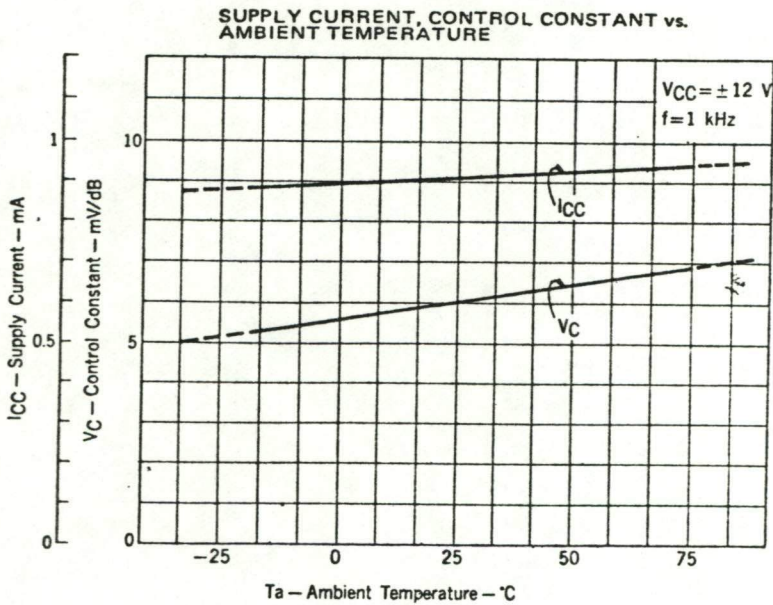

Nippon Electric Co., Ltd.

NEC Building, 33-1, Shiba Gocho, Minato-ku, Tokyo 108, Japan
 Tel: Tokyo 454-1111
 Telex Address: NECTOK J22686
 Cable Address: MICROPHONE TOKYO

IC-1432
 FEB.-25-82M
 Printed in Japan