




# Stamped Dual Wipe Contact DIP Sockets 300C Series

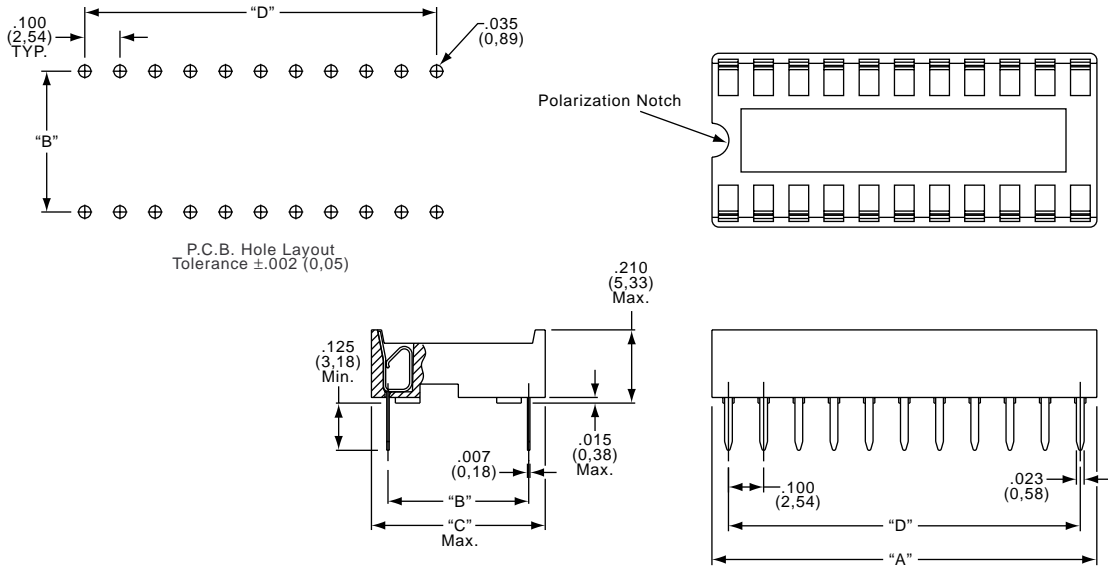

## STANDARD CONFIGURATIONS/PART NUMBERS

| Part Number  | Number of Contacts | A             | B*                        | C            | D             | Part Number | Number of Contacts | A             | B*                         | C            | D             |
|--------------|--------------------|---------------|---------------------------|--------------|---------------|-------------|--------------------|---------------|----------------------------|--------------|---------------|
| 306-AG19DC * | 6                  | .300 (7,62)   | .300 ± .005 (7,62 ± 0,13) | .400 (10,16) | .200 (5,08)   | 324-AG19DC  | 24                 | 1.200 (30,48) | .600 ± .005 (15,24 ± 0,13) | .700 (17,78) | 1.100 (27,94) |
| 308-AG19DC * | 8                  | .400 (10,16)  |                           |              | .300 (7,62)   | 324-1G7 *   | 24                 | 1.200 (30,48) |                            |              | 1.100 (27,94) |
| 314-AG19DC * | 14                 | .700 (17,78)  |                           |              | .600 (15,24)  | 328-AG19DC  | 28                 | 1.400 (35,56) |                            |              | 1.300 (33,02) |
| 316-AG19DC * | 16                 | .800 (20,32)  |                           |              | .700 (17,78)  | 328-1G7 *   | 28                 | 1.400 (35,56) |                            |              | 1.300 (33,02) |
| 318-AG19DC * | 18                 | .900 (22,86)  |                           |              | .800 (20,32)  | 332-AG19DC  | 32                 | 1.600 (40,64) |                            |              | 1.500 (38,10) |
| 320-AG19DC * | 20                 | 1.000 (25,40) |                           |              | .900 (22,86)  | 332-1G7 *   | 32                 | 1.600 (40,64) |                            |              | 1.500 (38,10) |
| 324-AG10DC * | 24                 | 1.200 (30,48) |                           |              | 1.100 (27,94) | 340-AG19DC  | 40                 | 2.000 (50,80) |                            |              | 1.900 (48,26) |
| 328-AG10DC   | 28                 | 1.400 (35,56) |                           |              | 1.300 (33,02) | 340-1G7 *   | 40                 | 2.000 (50,80) |                            |              | 1.900 (48,26) |
| 328-10G7 *   | 28                 | 1.400 (35,56) |                           |              | 1.300 (33,02) | 342-AG19DC  | 42                 | 2.100 (53,34) |                            |              | 2.000 (50,80) |
| 332-AG10DC   | 32                 | 1.600 (40,64) |                           |              | 1.500 (38,10) |             |                    |               |                            |              |               |

\* Denotes Open Frame Design

| Part Number | Number of Contacts | A             | B*                         | C            | D             |
|-------------|--------------------|---------------|----------------------------|--------------|---------------|
| 322-AG19DC  | 22                 | 1.100 (27,94) | .400 ± .005 (10,16 ± 0,13) | .500 (12,70) | 1.000 (25,40) |

Open Frame

Ladder



328-10G7



328-AG10DC

Need more technical information?

Contact your local ABE office or  
<http://www.AboveBoardElectronics.com>