

**Part Number: 3570 1333**  
**Instrumentation Grade SIP - 1 Form A**  
**Product Data Sheet**

## PICTURE



**✓RoHS Compliant**

## FEATURES


- High Reliability Instrumentation Grade reed switch with sputtered Ruthenium contacts.
- SIP 1 Form A - 10 W dry reed relays
- Ideal for test and instrumentation applications.
- High Insulation Resistance :  $10^{12} \Omega$  MIN
- Molded thermoset industry standard package.
- Optional internal coil suppression diode.
- UL File E358613

## ORDERING INFORMATION


Series	Coil	Options
3570.1333.	05	1 = no diode
	12	3 = with diode

**Part Number Example:** 3570.1333.xxx  
 3570.1333.051 = 5 volt coil, no diode

## SCHEMATIC

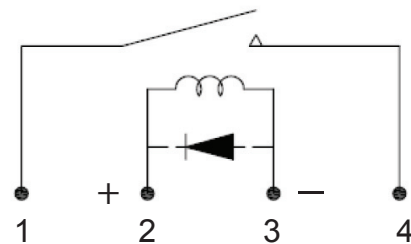

## DIMENSIONS

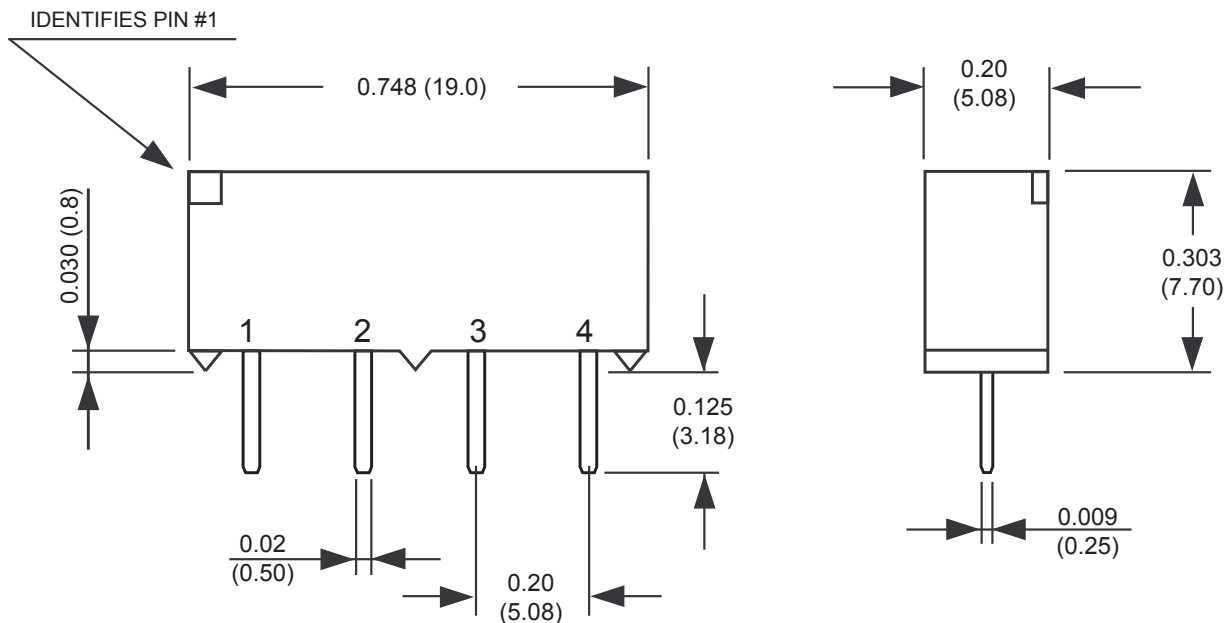

Drawings not to scale.  
 All dimensions in inches (mm) nominal.

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

**Phone: (1) 973 777 6900**

**www.comus-intl.com**

**Fax: (1) 973 777 8405**

Belgium: + 32 (0)12 390400 - Comus Europe Ltd (Assemtech) UK: +44 (0) 1255 862236 - Germany: +49 (0)911 923 15 943 - Netherlands: +31(0)45 54 39 345 - India: +(91) (44) 43219090

©2015 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA

**Part Number: 3570 1333**  
**Instrumentation Grade SIP - 1 Form A**  
**Product Data Sheet**

<b>COIL DATA-STANDARD TYPE 1 FORM A (at 20°C)</b>				
NOMINAL COIL VOLTAGE (VDC)	NOMINAL COIL RESISTANCE ±10% (Ω)	MAX OPERATE VOLTAGE (VDC)	MIN RELEASE VOLTAGE (VDC)	MAX COIL VOLTAGE (VDC)
5	500	3.75	0.8	7
12	1000	9	1	16

<b>CONTACT RATING</b>	
Max Switching Power	10 W
Max Switching Voltage	200 VDC
Max Switching Current	0.5 A
Max Carry Current	1.5 A

<b>SPECIFICATION</b>	
Contact Resistance (Initial)	MAX 150 mΩ
Operate Time - including bounce (Typical)	0.35 ms (At Nominal Voltage)
Release Time (Typical)	0.1 ms
Insulation Resistance @ 100V, 20°C, 40% RH (MIN)	10 <sup>12</sup> Ω
Dielectric Strength (MIN)	Between Open Contacts 200 V DC / peak AC Between Coil to Contacts 1500 V DC / peak AC
Capacitance Between Open Contacts (Typical)	0.5 pF
Vibration	20G
Shock	50G
Operating Temperature	-40° +85°C
Storage Temperature	-40° +100°C
Life Expectancy of Electrical	1000 x 10 <sup>6</sup> ops (1 VDC, 10mA)

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

**Phone: (1) 973 777 6900**      **www.comus-intl.com**      **Fax: (1) 973 777 8405**

Belgium: + 32 (0)12 390400 - Comus Europe Ltd (Assemtch) UK: +44 (0) 1255 862236 - Germany: +49 (0)911 923 15 943 - Netherlands: +31(0)45 54 39 345 - India: +(91) (44) 43219090

©2015 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA