



SSC8138GT8

N-Channel Enhancement Mode MOSFET

- **Features**


VDS	VGS	RDSon TYP	ID
25V	±20V	4.8mR@10V	55A
		6mR@4V5	

- **Applications**

- Desktop Computer
- Notebook

- **Pin Configuration**


Top View



- **General Description**

This device uses advanced trench technology to provide excellent RDS(ON) and low gate charge. This device is suitable for use as a load switch or in PWM applications.

- **Package Information**

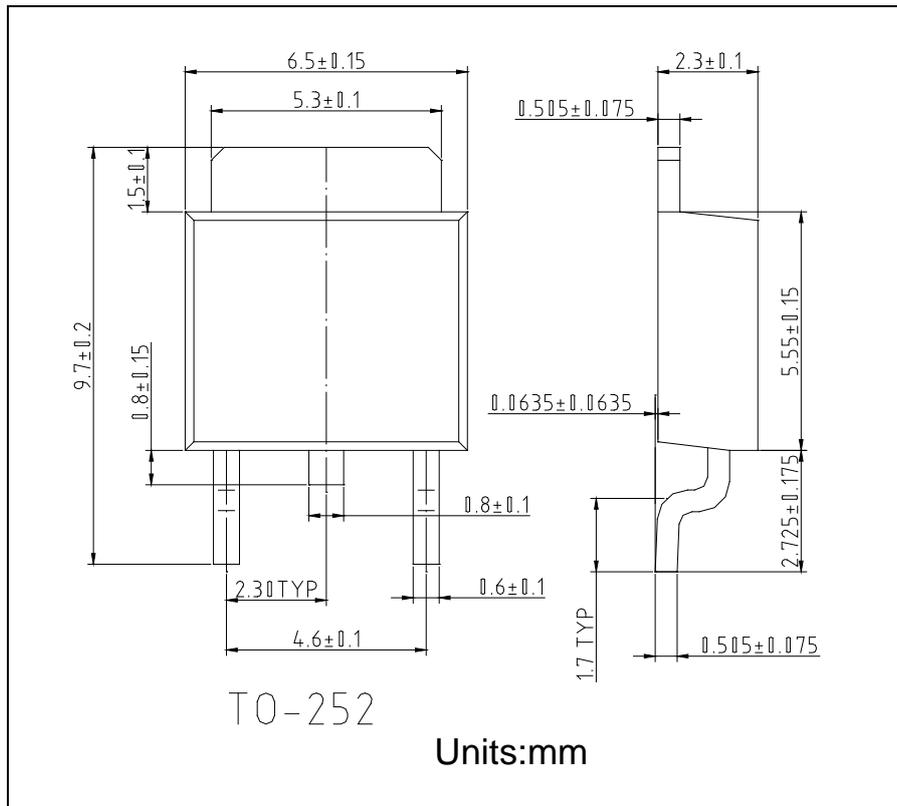



SSC8138GT8

● **Absolute Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise noted**

Parameter		Symbol	Ratings	Unit
Drain-Source Voltage		V_{DSS}	25	V
Gate-Source Voltage		V_{GSS}	± 20	V
Operating and Storage Junction Temperature Range		T_J, T_{STG}	-55 to +150	$^\circ\text{C}$
Mounted on PCB of Minimum Footprint	Pulsed Drain Current (Note 2)	I_{DM}	150	A
	Continuous Drain Current (Note 1)	I_D	17	A
	Total Power Dissipation (Note 1)	P_D	1.5	W
Mounted on PCB of 1in ² Pad Area	Pulsed Drain Current (Note 2)	I_{DM}	150	A
	Continuous Drain Current (25 $^\circ\text{C}$)	I_D	20	A
	Total Power Dissipation (25 $^\circ\text{C}$)	P_D	2.5	W
Mounted on Large Heat Sink	Pulsed Drain Current (Note 2)	I_{DM}	150	A
	Continuous Drain Current (25 $^\circ\text{C}$)	I_D	60 (Note 3)	A
	Total Power Dissipation (25 $^\circ\text{C}$)	P_D	50	W

● **Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise noted**

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0\text{ V}, I_D = 250\text{ }\mu\text{A}$	25	27	--	V
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS} = V_{GS}, I_D = 250\text{ }\mu\text{A}$	1.3	1.8	3.0	V
Gate-Body Leakage Current	I_{GSS}	$V_{GS} = \pm 20\text{ V}, V_{DS} = 0\text{ V}$	--	--	± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 24\text{ V}, V_{GS} = 0\text{ V}$	--	--	1	μA
Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS} = 10\text{ V}, I_D = 30\text{ A}$	--	4.8	6.0	mR
		$V_{GS} = 4.5\text{ V}, I_D = 30\text{ A}$	--	6.0	9.0	
Forward Transconductance	G_{FS}	$V_{DS} = 5\text{ V}, I_D = 5\text{ A}$	--	7.3	--	S
Diode Forward Voltage	V_{SD}	$V_{GS} = 0\text{ V}, I_S = 10\text{ A}$	--	0.86	1.3	V
Input Capacitance	C_{ISS}	$V_{DS} = 15\text{ V}, V_{GS} = 0\text{ V},$ $f = 1.0\text{ MHz}$	--	2650	--	pF
Output Capacitance	C_{OSS}		--	910	--	
Reverse Transfer Capacitance	C_{RSS}		--	774	--	
Turn-On Delay Time	$T_{D(ON)}$	$V_{DS} = 15\text{ V}, R_L = 15\text{ R},$ $I_{DS} = 1\text{ A},$ $V_{GS} = 10\text{ V}, R_{GEN} = 6\text{ R}$	--	18		nS
Turn-Off Delay Time	$T_{D(OFF)}$		--	61		

Notes:

1. DUT is mounted on a 1in² FR-4 board with 2oz. Copper in a still air environment at 25 $^\circ\text{C}$, the current rating is based on the DC (<10s) test conditions.
2. Repetitive rating, pulse width limited by junction temperature. 300us Pulse Drain Current Tested



SSC8138GT8

3. Current limited by bond wire.

● Typical Performance Characteristics

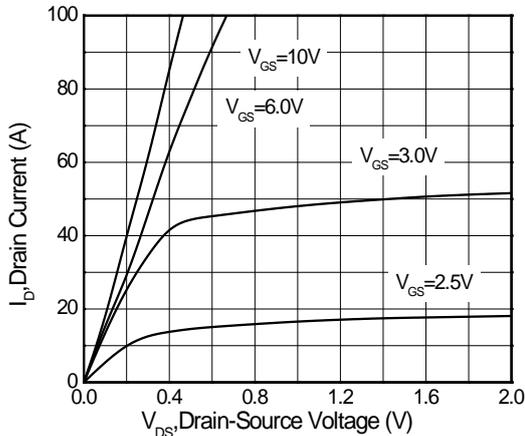


Fig1. Drain-Source Voltage vs. Drain Current

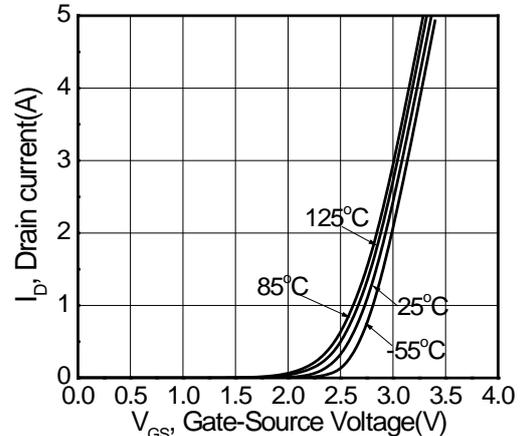


Fig2. Transfer Characteristics

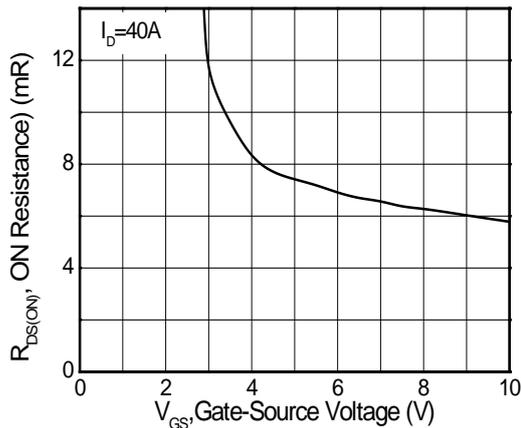


Fig3. Gate-Source Voltage vs. On-Resistance

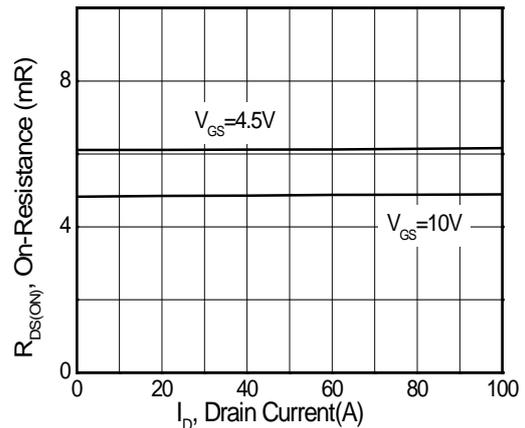


Fig4. Drain Current vs. On-Resistance

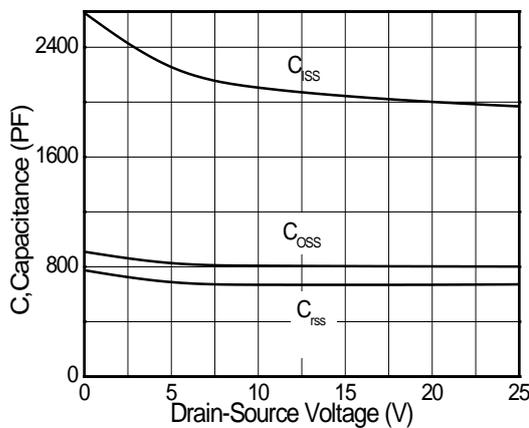


Fig5. Drain-Source Voltage vs. Capacitance

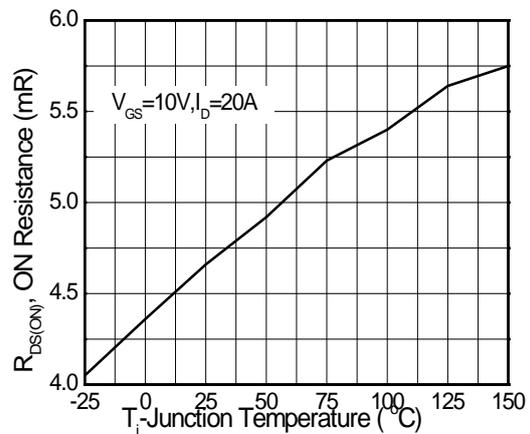


Fig6. Junction Temperature vs. On-Resistance

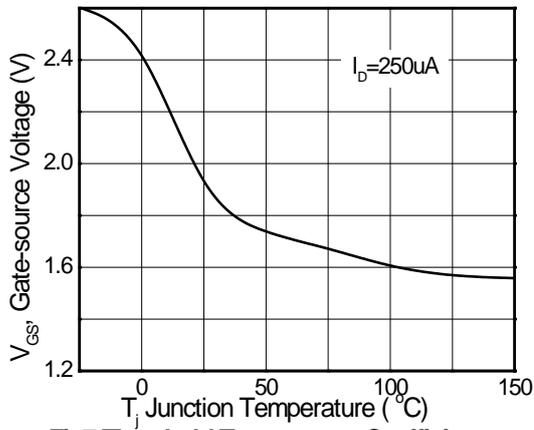


Fig7.Threshold Temperature Coefficiency

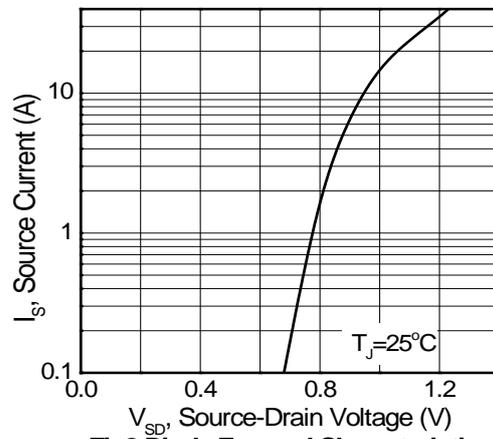


Fig8.Diode Forward Characteristics



SSC8138GT8

DISCLAIMER

AFSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. AFSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE graphs PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G., OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.