



# KKK<sup>®</sup> Illuminated Pushbutton Switches

## SWITCHES LB Series Standard Size Snap-in Mount (Cont.)

Fig.	Circuit	Switching Function	Color	Digi-Key Part No.	1	25	100	NKK Part No.
<b>LB Series Round Bezel Switches</b>								
2	DPDT	On-Mom	Amber	360-1662-ND	15.62	11.36	10.30	LB25CKW01-5D-JD
		On-Mom	Amber	360-2039-ND	15.62	11.36	10.30	LB25CKW01-5D-JD-RO
		On-Mom	Green	360-2040-ND	15.62	11.36	10.30	LB25CKW01-5F-JF-RO
		On-On	Red	360-2047-ND	17.07	12.42	11.06	LB26CKW01-5C-JC-RO
		On-On	Amber	360-2048-ND	17.07	12.42	11.06	LB26CKW01-5D-JD-RO
		On-On	Green	360-1666-ND	17.07	12.42	11.06	LB26CKW01-5F-JF
		On-On	Green	360-2049-ND	17.07	12.42	11.06	LB26CKW01-5F-JF-RO
<b>LB Series Rectangular Bezel Switches</b>								
3	SPDT	On-Mom	Red	360-1667-ND	13.20	9.60	8.70	LB15RKW01-5C-JC
		On-Mom	Red	360-2023-ND	13.20	9.60	8.70	LB15RKW01-5C-JC-RO
		On-Mom	Amber	360-2024-ND	13.20	9.60	8.70	LB15RKW01-5D-JD-RO
		On-Mom	Green	360-2025-ND	13.20	9.60	8.70	LB15RKW01-5F-JF-RO
		On-On	Red	360-1670-ND	14.65	10.66	9.66	LB16RKW01-5C-JC
		On-On	Red	360-2032-ND	14.65	10.66	9.66	LB16RKW01-5C-JC-RO
		On-On	Amber	360-2033-ND	14.65	10.66	9.66	LB16RKW01-5D-JD-RO
		On-On	Green	360-1672-ND	14.65	10.66	9.66	LB16RKW01-5F-JF
		On-On	Green	360-2034-ND	14.65	10.66	9.66	LB16RKW01-5F-JF-RO
	DPDT	On-Mom	Red	360-1673-ND	15.62	11.36	10.30	LB25RKW01-5C-JC
		On-Mom	Red	360-2041-ND	15.62	11.36	10.30	LB25RKW01-5C-JC-RO
		On-Mom	Amber	360-1674-ND	15.62	11.36	10.30	LB25RKW01-5D-JD
		On-Mom	Amber	360-2042-ND	15.62	11.36	10.30	LB25RKW01-5D-JD-RO
		On-Mom	Green	360-1675-ND	15.62	11.36	10.30	LB25RKW01-5F-JF
		On-Mom	Green	360-2043-ND	15.62	11.36	10.30	LB25RKW01-5F-JF-RO
		On-On	Red	360-2050-ND	17.07	12.42	11.06	LB26RKW01-5C-JC-RO
		On-On	Amber	360-1677-ND	17.07	12.42	11.06	LB26RKW01-5D-JD
		On-On	Amber	360-2051-ND	17.07	12.42	11.06	LB26RKW01-5D-JD-RO
		On-On	Green	360-2052-ND	17.07	12.42	11.06	LB26RKW01-5F-JF-RO
<b>LB Accessories</b>								
4	Protective Guard for Square LB Series			360-1005-ND	2.91	1.79	1.56	AT499
	Protective Guard for Rectangular LB Series			360-1007-ND	2.91	1.79	1.56	AT4057

◆ RoHS Compliant


Dim. in (mm) Inch

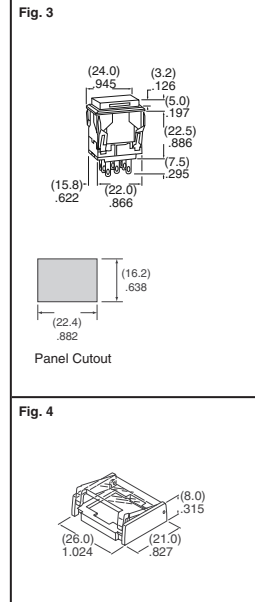

## BOURNS SMD Momentary Key Switches

**Electrical Characteristics:** • Contact Rating: Maximum Current: 100mA; Maximum Voltage: 24V  
 • Contact Resistance: 100mΩ maximum • Insulation Resistance: 100MΩ minimum (DC500V)  
**General Characteristics:** • Switch Type: Normally Open • Operating Temperature Range: -55°C - 125°C  
 • Dielectric Strength: 250VAC  
**Mechanical Characteristics:** • Cycle Life, Loaded: 10,000 actuations


Type	Digi-Key Part No.	Cut Tape Price Each	Digi-Key Part No.	Tape & Reel Pricing
		1 10 100		500 1,000 5,000
J-Hook	7914J-000ECT-ND	.95 .84 .71	7914J-000ETR-ND	270.00 473.00 405.00/M
Gull Wing	7914G-000ECT-ND	.95 .84 .71	7914G-000ETR-ND	270.00 473.00 405.00/M

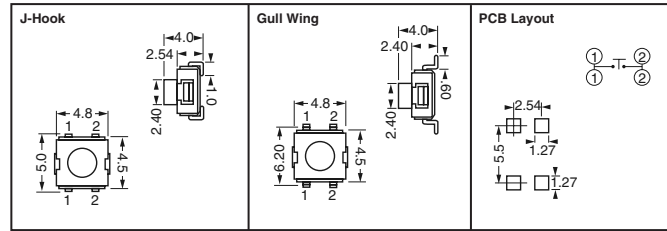

## Sealed Selector Switches

**Electrical Characteristics:** • Contact Rating: Maximum Current: 100mA Maximum Voltage: 24V  
 • Contact Timing: Non-Shorting • Contact Resistance: 2Ω maximum • Insulation Resistance: 100MΩ minimum (DC500V) • Dielectric Strength: 250VAC  
**General Characteristics:** • Switch Type: SPDT • Operating Temperature Range: -55°C - 125°C

Fig.	Size (mm)	Life	Digi-Key Part No.	Cut Tape Price Each	Digi-Key Part No.	Tape & Reel Pricing
				1 10 100		500 1,000
1	3	50	7813J-051ECT-ND	2.10 1.86 1.56	7813J-051ETR-ND	— 1050.00
	3	2000	7813J-023ECT-ND	2.31 2.05 1.72	7813J-023ETR-ND	— 1155.00
2	4	50	7814G-051ECT-ND	2.10 1.86 1.56	7814G-051ETR-ND	600.00 1050.00
	4	2000	7814G-023ECT-ND	2.31 2.05 1.72	7814G-023ETR-ND	660.00 1155.00
3	4	50	7814J-051ECT-ND	2.10 1.86 1.56	7814J-051ETR-ND	600.00 1050.00
	4	2000	7814J-023ECT-ND	2.31 2.05 1.72	7814J-023ETR-ND	660.00 1155.00

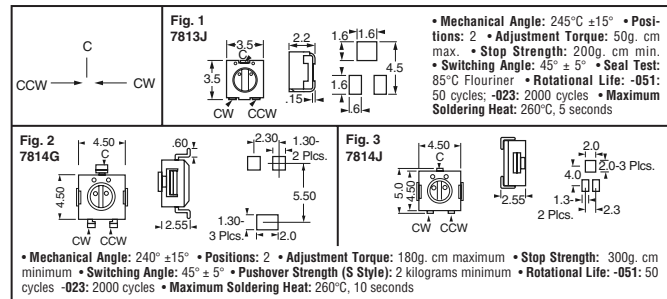


## COPAL ELECTRONICS

### Surface Mount Slide Switches CAS Series

**Electrical Characteristics:**  
 • Contact Rating: Non-switching DC50 V 100mA, Switching DC6V, 100mA DC24 V, 25mA, Minimum DC20mV 1µa. • Contact Resistance: 50mΩ maximum (1.5mA, 1kHz, 20mV) • Insulation Resistance: 1000MΩ (DC 100V) minimum • Dielectric Strength: AC500 V, 50Hz, 60s

Fig.	No. of Poles	Description	Digi-Key Part No.	Cut Tape Price Each	Tape & Reel Pricing	Copal Part No.
				10 100	1,000	
1A	2	SPDT, J Hook	CAS120JCT-ND	1.98 1.43	660.00	CAS-120TA
1B	2	SPDT, Gullwing	CAS120GCT-ND	1.76 1.27	585.00	CAS-120TB
2A	2	DPDT, J Hook	CAS220JCT-ND	3.15 2.28	1134.00	CAS-220TA
2B	2	DPDT, Gullwing	CAS220GCT-ND	3.78 2.73	1134.00	CAS-220TB
2C	2	SPDT 2 pos. J Hook	CASD20JCT-ND	3.15 2.28	1134.00	CAS-D20TA
2D	2	SPDT 2 pos. Gullwing	CASD20GCT-ND	3.15 2.28	1134.00	CAS-D20TB

\* For Tape and Reel part number, change CT-ND to TR-ND.

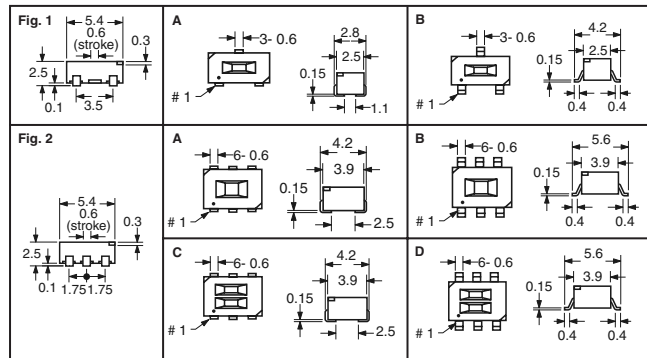

More Product Available Online: [www.digikey.com](http://www.digikey.com)

1902 (T073)

Toll-Free: 1-800-344-4539 • Phone 218-681-6674 • Fax: 218-681-3380