

ANALOG PWM IC

1.0 General Description

G1132F is a high performance offline PWM Power switch for low power AC/DC charger and adaptor applications up to 5W. It operates in primary-side regulation. Consequently, opto-coupler and TL431 could be eliminated.

Proprietary Constant Voltage (CV) and Constant Current (CC) control is integrated as shown in the Fig. 1. In CC control, the current and output power setting can be adjusted externally by the sense resistor R_s at CS pin. In CV control, multi-mode operations are utilized to achieve high performance and high efficiency.

In addition, good load regulation is achieved by the built-in cable drop compensation. Device operates in PFM in CC mode as well at large load condition and it operates in PWM with frequency reduction at light/medium load.

G1132F offers power on soft start control and protection coverage with auto-recovery features including Cycle-by-Cycle current limiting, VDD OVP, VDD clamp and UVLO. Excellent EMI performance is achieved with frequency jitter technique.

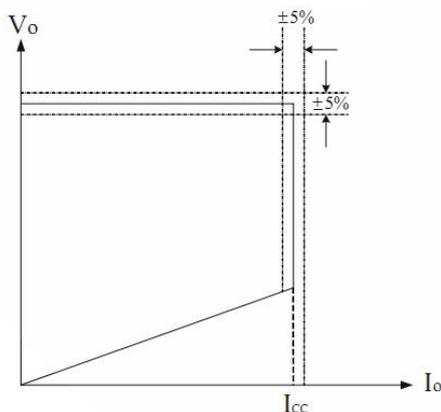


Fig.1. Typical CC/CV Curve

Features

- ◆ 5% CV and CC Regulation at Universal AC input
- ◆ Primary-side Regulation Without TL431 and Opto-coupler
- ◆ Built-in High-Voltage Power MOS
- ◆ Programmable CV and CC Regulation
- ◆ Adjustable Constant Current and Output Power Setting
- ◆ Built-in Secondary Constant Current Control with Primary Side Feedback
- ◆ Built-in Primary winding inductance compensation
- ◆ Programmable cable drop compensation
- ◆ Built-in Leading Edge Blanking (LEB)
- ◆ Power on Soft-start
- ◆ Built-in adaptive current peak regulation
- ◆ Cycle-by-Cycle Current Limiting
- ◆ VDD Under Voltage Lockout with Hysteresis (UVLO)
- ◆ VDD OVP and VDD Clamp
- ◆ Pb-free SOP-7

Applications

- ◆ Cell Phone Charger
- ◆ Digital Cameras Charger
- ◆ LED Driver
- ◆ Small Power Adaptor
- ◆ Auxiliary Power for PC, TV etc.
- ◆ Linear Regulator/RCC Replacement

G1132F is offered in SOP-7 package.

G1132F

High Precision CC/CV Primary-Side PWM Power Switch

2.0 Products Information

2.1 Pin configuration

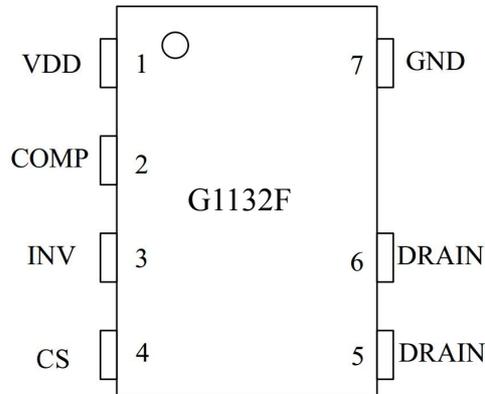


Fig.2. G1132F Pin Configuration

Pin Name	I/O	Description
VDD	P	Power Supply
COMP	I	Loop Compensation for CV Stability
INV	I	The Voltage feedback from auxiliary winding. Connected to resistor divider from auxiliary winding reflecting output voltage. PWM duty cycle is determined by EA output and current sense signal at pin 4.
CS	I	Current sense input. Connected to primary current sensing resistor.
DRAIN	O	HV MOSFET Drain Pin. The Drain pin is connected to the primary lead of the transformer
GND	P	Ground

2.2 Output Power Table

Product	85~264VAC
	Adapter ¹
G1132F	5W


Notes:

1. Maximum practical continuous power in an Adapter design with sufficient drain pattern as a heat sink, at 50°C ambient. Higher output power is possible with extra added heat sink or air circulation to reduce thermal resistance.



3.0 Package Information

SOP7:

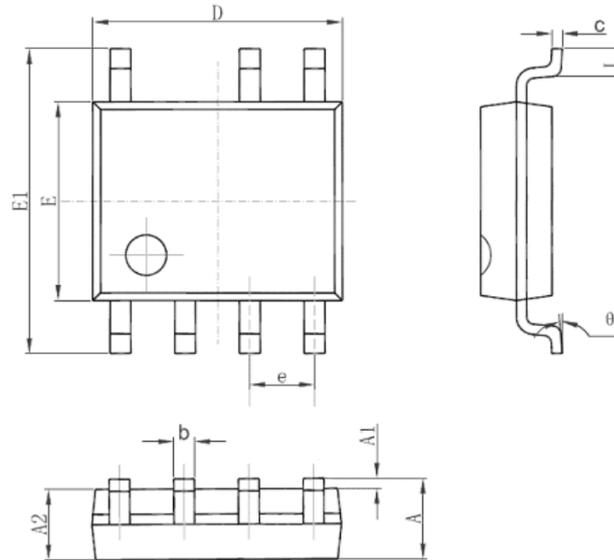

Symbol	Dimension in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.250	1.650	0.049	0.065
b	0.310	0.510	0.012	0.020
c	0.100	0.250	0.004	0.010
D	4.700	5.150	0.185	0.203
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

Data and specifications subject to change without notice.

This product has been designed and qualified for Industrial Level and Lead-Free.

Qualification Standards can be found on GS's Web site.

Global Semiconductor HEADQUARTERS:

Scotia Centre, 4th Floor, P.O.Box 2804, George Town, Grand Cayman KY1-1112, Cayman

Visit us at www.globalsemi-group.com for sales contact information.