


Keysight Technologies

HMMC-5620

6-20 GHz High-Gain Amplifier

Data Sheet

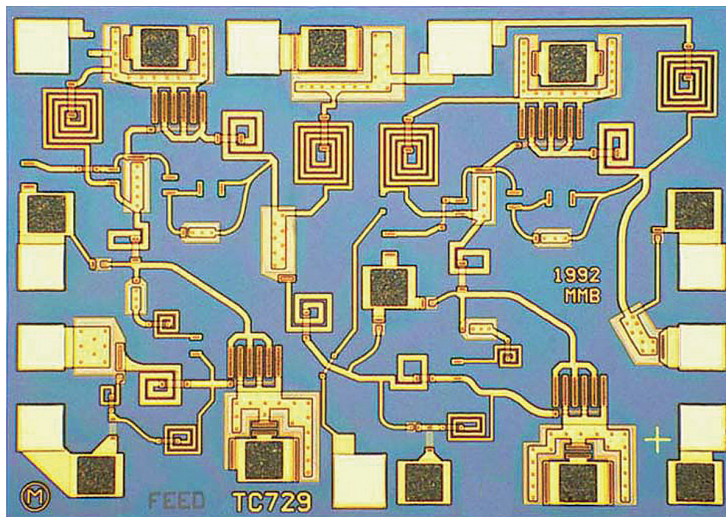


Features

- Wide-frequency range: 6-20 GHz
- High gain: 17 dB
- Gain flatness: ± 1.0 dB
- Return loss:
 - Input -15 dB
 - Output -15 dB
- Single bias supply operation
- Low DC power dissipation:
 - $P_{DC} \sim 0.5$ watts
- Medium power:
 - 20 GHz:
 - $P_{-1\text{ dB}}$: 12 dBm
 - P_{sat} : 13 dBm

Description

The Keysight Technologies, Inc. HMMC-5620 is a wideband GaAs MMIC amplifier designed for medium output power and high gain over the 6 to 20 GHz frequency range. Four MESFET cascade stages provide high gain, while the single bias supply offers ease of use. E-Beam lithography is used to produce gate lengths of $\sim 0.3\ \mu\text{m}$. The HMMC-5620 incorporates advanced MBE technology, Ti-Pt-Au gate metallization, silicon nitride passivation, and polyimide for scratch protection.

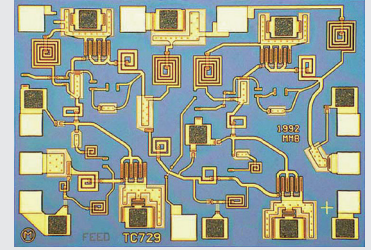

Chip size:

$1410 \times 1010\ \mu\text{m}$ (55.5×39.7 mils)

Chip size tolerance:

$\pm 10\ \mu\text{m}$ (± 0.4 mils)

Chip thickness:

$127 \pm 15\ \mu\text{m}$ (5 ± 0.6 mils)

Pad dimensions:

$80 \times 80\ \mu\text{m}$ (2.95×2.95 mils),
or larger

Absolute Maximum Ratings¹

Symbol	Parameters/conditions	Min	Max	Units
V_{DD}	Positive drain voltage		7.55	volts
I_{DD}	Total drain current	–3.0	135	mA
P_{DC}	DC power dissipation		1.0	watts
P_{in}	CW input power		20	dBm
T_{ch}	Operating channel temperature		+160	°C
T_{case}	Operating case temperature	–55		°C
T_{st}	Storage Temperature	–65	+165	°C
T_{max}	Maximum Assembly Temperature (for 60 seconds max.)		300	°C

1. Operation in excess of any one of these conditions may result in permanent damage to this device.
 $T_A = 25\ ^\circ\text{C}$ except for T_{ch} , T_{stg} , and T_{max} .

DC Specifications/Physical Properties¹

Symbol	Parameters/conditions	Min.	Typ.	Max	Units
I_{DD}	Drain current ($V_{DD} = +5.0\ \text{V}$)	100	70	135	mA
I_{DD}	Drain current ($V_{DD} = +7.0\ \text{V}$)	105			mA
θ_{ch-bs}	Thermal resistance ($T_{backside} = 25\ ^\circ\text{C}$)	70			°C/Watt

1. Measured in wafer form with $T_{chuck} = 25\ ^\circ\text{C}$. (Except θ_{ch-bs})

RF Specifications/Physical Properties

($V_{DD} = 5.0\text{ V}$, $I_{DD}(Q) = 100\text{ mA}$, $Z_{in} = Z_o = 50\ \Omega$)¹

Symbol	Parameters/conditions	6.0-20.0 GHz			
		Typ.	Min.	Max.	Units
BW	Guaranteed bandwidth		6	20	GHz
S_{21}	Small signal gain	17	15	21	dB
ΔS_{21}	Small signal gain flatness	± 1.0		± 1.25	dB
$(RL)_{in}$	Input return loss	-15		-10	dB
$(RL)_{out}$	Output return loss	-15		-10	dB
S_{12}	Reverse isolation	-55			dB
$P_{-1\text{ dB}}$	Output power at 1 dB gain compression	12			dBm
P_{SAT}	Saturated output power	13			dBm
H_2	Second harmonic, ($6 < f_o < 20$) ($P_o(f_o) = 10\text{ dBm}$)	-30			dBc
H_3	Third harmonic, ($6 < f_o < 20$) ($P_o(f_o) = 10\text{ dBm}$)	-40			dBc
NF	Noise figure	9.0			dB

1. Small-signal data measured in wafer form with $T_{chuck} = 25\text{ }^\circ\text{C}$.

Large-signal data measured on individual devices mounted in an Keysight 83040 series modular microcircuit package @ $T_A = 25\text{ }^\circ\text{C}$.

Applications

The HMMC-5620 amplifier is designed for use as a general purpose wideband, high gain stage in communication systems and microwave instrumentation. It is ideally suited for broadband applications requiring high gain and excellent port matches over a 6 to 20 GHz frequency range. Both RF input and output ports are AC-coupled on chip.

Biasing and Operation

This amplifier is biased with a single positive drain supply (V_{DD}). The recommended bias for the HMMC-5620 is $V_{DD} = 5.0\text{ V}$, which results in $I_{DD} = 100\text{ mA}$ (typ.). No other bias supplies or connections to the device are required for 6 to 20 GHz operation. See Figure 3 for assembly information.

Assembly Techniques

For RF bonds, MWTC recommends low inductance mesh interconnections for best return loss performance. GaAs MMICs are ESD sensitive. ESD preventive measures must be employed in all aspects of storage, handling, and assembly.

MMIC ESD precautions, handling considerations, die attach and bonding methods are critical factors in successful GaAs MMIC performance and reliability.

GaAs MMIC ESD, Die Attach and Bonding Guidelines, Application Note (5991-3484EN) provides basic information on these subjects.

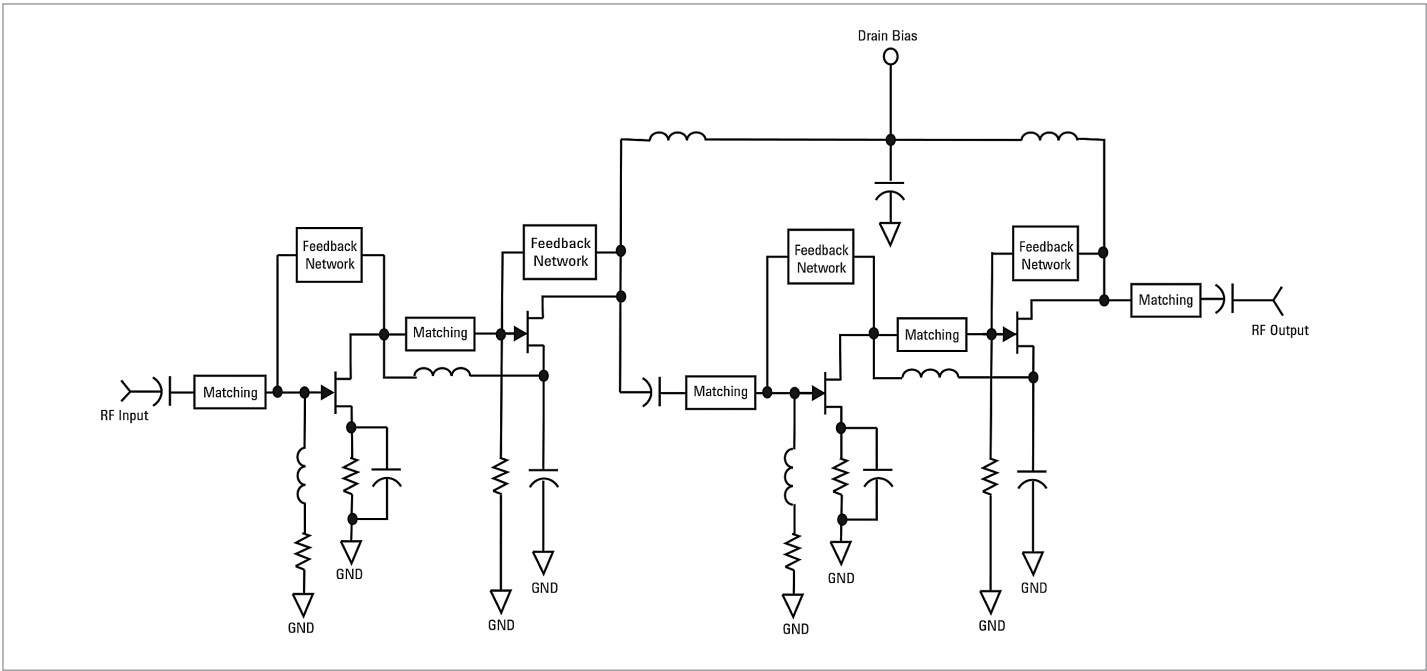


Figure 1. Simplified schematic diagram

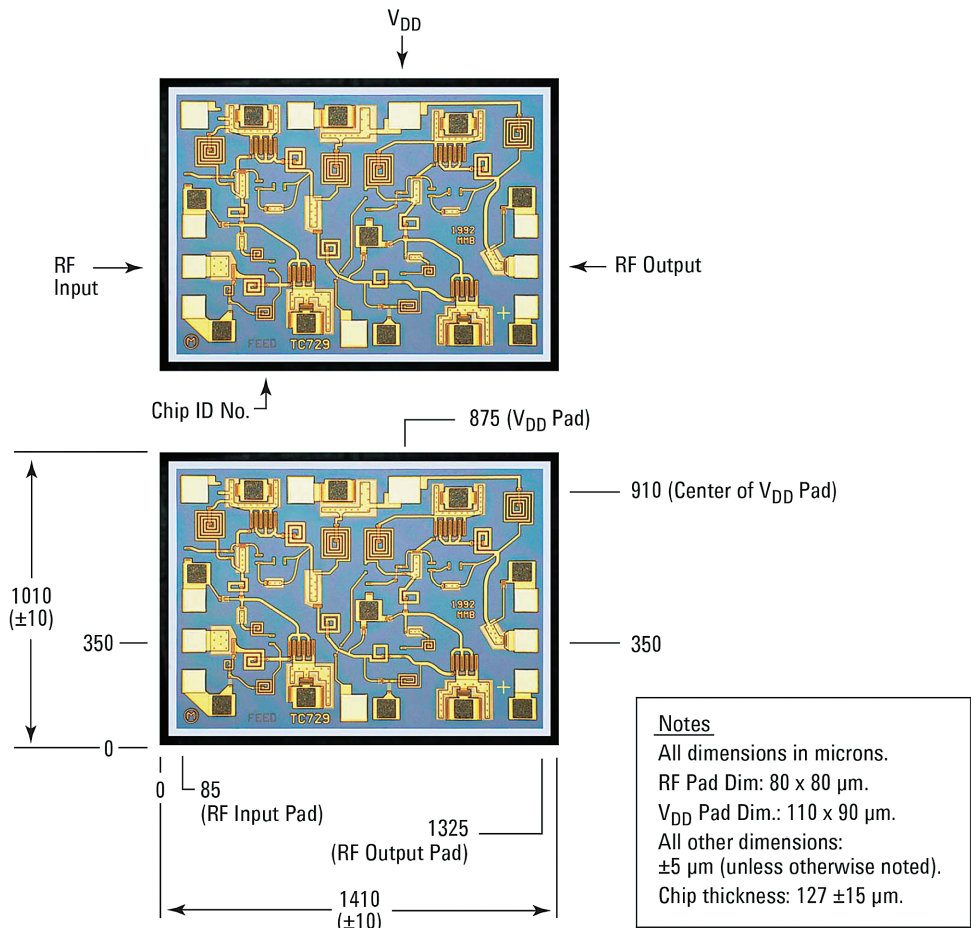


Figure 2. Bond pad locations

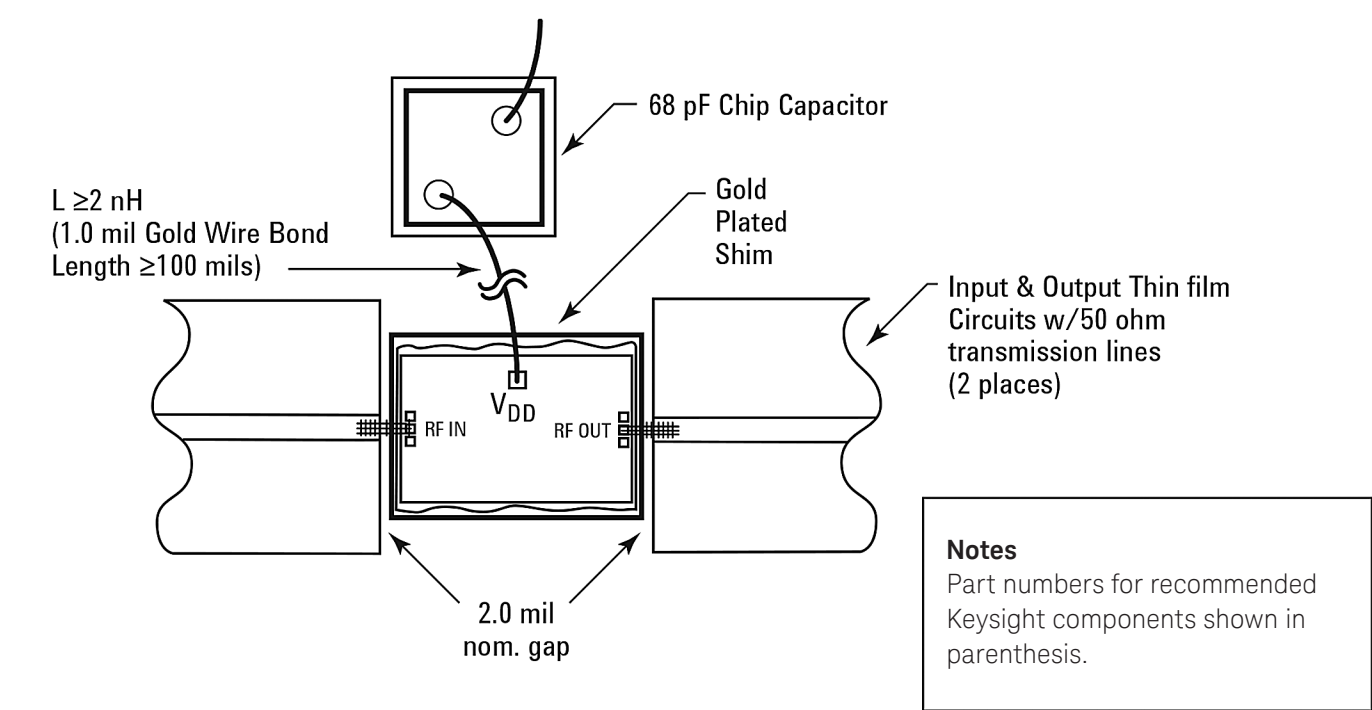


Figure 3. Assembly diagram (For 6.0-20.0 GHz operation)

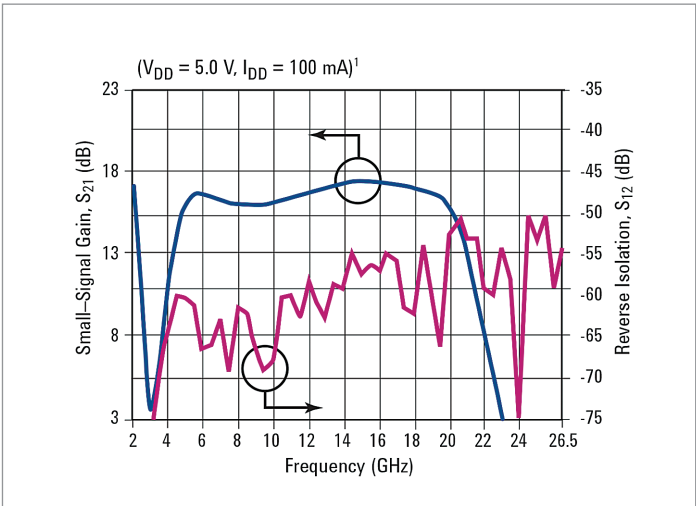


Figure 4. Typical gain and reverse isolation vs. frequency

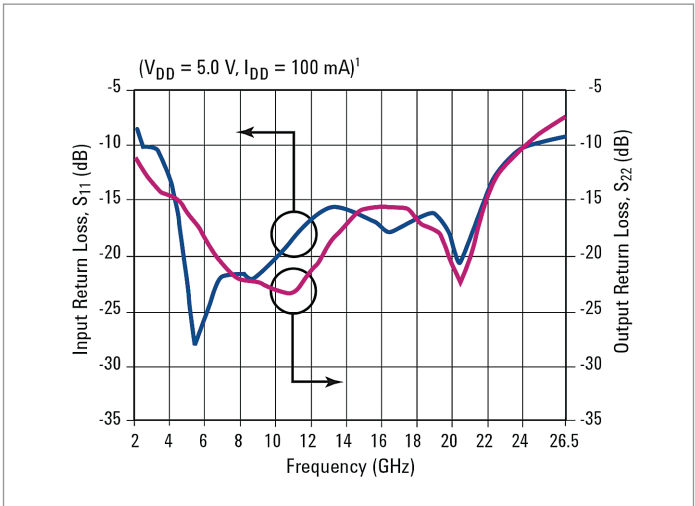


Figure 5. Typical input and output return loss vs. frequency

Typical S-Parameters¹

(T_{chuck} = 25 °C, V_{DD} = 5.0 V, I_{DD} = 100 mA, Z_{in} = Z_o = 5 Ω)

Freq. (GHz)	S ₁₁			S ₁₂			S ₂₁			S ₂₂		
	dB	Mag	Ang	dB	Mag	Ang	dB	Mag	Ang	dB	Mag	Ang
2.0	-10.7	0.292	-100.3	-46.1	0.0049	-174.7	-6.2	0.491	-52.2	-8.1	0.395	-152.2
3.0	-13.5	0.212	-117.5	-74.1	0.0002	114.0	3.5	1.489	-170.0	-10.1	0.311	-171.5
4.0	-14.6	0.186	-136.6	-63.1	0.0007	-122.1	13.0	4.486	82.2	-12.7	0.232	136.5
5.0	-15.8	0.162	-168.9	-60.4	0.0010	-161.8	16.0	6.310	-26.5	-21.7	0.082	61.5
6.0	-18.4	0.120	157.5	-66.5	0.0005	162.7	16.7	6.839	-116.8	-25.7	0.052	-86.6
7.0	-20.9	0.090	123.0	-62.7	0.0007	-175.3	16.3	6.531	173.2	-22.1	0.079	-131.4
8.0	-22.2	0.078	83.1	-61.3	0.0009	-178.0	16.0	6.310	114.2	-21.7	0.082	-150.6
9.0	-21.9	0.080	41.3	-66.5	0.0005	-62.4	16.0	6.310	60.2	-22.5	0.075	-156.7
10.0	-20.2	0.097	6.6	-68.1	0.0004	-159.3	16.1	6.383	9.0	-23.2	0.070	-152.9
11.0	-18.4	0.120	-21.0	-60.0	0.0010	-113.5	16.3	6.531	-40.7	-23.4	0.067	-143.0
12.0	-16.7	0.146	-46.4	-58.3	0.0012	-112.2	16.6	6.761	-89.9	-21.5	0.084	-136.8
13.0	-15.8	0.161	-70.0	-62.7	0.0007	-130.0	17.0	7.079	-139.4	-19.1	0.111	-133.7
14.0	-15.8	0.163	-90.0	-59.3	0.0011	-161.1	17.3	7.328	170.1	-17.2	0.137	-143.0
15.0	-16.4	0.151	-105.6	-57.5	0.0013	173.9	17.4	7.413	118.6	-16.0	0.159	-152.8
16.0	-17.5	0.134	-115.4	-57.1	0.0014	-165.9	17.5	7.499	66.0	-15.5	0.168	-167.9
17.0	-17.7	0.130	-114.1	-55.6	0.0017	175.5	17.3	7.328	12.3	-15.5	0.167	-179.7
18.0	-16.8	0.145	-118.4	-62.3	0.0008	98.2	17.0	7.079	-43.1	-16.5	0.149	162.9
19.0	-16.1	0.156	-131.6	-59.7	0.0010	112.8	16.7	6.839	-101.9	-17.7	0.130	145.2
20.0	-18.5	0.119	-143.8	-52.5	0.0024	72.9	16.0	6.310	-168.5	-20.8	0.091	93.0
21.0	-19.9	0.101	-108.1	-53.2	0.0022	-7.1	15.3	5.842	119.8	-20.4	0.096	-4.3
22.0	-14.2	0.195	-107.7	-59.3	0.0011	-8.0	10.7	3.414	54.2	-14.9	0.179	-63.6
23.0	-11.6	0.263	-125.6	-54.0	0.0020	-54.4	5.4	1.857	-0.4	-12.0	0.250	-93.3
24.0	-10.3	0.306	-142.2	-75.8	0.0002	-158.2	0.3	1.034	-47.5	-10.3	0.306	-110.4
25.0	-9.6	0.330	-157.2	-53.5	0.0021	-165.8	-4.5	0.595	-90.5	-9.0	0.353	-124.2
26.0	-9.2	0.347	-169.9	-59.0	0.0011	-137.5	-9.0	0.355	-131.1	-7.9	0.402	-134.3
26.5	-9.1	0.349	-357.4	-54.9	0.0018	78.2	-11.2	0.275	-511.3	-7.4	0.426	-140.2

1. Data obtained from on-wafer measurements.

Additional Performance Characteristics

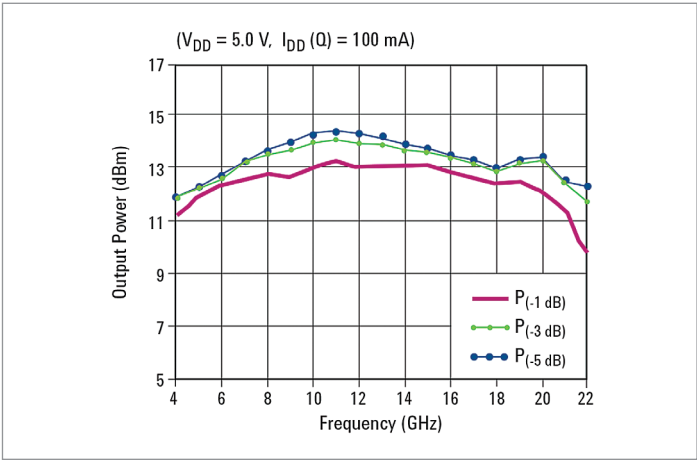


Figure 6. Typical output power vs. frequency (w/5 V bias)

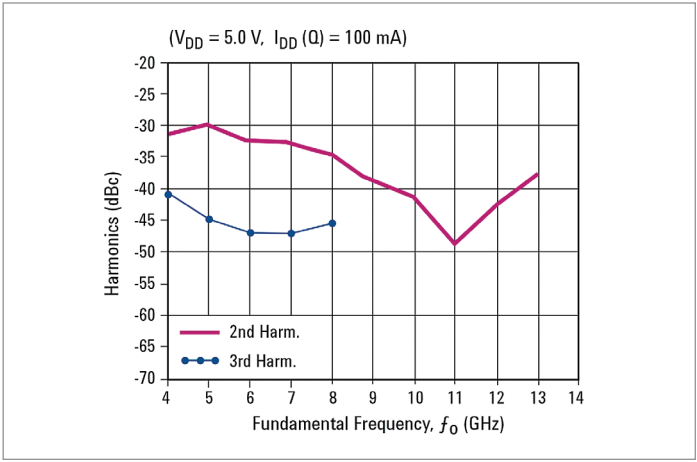


Figure 7. Typical second and third harmonics vs. fundamental frequency at $P_{out} = 10\text{ dBm}$

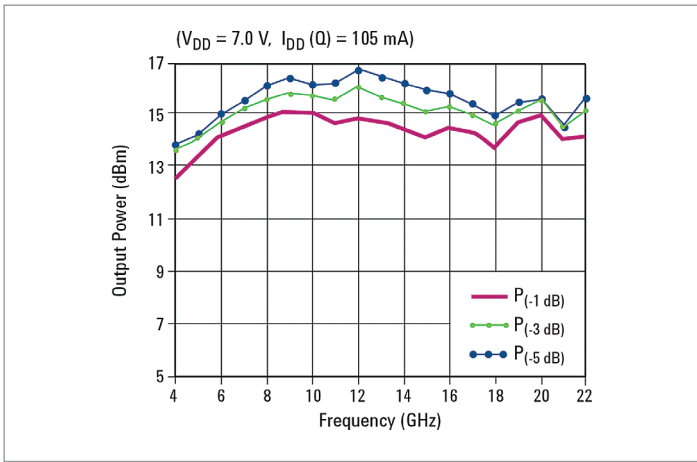


Figure 8. Typical output power vs. frequency (w/7 V bias)

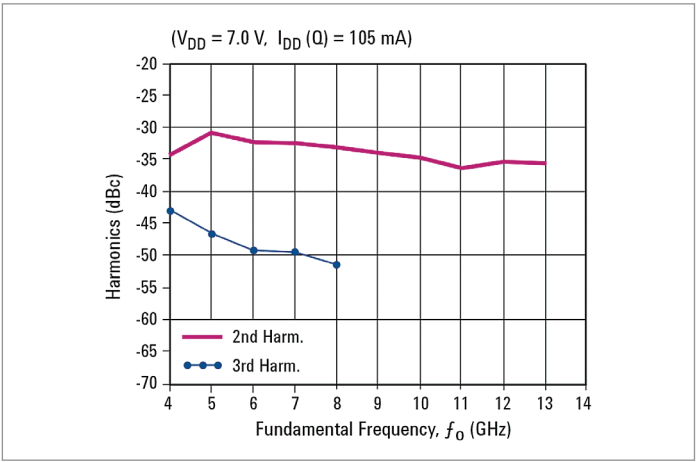


Figure 9. Typical second and third harmonics vs. fundamental frequency at $P_{out} = 10\text{ dBm}$

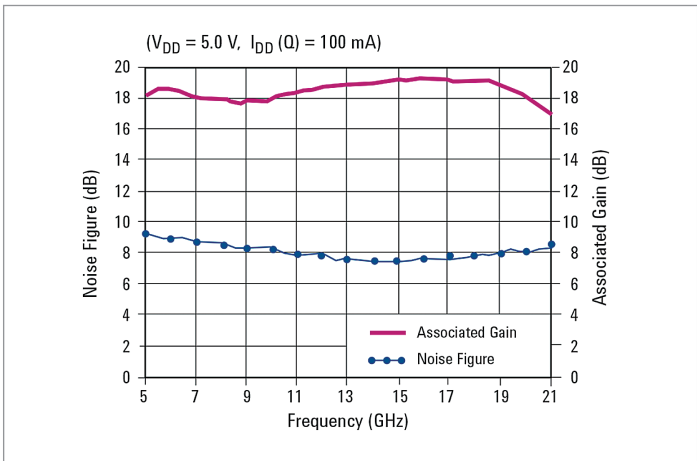


Figure 10. Typical noise figure performance vs. frequency

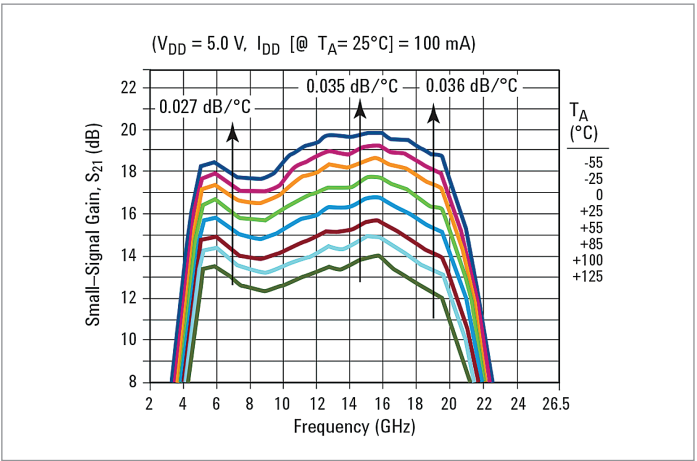



Figure 11. Typical small-signal gain vs. temperature

Note: All data measured on individual devices mounted in an 83040 series modular microcircuit package @ $T_A = 25\text{ }^\circ\text{C}$, except where noted.

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

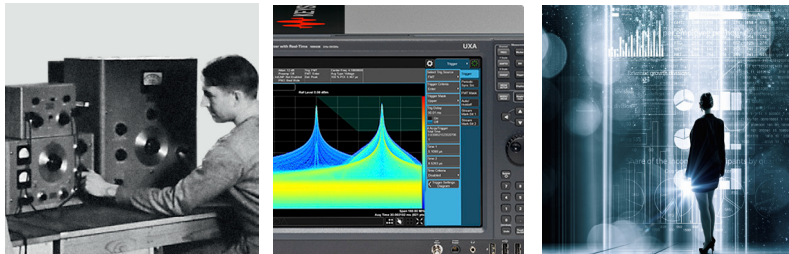

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/emc

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:
www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System



This information is subject to change without notice.
© Keysight Technologies, 2017
Published in USA, December 1, 2017
5989-6567EN
www.keysight.com