

Metal Oxide Varistors (MOV)

Features


- Wide operating voltage (V1mA) range from 18V to 1800V
- Fast responding to transient over-voltage
- Large absorbing transient energy capability
- Low clamping ratio and no follow-on current
- Meets MSL level 1, per J-STD-020
- Operating Temperature: -40°C ~ +85°C
- Storage Temperature: -40°C ~ +125°C
- Safety certification:



Applications

- Transistor, diode, IC, thyristor or triac semiconductor protection
- Surge protection in consumer electronics
- Surge protection in industrial electronics
- Surge protection in electronic home appliances, gas and petroleum appliances
- Relay and electromagnetic valve surge absorption

Description of Part Number

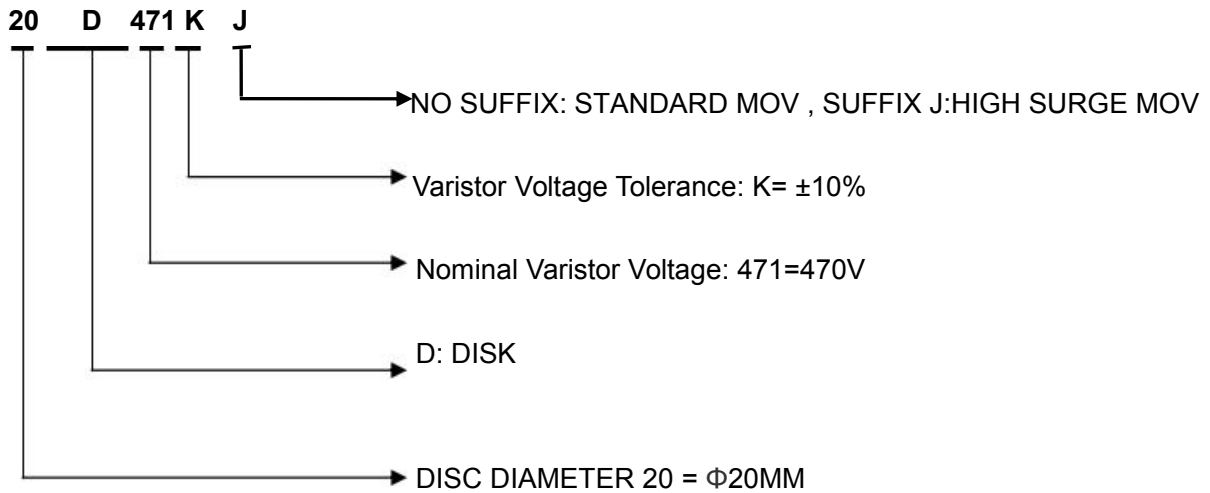

Delivery Time

10KV/5KA MOV	Delivery Time
20D820KEC~20D821KEC	18days

Electrical Characteristics

Part Number	Maximum Allowable Voltage		Varistor Voltage $V_{1mA}(V)$	Maximum Clamping Voltage $V_C(V)_{AT100A}$	Withstandin Surge Current 1.2/50us & 8/20us combination of wave,10KV/5KA Sub 0,90,180,270 four phases,Total	Maximum Energy (10/1000μs) (J)	Typical Capacitance (Reference) 1KHz(pf)	Safety Certification	
	$V_{AC}(V)$	$V_{DC}(V)$						UL	VDE
20D820KEC	50	65	82(73.8~90.2)	135	40 times	62	4900	√	√
20D101KEC	60	85	100(90~110)	165	40 times	77	4000	√	√
20D121KEC	75	100	120(108~132)	200	40 times	94	3300	√	√
20D151KEC	95	125	150(135~165)	250	40 times	117	2700	√	√
20D181KEC	115	150	180(162~198)	300	40 times	143	2200	√	√
20D201KEC	130	170	200(180~220)	340	40 times	154	2000	√	√
20D221KEC	140	180	220(198~242)	360	40 times	171	1800	√	√
20D241KEC	150	200	240(216~264)	395	40 times	185	1650	√	√
20D271KEC	175	225	270(243~297)	455	40 times	209	1500	√	√
20D301KEC	190	250	300(270~330)	500	40 times	231	1300	√	√
20D331KEC	210	275	330(297~363)	550	40 times	251	1200	√	√
20D361KEC	230	300	360(324~396)	595	40 times	281	1100	√	√
20D391KEC	250	320	390(351~429)	650	40 times	303	1000	√	√
20D431KEC	275	350	430(387~473)	710	40 times	336	930	√	√
20D471KEC	300	385	470(423~517)	775	40 times	385	850	√	√
20D511KEC	320	415	510(459~561)	845	40 times	396	780	√	√
20D561KEC	350	460	560(504~616)	925	40 times	418	710	√	√
20D621KEC	385	505	620(558~682)	1025	40 times	429	650	√	√
20D681KEC	420	560	680(612~748)	1120	40 times	440	600	√	√
20D751KEC	460	615	750(675~825)	1240	40 times	462	580	√	√
20D781KEC	485	640	780(702~858)	1290	40 times	484	560	√	√
20D821KEC	510	670	820(738~902)	1355	40 times	506	525	√	√

Dimension(mm) Straight Leads

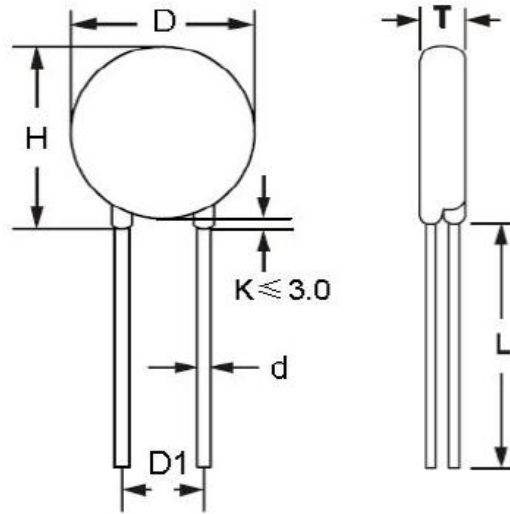


TABLE1		TABLE2			
Symbol	Dimensions	Part number	T(±1.0mm)	Part number	T(±1.0mm)
H(Max)	26.5mm	20D820K	3.48mm	20D361K	4.08mm
L(Min)	22.0mm	20D101K	3.65mm	20D391K	4.25mm
D(Max)	23.0mm	20D121K	3.80mm	20D431K	4.47mm
D1(±0.8)	7.5±0.8/10.0±1.0	20D151K	3.52mm	20D471K	4.69mm
T	TABLE2	20D181K	3.66mm	20D511K	4.91mm
d(±0.05)	0.8mm/1.0mm	20D201K	3.76mm	20D561K	5.18mm
		20D221K	3.84mm	20D621K	5.51mm
		20D241K	3.95mm	20D681K	5.84mm
		20D271K	4.00mm	20D751K	6.23mm
		20D301K	4.05mm	20D781K	6.39mm
		20D331K	4.22mm	20D821K	6.61mm

Packing Information

Part Number	Quantity	Packaging Option	Packaging Specification
20DxxxK	250PCS	Plastic bag	Bulk Pack

Notice for use

To avoid damage to other equipment due to fire or deterioration caused by varistor, please refer to and observe the following principles:

1) When a high current or high voltage flows into the varistor, the varistor itself may be damaged, heated, smoke, catch fire and burst.

To avoid this, fuses or circuit breakers can be installed at both ends of the varistor or power supply;

The fuses of the following specifications are for reference only:

	Diameter 05D	07D	10D	14D	20D
Rated current of fuse	1-2A	2-3A	3-5A	3-10A	5-15A

2) Do not allow the current and energy flowing into the varistor to exceed its rated value.

3) The Varistor brand names and marks are all patent applications of the company. Customers who use or sell our Varistors that are not specifically designated for such applications are at their own risk.

4) All Varistors product specifications and data are subject to change without notice, please improve. For any data sheet Or any other data sheet. Any errors included. Inaccurate or incomplete shall not be liable.

5) Regarding the suitability of products for specific applications. It is the customer's responsibility to confirm that products with the characteristics described in the product specifications application. The data provided in the parameter data sheets and / or specifications may vary for different applications and performance may vary over time Variety. All operating parameters, including typical parameters, must be provided by the customer 's technical experts. Product specifications will not expand or Modify the procurement terms and conditions in other ways, including but not limited to the guarantees described therein.

6) Do not place flammable substances near the varistor.

7) The varistor can only emit a small amount of heat energy, so it is not suitable for use in equipment that often generates sudden heat.

In addition, the higher the working environment of the varistor, the smaller the proportion of heat dissipated.

Varistors can only dissipate a small amount of heat energy, so they are not suitable for use in equipment that often generates sudden heat.

If a large amount of heat acts on the varistor in an instant, it is possible that the heat energy cannot be dissipated within the pulse time And the varistor is damaged.

8) When welding, please be careful not to melt the welding points of the varistor and the resin coating.

Material category policy

All our Varistor products hereby certify that RoHS-compliant products are in accordance with the definitions and

Restrictions on June 8, 2011 regarding restrictions on the use of certain hazardous substances (Reach) in electrical and electronic equipment. We confirm All our Varistor products comply with the IEC 61249-2-21 JEDEC JS709A standard.