


Features

- * 3000 Watts Peak Power
- * Low Inductance
- * Unidirectional and Bidirectional unit
- * Voltage Range: 5.0 to 220 Volts.



RoHS
COMPLIANT

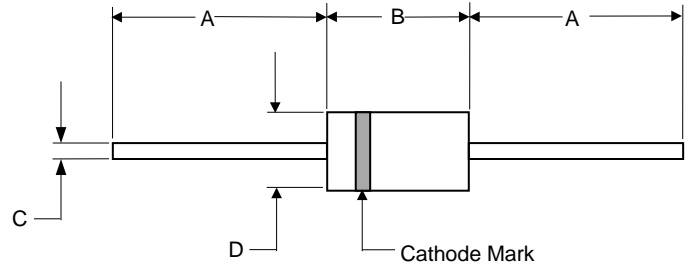

DIM	P600			
	INCHES		MM	
	MIN	MAX	MIN	MAX
A	1	---	25.4	---
B	0.339	0.358	8.6	9.1
C	0.047	0.051	1.2	1.3
D	0.339	0.358	8.6	9.1

Mechanical Data

- * Epoxy meets UL 94 V-0 flammability rating
- * Moisture Sensitivity Level 1
- * Marking : Cathode band(For Uni-directional) and type number
- * Suffix "C" of part number denotes Bi-directional unit.

Electrical Characteristics (T_A=25°C unless otherwise noted)

RATING	SYMBOL	VALUE	UNITS
Peak Pulse Power Dissipation on 10/1000us waveform (Note 1,FIG.1)	P _{ppm}	Minimum 3000	Watts
Steady State Power Dissipation at T _L = 75 °C , Lead lengths.375", (9.5mm) (Note 2)	P _{M(AV)}	8	Watts
Operating junction and Storage Temperature Range	T _J /T _{STG}	-55 to +175	°C

Notes :

- 1.Non-repetitive current pulse , per Fig. 3 and derated above T_A = 25 per Fig. 2 .
- 2.Mounted on Copper Pad area of 1.6jÁ1.6" (40jÁ40mm) per Fig. 5.



3KP5.0(C)(A) THRU 3KP220(C)(A)

3000Watts Transient Voltage Suppressors 5.0 to 220 Volts







Electrical Characteristics (T_A=25°C unless otherwise noted)

3KP PART NUMBER		REVERSE STAND- OFF VOLTAGE V _{RWM} (V)	BREAKDOWN VOLTAGE V _{BR} (V) MIN.@I _T	BREAKDOWN VOLTAGE V _{BR} (V) MAX.@I _T	TEST CURRENT I _T (mA)	MAXIMUM CLAMPING VOLTAGE @I _p V _c (V)	PEAK PULSE CURRENT I _{pp} (A)	REVERSE LEAKAGE @V _{RWM} I _R (μ A)
UNI-POLAR	BI-POLAR							
3KP5.0A	3KP5.0CA	5	6.4	7	50	9.2	326.1	5000
3KP6.0A	3KP6.0CA	6	6.67	7.37	50	10.3	291.3	5000
3KP6.5A	3KP6.5CA	6.5	7.22	7.98	50	11.2	267.9	2000
3KP7.0A	3KP7.0CA	7	7.78	8.6	50	12	250	1000
3KP7.5A	3KP7.5CA	7.5	8.33	9.21	5	12.9	232.6	250
3KP8.0A	3KP8.0CA	8	8.89	9.83	5	13.6	220.6	150
3KP8.5A	3KP8.5CA	8.5	9.44	10.4	5	14.4	208.3	50
3KP9.0A	3KP9.0CA	9	10	11.1	5	15.4	194.8	20
3KP10A	3KP10CA	10	11.1	12.3	5	17	176.5	15
3KP11A	3KP11CA	11	12.2	13.5	5	18.2	164.8	10
3KP12A	3KP12CA	12	13.3	14.7	5	19.9	150.8	10
3KP13A	3KP13CA	13	14.4	15.9	5	21.5	139.5	10
3KP14A	3KP14CA	14	15.6	17.2	5	23.2	129.3	10
3KP15A	3KP15CA	15	16.7	18.5	5	24.4	123	10
3KP16A	3KP16CA	16	17.8	19.7	5	26	115.4	10
3KP17A	3KP17CA	17	18.9	20.9	5	27.6	108.7	10
3KP18A	3KP18CA	18	20	22.1	5	29.2	102.7	10
3KP20A	3KP20CA	20	22.2	24.5	5	32.4	92.6	10
3KP22A	3KP22CA	22	24.4	26.9	5	35.5	84.5	10
3KP24A	3KP24CA	24	26.7	29.5	5	38.9	77.1	10
3KP26A	3KP26CA	26	28.9	31.9	5	42.1	71.3	10
3KP28A	3KP28CA	28	31.1	34.4	5	45.4	66.1	10
3KP30A	3KP30CA	30	33.3	36.8	5	48.4	62	10
3KP33A	3KP33CA	33	36.7	40.6	5	53.3	56.3	10
3KP36A	3KP36CA	36	40	44.2	5	58.1	51.6	10
3KP40A	3KP40CA	40	44.4	49.1	5	64.5	46.5	10
3KP43A	3KP43CA	43	47.8	52.8	5	69.4	43.2	10
3KP45A	3KP45CA	45	50	55.3	5	72.7	41.3	10
3KP48A	3KP48CA	48	53.3	58.9	5	77.4	38.8	10
3KP51A	3KP51CA	51	56.7	62.7	5	82.4	36.4	10
3KP54A	3KP54CA	54	60	66.3	5	87.1	34.4	10
3KP58A	3KP58CA	58	64.4	71.2	5	93.6	32.1	10
3KP60A	3KP60CA	60	66.7	73.7	5	96.8	31	10
3KP64A	3KP64CA	64	71.1	78.6	5	103	29.1	10
3KP70A	3KP70CA	70	77.8	86	5	113	26.5	10
3KP75A	3KP75CA	75	83.3	92.1	5	121	24.8	10
3KP78A	3KP78CA	78	86.7	95.8	5	126	23.8	10
3KP85A	3KP85CA	85	94.4	104	5	137	21.9	10
3KP90A	3KP90CA	90	100	111	5	146	20.5	10
3KP100A	3KP100CA	100	111	123	5	162	18.5	10
3KP110A	3KP110CA	110	122	135	5	177	16.9	10
3KP120A	3KP120CA	120	133	147	5	193	15.5	10
3KP130A	3KP130CA	130	144	159	5	209	14.4	10
3KP150A	3KP150CA	150	167	185	5	243	12.3	10
3KP160A	3KP160CA	160	178	197	5	259	11.6	10
3KP170A	3KP170CA	170	189	209	5	275	10.9	10
3KP180A	3KP180CA	180	200	221	5	289	10.4	10
3KP190A	3KP190CA	190	211	233	5	310	9.7	10
3KP200A	3KP200CA	200	222	246	5	329.2	9.1	10
3KP210A	3KP210CA	210	233	258	5	349.5	8.6	10
3KP220A	3KP220CA	220	244	270	5	371.1	8.1	10

Notes : For bidirectional type having V_{RWM} of 10 volts and less, the I_R limit is double.

For parts without A , the V_{BR} is ±10%

Ratings and Characteristic Curves

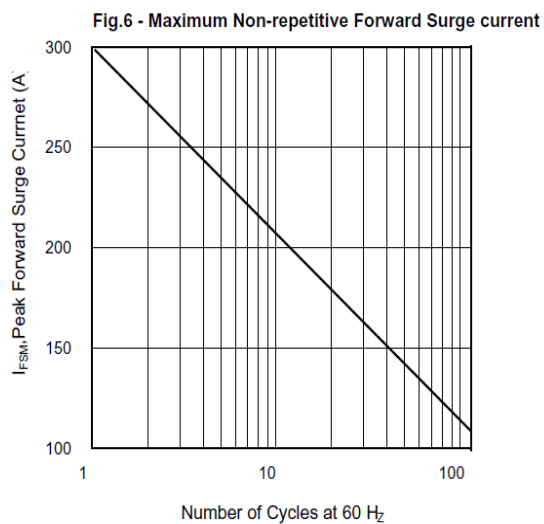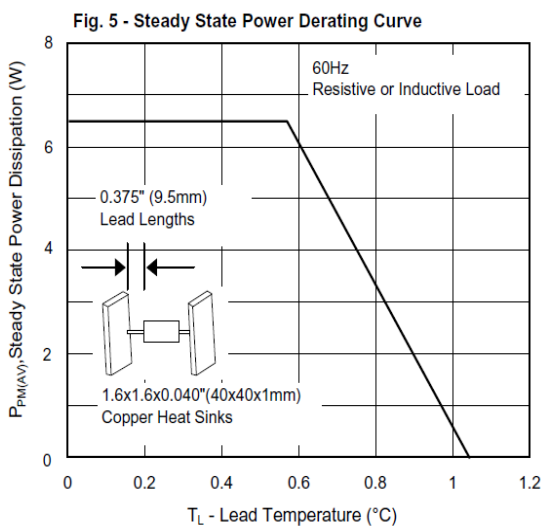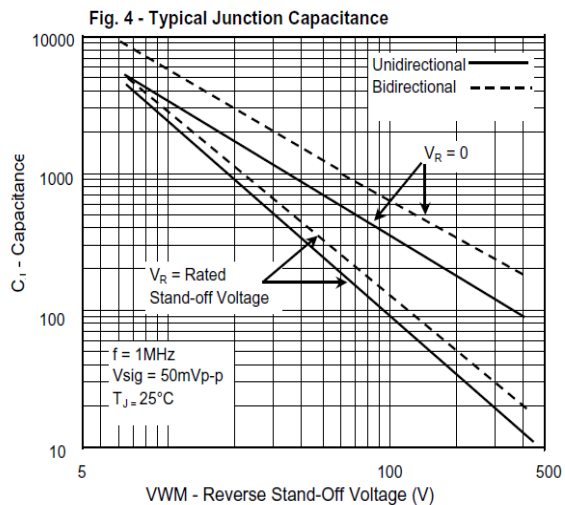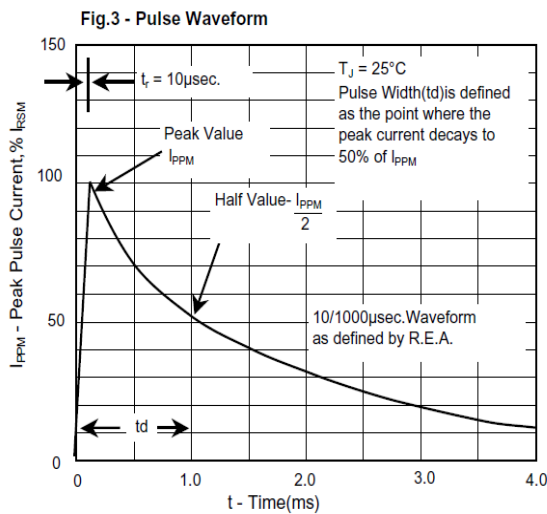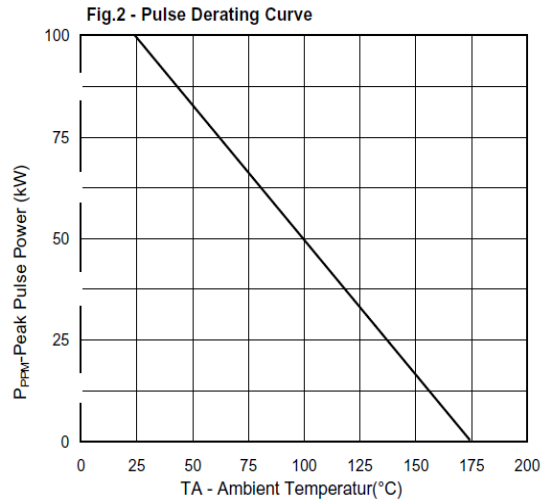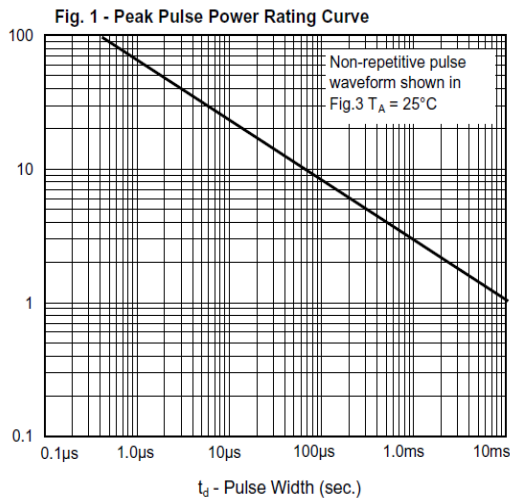



3KP5.0(C)(A) THRU 3KP220(C)(A)

3000Watts Transient Voltage Suppressors 5.0 to 220 Volts

Ordering Information

Part No.	Package	Packing Code	Packing
3KP5.0(C)(A) THRU 3KP220(C)(A)	P600	B02	200pcs/Bulk
3KP5.0(C)(A) THRU 3KP220(C)(A)	P600	A05	500pcs/Ammo(52mm)
3KP5.0(C)(A) THRU 3KP220(C)(A)	P600	R08	800pcs/Reel(52mm)

Disclaimer

Specifications of the products displayed herein are subject to change without notice. JGD or anyone on its behalf, assumes no responsibility or liability for any errors in accuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in JGD's terms and conditions of sale for such products, JGD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of JGD products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify JGD for any damages resulting from such improper use or sale.