

Document No.	853-1437
ECN No.	99800
Date of Issue	June 14, 1990
Status	Product Specification
ECL Products	

100179

Carry Look-Ahead Generator

FEATURES

- Typical propagation delay: 1.9ns
- Typical supply current ($-I_{EE}$): 150mA

DESCRIPTION


The 100179 is a high-speed, Carry Look-Ahead Generator intended for use with the 100180 6-bit Fast Adder and the 100181 4-bit ALU.

All unused inputs can be left open due to integrated pull-down resistors.

PIN DESCRIPTION

PINS	DESCRIPTION
$\overline{C}_{IN}$	Carry Input (active Low)
$\overline{P}_0 - \overline{P}_7$	Carry Look-Ahead Propagate inputs (active Low)
$\overline{G}_0 - \overline{G}_7$	Carry Look-Ahead Generate inputs. (active-Low)
$\overline{C}_2, \overline{C}_4, \overline{C}_6, \overline{C}_8$	Carry Outputs (active-Low)


IEC/IEEE SYMBOL

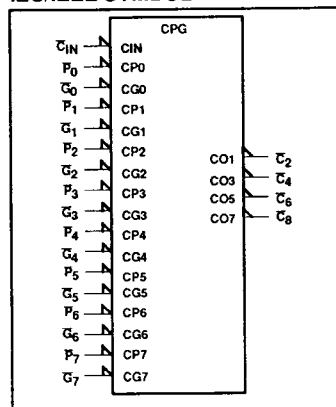

ORDERING INFORMATION

DESCRIPTION	ORDER CODE
24-Pin Ceramic DIP (400 mils wide)	100179F
24-Pin Ceramic Flat Pack	100179Y
28-Pin PLCC	100179A


PIN CONFIGURATIONS

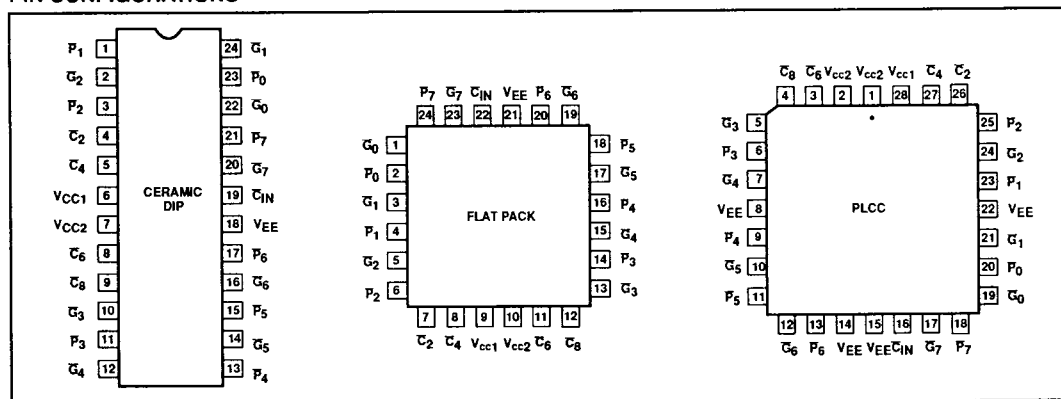

Carry Look-Ahead Generator

100179

LOGIC DIAGRAM

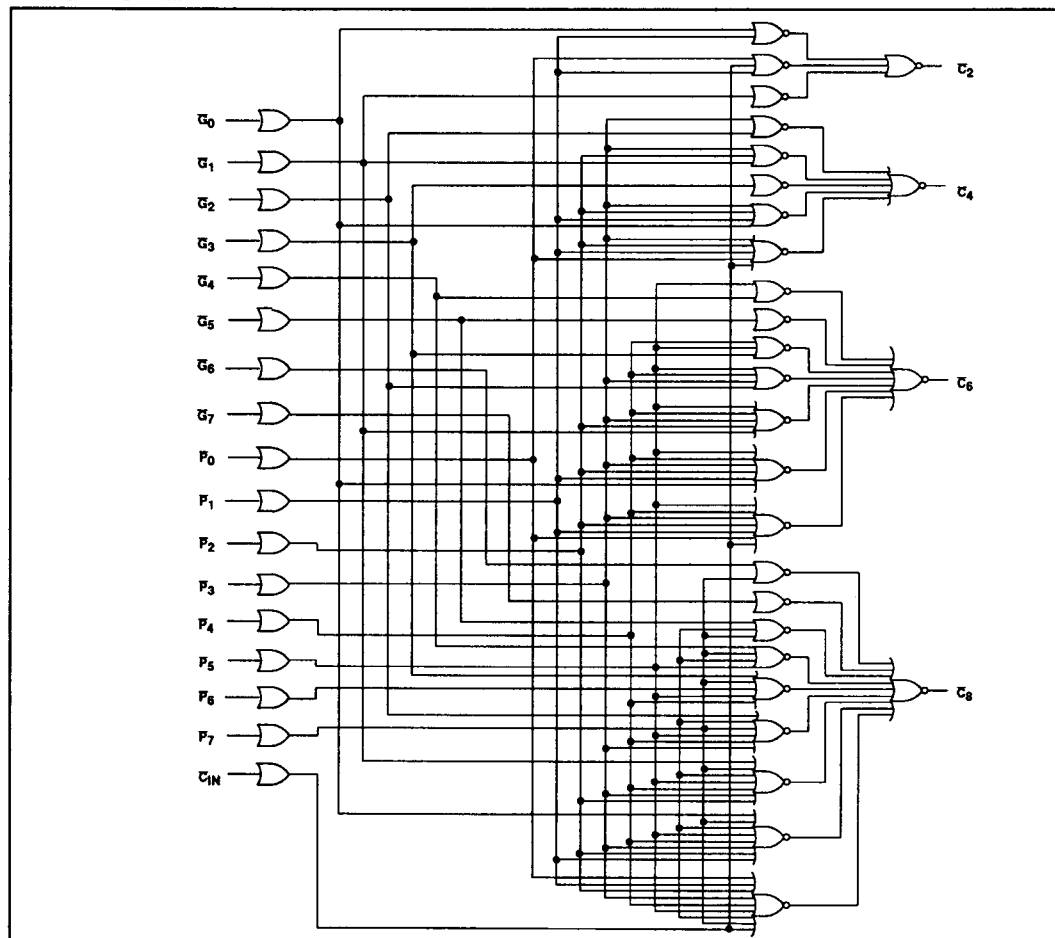FUNCTION TABLE FOR C_2 OUTPUT

INPUTS					OUTPUT
C_{IN}	G_0	P_0	G_1	P_1	C_2
X	X	X	L	X	L
X	L	X	X	L	L
L	X	L	X	L	L
All other combinations					H

NOTES:

$$C_2 = G_1 \cdot (P_1 + G_0) + (P_1 + P_0 + C_{IN})$$

H = High voltage level

L = Low voltage level

X = Don't care

Carry Look-Ahead Generator

100179

FUNCTION TABLE FOR $\bar{C}_4$ OUTPUT

INPUTS									OUTPUT
$\bar{C}_{IN}$	$\bar{G}_0$	$\bar{P}_0$	$\bar{G}_1$	$\bar{P}_1$	$\bar{G}_2$	$\bar{P}_2$	$\bar{G}_3$	$\bar{P}_3$	$\bar{C}_4$
X	X	X	X	X	X	X	L	X	L
X	X	X	X	X	L	X	X	L	L
X	X	X	L	X	X	L	X	L	L
X	L	X	X	L	X	L	X	L	L
L	X	L	X	L	X	L	X	L	L
All other combinations									H

NOTES:

$$\bar{C}_4 = \bar{G}_3 \cdot (\bar{P}_3 + \bar{G}_2) \cdot (\bar{P}_3 + \bar{P}_2 + \bar{G}_1) \cdot (\bar{P}_3 + \bar{P}_2 + \bar{P}_1 + \bar{G}_0) \cdot (\bar{P}_3 + \bar{P}_2 + \bar{P}_1 + \bar{P}_0 + \bar{C}_{IN})$$

H = High voltage level

L = Low voltage level

X = Don't care

FUNCTION TABLE FOR $\bar{C}_6$ OUTPUT

INPUTS													OUTPUT
$\overline{C}_{IN}$	$\overline{G}_0$	$\overline{P}_0$	$\overline{G}_1$	$\overline{P}_1$	$\overline{G}_2$	$\overline{P}_2$	$\overline{G}_3$	$\overline{P}_3$	$\overline{G}_4$	$\overline{P}_4$	$\overline{G}_5$	$\overline{P}_5$	$\overline{C}_6$
X	X	X	X	X	X	X	X	X	X	X	L	X	L
X	X	X	X	X	X	X	X	X	L	X	X	L	L
X	X	X	X	X	X	X	L	X	X	L	X	L	L
X	X	X	X	X	L	X	X	L	X	L	X	L	L
X	X	X	L	X	X	L	X	L	X	L	X	L	L
X	L	X	X	L	X	L	X	L	X	L	X	L	L
L	X	L	X	L	X	L	X	L	X	L	X	L	L
All other combinations													H

NOTES:

$$\bar{C}_6 = \bar{G}_5 \cdot (\bar{P}_5 + \bar{G}_4) \cdot (\bar{P}_5 + \bar{P}_4 + \bar{G}_3) \cdot (\bar{P}_5 + \bar{P}_4 + \bar{P}_3 + \bar{G}_2) \cdot (\bar{P}_5 + \bar{P}_4 + \bar{P}_3 + \bar{P}_2 + \bar{G}_1) \cdot (\bar{P}_5 + \bar{P}_4 + \bar{P}_3 + \bar{P}_2 + \bar{P}_1 + \bar{G}_0) \cdot (\bar{P}_5 + \bar{P}_4 + \bar{P}_3 + \bar{P}_2 + \bar{P}_1 + \bar{P}_0 + \bar{C}_{IN})$$

H = High voltage level

L = Low voltage level

X = Don't care

Carry Look-Ahead Generator

100179

FUNCTION TABLE FOR $\bar{C}_8$ OUTPUT

INPUTS																	OUTPUT
$\bar{C}_{IN}$	$\bar{G}_0$	$\bar{P}_0$	$\bar{G}_1$	$\bar{P}_1$	$\bar{G}_2$	$\bar{P}_2$	$\bar{G}_3$	$\bar{P}_3$	$\bar{G}_4$	$\bar{P}_4$	$\bar{G}_5$	$\bar{P}_5$	$\bar{G}_6$	$\bar{P}_6$	$\bar{G}_7$	$\bar{P}_7$	$\bar{C}_8$
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	L	X	L
X	X	X	X	X	X	X	X	X	X	X	X	X	L	X	X	L	L
X	X	X	X	X	X	X	X	X	X	X	L	X	X	L	X	L	L
X	X	X	X	X	X	X	X	X	L	X	X	L	X	L	X	L	L
X	X	X	X	X	X	X	L	X	X	L	X	L	X	L	X	L	L
X	X	X	X	X	L	X	X	L	X	L	X	L	X	L	X	L	L
X	X	X	L	X	X	L	X	L	X	L	X	L	X	L	X	L	L
X	L	X	X	L	X	L	X	L	X	L	X	L	X	L	X	L	L
L	X	L	X	L	X	L	X	L	X	L	X	L	X	L	X	L	L
All other combinations																	H

NOTES:

$$\bar{C}_8 = \bar{G}_7 \cdot (\bar{P}_7 + \bar{G}_6) \cdot (\bar{P}_7 + \bar{P}_6 + \bar{G}_5) \cdot (\bar{P}_7 + \bar{P}_6 + \bar{P}_5 + \bar{G}_4) \cdot (\bar{P}_7 + \bar{P}_6 + \bar{P}_5 + \bar{P}_4 + \bar{G}_3) \cdot (\bar{P}_7 + \bar{P}_6 + \bar{P}_5 + \bar{P}_4 + \bar{P}_3 + \bar{G}_2) \cdot$$

$$(\bar{P}_7 + \bar{P}_6 + \bar{P}_5 + \bar{P}_4 + \bar{P}_3 + \bar{P}_2 + \bar{G}_1) \cdot (\bar{P}_7 + \bar{P}_6 + \bar{P}_5 + \bar{P}_4 + \bar{P}_3 + \bar{P}_2 + \bar{P}_1 + \bar{G}_0) \cdot (\bar{P}_7 + \bar{P}_6 + \bar{P}_5 + \bar{P}_4 + \bar{P}_3 + \bar{P}_2 + \bar{P}_1 + \bar{P}_0 + \bar{C}_{IN})$$

H = High Voltage Level

L = Low Voltage Level

X = Don't care

ABSOLUTE MAXIMUM RATINGS $V_{CC1} = V_{CC2} = \text{ground}$, $T_A = 0^\circ\text{C}$ to $+85^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	LIMITS	UNIT
V_{EE}	Supply voltage range	-7.0 to +0.5	V
V_{IN}	Input voltage (V_{IN} should never be more negative than V_{EE})	V_{EE} to +0.5	V
I_O	Output source current (continuous)	-55	mA
T_S	Storage temperature range	-65 to +150	$^\circ\text{C}$
T_J	Maximum junction temperature	+150	$^\circ\text{C}$

NOTE:

Operation beyond the limits set forth in this table may impair the useful life of the device.

DC OPERATING CONDITIONS

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS			UNIT
			MIN.	NOM.	MAX.	
V_{CC1}, V_{CC2}	Circuit ground		0	0	0	V
V_{EE}	Supply voltage		-4.8	-4.5	-4.2	V
V_{EE}	Supply voltage when operating with the 10K or the 10KH ECL family		-5.7			V
V_{IH}	High level input voltage	$V_{EE} = -4.2\text{V}$	-1150		-880	mV
		$V_{EE} = -4.5\text{V}$	-1165			
		$V_{EE} = -4.8\text{V}$	-1165			
V_{IL}	Low level input voltage	$V_{EE} = -4.2\text{V}$	-1810		-1475	mV
		$V_{EE} = -4.5\text{V}$			-1475	mV
		$V_{EE} = -4.8\text{V}$			-1490	mV
T_A	Operating ambient temperature range		0	+25	+85	$^\circ\text{C}$

NOTE:

When operating at other than the specified V_{EE} voltages (-4.2V, -4.5V, -4.8V), the DC and AC electrical characteristics will vary slightly from their specified values.

Carry Look-Ahead Generator

100179

DC ELECTRICAL CHARACTERISTICS $V_{CC1} = V_{CC2} = \text{ground}$, $V_{EE} = -4.8\text{V}$ to -4.2V , $T_A = 0^\circ\text{C}$ to $+85^\circ\text{C}$ unless otherwise specified^{1,3,4}

SYMBOL	PARAMETER			TEST CONDITIONS ²	LIMITS				UNIT	
					MIN.	TYP.	MAX.			
V _{OH}	High level output voltage		Outputs Loaded with 50Ω to -2.0V ±0.010V	Inputs at V _{IHMAX} or V _{ILMIN} .	V _{EE} = -4.2V	-1020		-870	mV	
					V _{EE} = -4.5V	-1025	-955	-880	mV	
						V _{EE} = -4.8V	-1035		-880	mV
V _{OHT}	High level output threshold voltage			Apply V _{IHMIN} or V _{ILMAX} to one input at a time, other inputs at V _{IHMAX} or V _{ILMIN} .	V _{EE} = -4.2V	-1030				mV
					V _{EE} = -4.5V	-1035				mV
					V _{EE} = -4.8V	-1045				mV
V _{OLT}	Low level output threshold voltage			Apply V _{IHMIN} or V _{ILMAX} to one input at a time, other inputs at V _{IHMAX} or V _{ILMIN} .	V _{EE} = -4.2V				-1595	mV
					V _{EE} = -4.5V				-1610	mV
					V _{EE} = -4.8V				-1610	mV
V _{OL}	Low level output voltage			Inputs at V _{IHMAX} or V _{ILMIN} .	V _{EE} = -4.2V	-1810			-1605	mV
					V _{EE} = -4.5V	-1810	-1705		-1620	mV
					V _{EE} = -4.8V	-1830			-1620	mV
I _{IH}	High level input current	C _{IN} , G ₀ - G ₇	One input under test at V _{IHMAX} , other inputs at V _{ILMIN} .					250	μA	
			P ₀ - P ₇	One input under test at V _{IHMAX} , other inputs at V _{ILMIN} .					340	μA
I _{IL}	Low level input current		One input under test at V _{ILMIN} , other inputs at V _{IHMAX} .		0.5				μA	
-I _{EE}	V _{EE} supply current		All inputs at V _{IHMAX} .		100	150	220		mA	

NOTES:

1. The specified limits represent the worst case values for the parameter. Since these worst case values normally occur at the supply voltage and temperature extremes, additional noise immunity can be achieved by decreasing the allowable operating condition ranges.
2. Conditions for testing shown in the tables are not necessarily worst case. For worst case testing guidelines, refer to DC Testing, Chapter 1, Section 3.
3. The specified limits shown in the DC electrical characteristics table can be met only after thermal equilibrium has been established. Thermal equilibrium is established by applying power for at least 2 minutes, while maintaining transverse airflow of 2.5 meters/sec (500 linear feet/min) over the device, mounted either in a test socket or on a printed circuit board. Test voltage values are given in the DC operating conditions table.
4. The device can function down to $V_{EE} = -5.7\text{V}$, allowing operation with either the 10K or the 10KH family. Correction factors can be used to calculate new DC limits for the extended V_{EE} range. For more information, see Chapters 5 and 10, Section 4.

Carry Look-Ahead Generator

100179

AC ELECTRICAL CHARACTERISTICS

Ceramic DIP $V_{CC1} = V_{CC2} = \text{ground}$, $V_{EE} = -4.8\text{V to } -4.2\text{V}$

SYMBOL	PARAMETER	TEST CONDITION	LIMITS						UNIT
			T _A = 0°C		T _A = +25°C		T _A = +85°C		
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	
t _{PLH} t _{PHL}	Propagation delay C _{IN} , G _n , P _n to C ₂ , C ₄ , C ₆ , C ₈	Waveform 1	1.10 1.10	2.90 2.90	1.10 1.10	2.90 2.90	1.10 1.10	3.00 3.00	ns ns
t _{TLH} t _{THL}	Transition time C ₂ , C ₄ , C ₆ , C ₈		0.45 0.45	1.80 1.80	0.45 0.45	1.80 1.80	0.45 0.45	1.80 1.80	ns ns

NOTE:

For AC test setup information, see AC Testing, Chapter 2, Section 3.

AC ELECTRICAL CHARACTERISTICS

Ceramic DIP $V_{CC1} = V_{CC2} = \text{ground}$, $V_{EE} = -5.2\text{V} \pm 5\%$

SYMBOL	PARAMETER	TEST CONDITION	LIMITS						UNIT
			T _A = 0°C		T _A = +25°C		T _A = +85°C		
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	
t _{PLH} t _{PHL}	Propagation delay C _{IN} , G _n , P _n to C ₂ , C ₄ , C ₆ , C ₈	Waveform 1	1.10 1.10	2.90 2.90	1.10 1.10	2.90 2.90	1.10 1.10	3.00 3.00	ns ns
t _{TLH} t _{THL}	Transition time C ₂ , C ₄ , C ₆ , C ₈		0.45 0.45	1.80 1.80	0.45 0.45	1.80 1.80	0.45 0.45	1.80 1.80	ns ns

NOTE:

For AC test setup information, see AC Testing, Chapter 2, Section 3.

AC ELECTRICAL CHARACTERISTICS

Flat Pack and PLCC $V_{CC1} = V_{CC2} = \text{ground}$, $V_{EE} = -4.8\text{V to } -4.2\text{V}$

SYMBOL	PARAMETER	TEST CONDITION	LIMITS						UNIT
			T _A = 0°C		T _A = +25°C		T _A = +85°C		
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	
t _{PLH} t _{PHL}	Propagation delay C _{IN} , G _n , P _n to C ₂ , C ₄ , C ₆ , C ₈	Waveform 1	1.10 1.10	2.70 2.70	1.10 1.10	2.70 2.70	1.10 1.10	2.80 2.80	ns ns
t _{TLH} t _{THL}	Transition time C ₂ , C ₄ , C ₆ , C ₈		0.45 0.45	1.70 1.70	0.45 0.45	1.70 1.70	0.45 0.45	1.70 1.70	ns ns

NOTE:

For AC test setup information, see AC Testing, Chapter 2, Section 3.

AC ELECTRICAL CHARACTERISTICS

Flat Pack and PLCC $V_{CC1} = V_{CC2} = \text{ground}$, $V_{EE} = -5.2\text{V} \pm 5\%$

SYMBOL	PARAMETER	TEST CONDITION	LIMITS						UNIT
			T _A = 0°C		T _A = +25°C		T _A = +85°C		
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	
t _{PLH} t _{PHL}	Propagation delay C _{IN} , G _n , P _n to C ₂ , C ₄ , C ₆ , C ₈	Waveform 1	1.10 1.10	2.70 2.70	1.10 1.10	2.70 2.70	1.10 1.10	2.80 2.80	ns ns
t _{TLH} t _{THL}	Transition time C ₂ , C ₄ , C ₆ , C ₈		0.45 0.45	1.70 1.70	0.45 0.45	1.70 1.70	0.45 0.45	1.70 1.70	ns ns


NOTE:

For AC test setup information, see AC Testing, Chapter 2, Section 3.

Carry Look-Ahead Generator

100179

AC WAVEFORMS

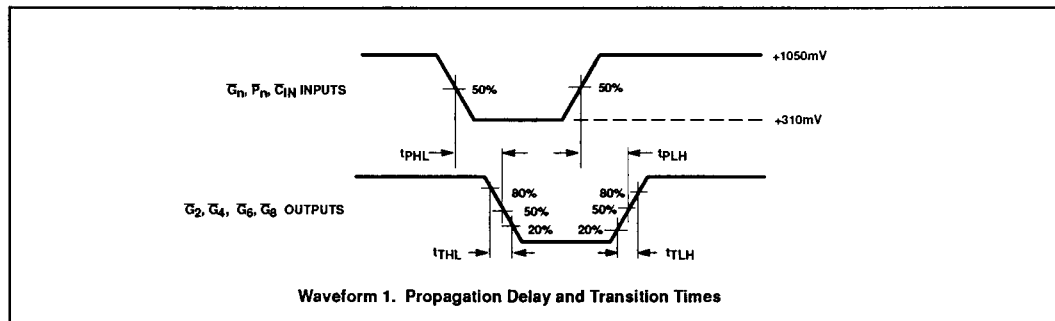

NOTE:

All power and signal voltages shifted up 2.0V for AC bench test purposes.

APPLICATIONS INFORMATION

