




Product Description

Stanford Microdevices' SSW-124 is a high performance Gallium Arsenide Field Effect Transistor MMIC switch housed in a low-cost surface-mountable 8-pin ceramic package.

This single-pole, double-throw, non-reflective switch consumes less than 50 μ A and operates at -5V and 0V for control bias. Its high isolation and low insertion loss, makes it ideal for T/R switching in analog and digital wireless communication systems.

The die is fabricated using 0.5 micron FET process with gold metallization and silicon nitride passivation to achieve excellent performance and reliability.

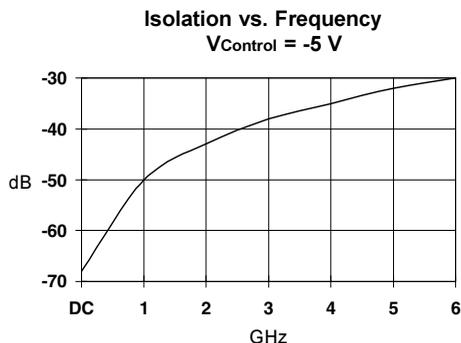

SSW-124

DC-6 GHz High Isolation SPDT GaAs MMIC Switch



Product Features

- High Isolation: 42dB at 2GHz, 30dB at 6GHz
- Low DC Power Consumption
- Non-reflective (50 Ohm termination) when Isolated
- Broadband Performance - True DC Operation
- Low Cost Surface-Mountable Ceramic Package

Applications

- Analog/Digital Wireless System
- Spread Spectrum
- GPS

Electrical Specifications at Ta = 25C

Symbol	Parameters: Test Conditions		Units	Min.	Typ.	Max.
Ins	Insertion Loss	f = 0.05-2.0GHz	dB		0.7	1.1
		f = 2.00-4.0GHz	dB		1.0	1.5
		f = 4.00-6.0GHz	dB		1.4	
Isol	Isolation	f = 0.05-2.0GHz	dB	40	50	
		f = 2.00-4.0GHz	dB	30	40	
		f = 4.00-6.0GHz	dB	25	30	
VSWR on	Input & Output VSWR (on or low loss state)	f = 0.05-2.0GHz			1.15	
		f = 2.00-4.0GHz			1.25	
		f = 4.00-6.0GHz			1.50	
VSWR off	Input & Output VSWR (off or isolated state)	f = 0.05-1.0GHz			1.15	
		f = 1.00-2.0GHz			1.25	
		f = 2.00-4.0GHz			1.50	
P1dB	Output Power at 1dB Compression f= 0.5-6.0GHz	V = -5V	dBm		+26	
		V = -8V	dBm		+29	
TOIP	Third Order Intercept Point f= 0.5-6.0GHz	V = -5V	dB		+45	
		V = -8V	dB		+48	
Id	Device Current		μ A		40	
Isw	Switching Speed 50% control to 10%/90%RF		nsec		3	

The information provided herein is believed to be reliable at press time. Stanford Microdevices assumes no responsibility for inaccuracies or omissions.

Stanford Microdevices assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Stanford Microdevices does not authorize or warrant any Stanford Microdevices product for use in life-support devices and/or systems.

Copyright 2000 Stanford Microdevices, Inc. All worldwide rights reserved.

522 Almanor Ave., Sunnyvale, CA 94085

Phone: (800) SMI-MMIC

<http://www.stanfordmicro.com>





SSW-124 DC-6.0 GHz GaAs MMIC Switches

Absolute Maximum Ratings


Operation of this device above any one of these parameters may cause permanent damage.

RF Input Power	2W Max>500MHz
Control Voltage	-10V
Operating Temperature	-45C to +85C
Storage Temperature	-65C to +150C
Thermal Resistance	20 deg C/W

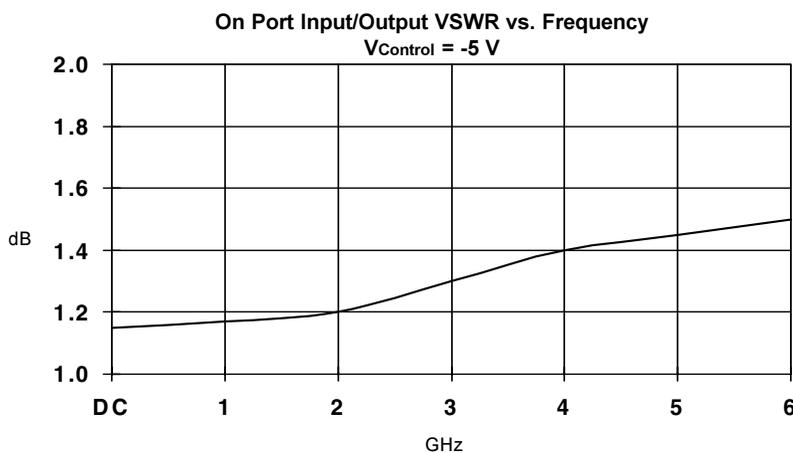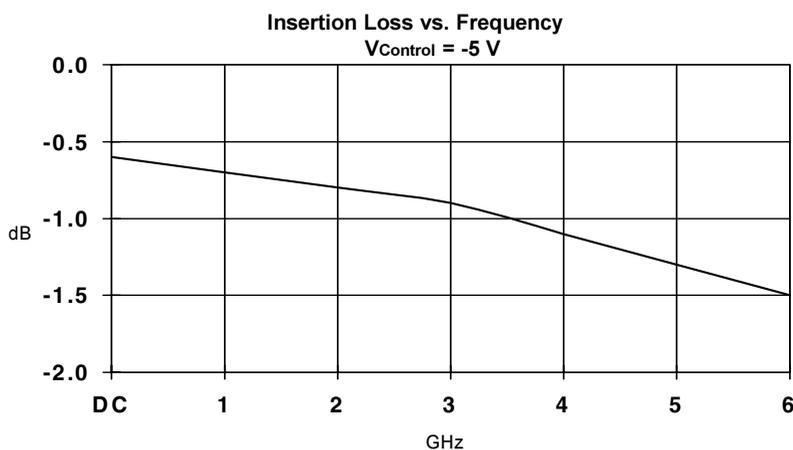

**Caution ESD Sensitive:**

Appropriate precautions in handling, packaging and testing devices must be observed.

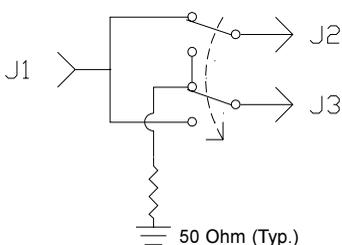Switch Schematic**SSW-124 DC-6.0 GHz GaAs MMIC Switches****Part Number Ordering Information**

Part Number	Devices Per Reel	Reel Size
SSW-124	500	7"

Truth Table


V1	V2	J1-J2	J1-J3
0	-5	Low Loss	Isolation
-5	0	Isolation	Low Loss

Part Symbolization

The part will be symbolized with a "W1" designator on the top surface of the package.

Package Dimensions**Pin Out**

Pin	Function	Description
1	GND	Ground
2	J1	RF in
3	GND	Ground
4	GND	Ground
5	J2	RF out 1
6	V1	Control 1
7	V2	Control 2
8	J3	RF out 2

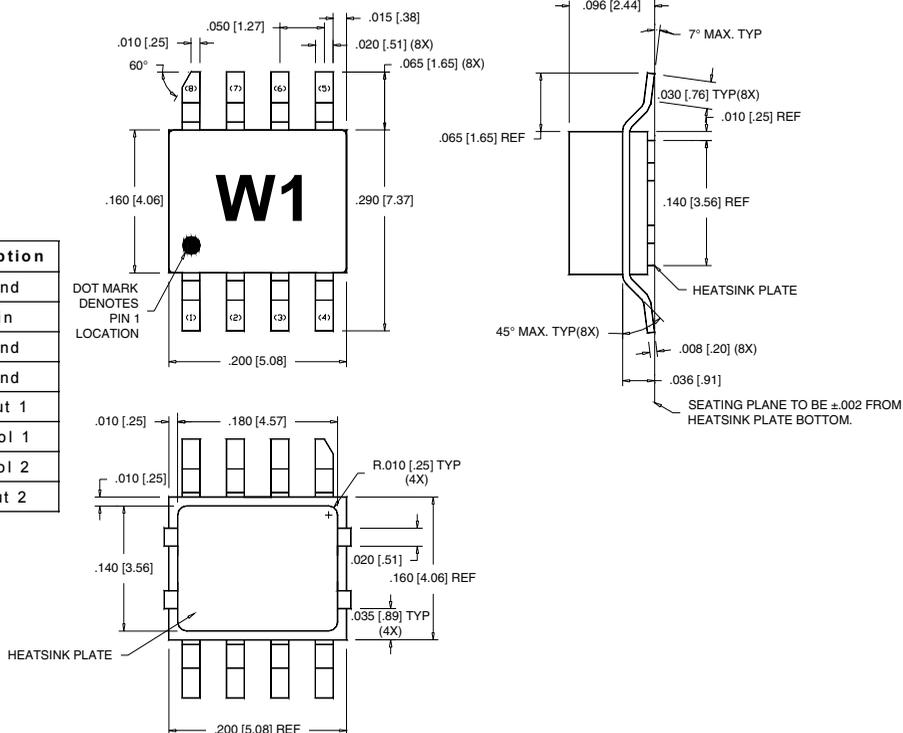

DIMENSIONS ARE IN INCHES [MM]

www.DataSheet4U.com