

# SIEMENS

## Product data sheet

## 3RH1122-1AF00



Abb. ähnlich / similar picture

CONTACTOR RELAY, 2NO+2NC, AC 110 V,  
50 HZ, SCREW CONNECTION, SIZE S00

### General details:

Size of the contactor S00

### Control circuit:

Type of voltage AC

### Control supply voltage

- at 50 Hz / for AC / rated value / minimum 110 V
- at 50 Hz / for AC / rated value / maximum 110 V
- at 60 Hz / for AC / rated value / minimum 110 V
- at 60 Hz / for AC / rated value / maximum 110 V

### Supply voltage frequency / for auxiliary and control current circuit / rated value

- minimum 50 Hz
- maximum 60 Hz

### Main circuit:

#### Operating current


- at AC-14 / at AC-15 / at 230 V / rated value 6 A

### Auxiliary circuit:

Identification number and letter for switching elements 22 E

Number of NO contacts / for auxiliary contact 2

• delayed switching	0
• asynchronous switching	0
Number of NC contacts / for auxiliary contact	2
• delayed switching	0
• asynchronous switching	0
Number of change-over switches / for auxiliary contact	0
<b>Connection type:</b>	
Design of the electrical connection / for auxiliary and control current circuit	screw-type terminals
<b>Mechanical design:</b>	
Type of fixing/fixation	screw and snap-on mounting

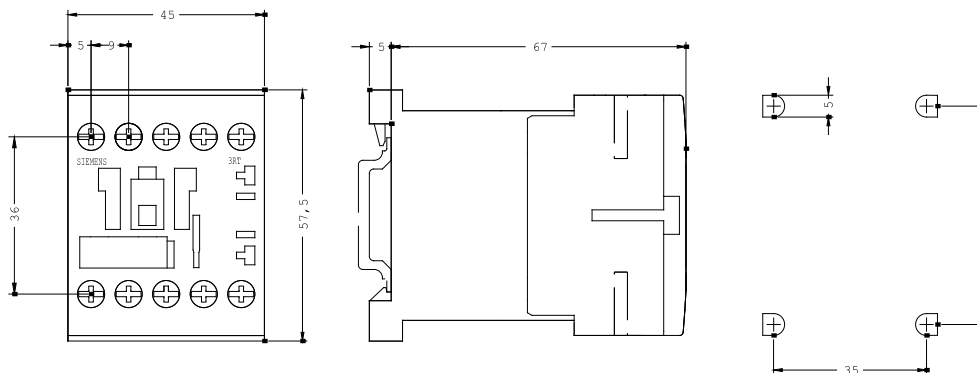

**last change:**

10/31/2006

<b>Technical Assistance:</b>	Telephone:	+49 (0) 911-895-5900 (8°° - 17°° CET)
	Fax:	+49 (0) 911-895-5907
	E-Mail:	technical-assistance@siemens.com
	Internet:	<a href="http://www.siemens.de/lowvoltage/technical-assistance">www.siemens.de/lowvoltage/technical-assistance</a>