



SAW Components

Data Sheet B3606

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a blue glow and are positioned diagonally across the frame. In the background, there is a faint, stylized globe and some circuitry patterns, all in a dark, monochromatic color scheme.



SAW Components

B3606

Low-Loss Filter

140,00 MHz

Data Sheet


Ceramic package **QCC 12**

Features

- High performance IF bandpass filter
- Constant group delay
- Hermetically sealed ceramic package

Terminals

- Gold plated

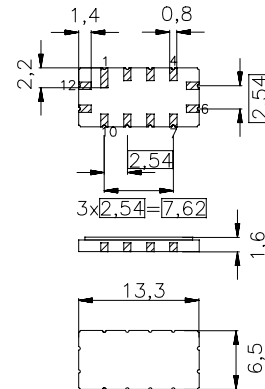


Dimensions in mm, approx. weight 0,4 g

Pin configuration

11	Input or balanced input
1	Input - ground or balanced input
5	Output or balanced output
7	Output - ground or bal. output
2, 6, 8, 12	Case ground
3, 4, 9, 10	Ground

Note: Input and output port can be mixed up



Type	Ordering code	Marking and Package according to	Packing according to
B3606	B39141-B3606-Z510	C61157-A7-A55	F61074-V8026-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40/+ 85	°C	
Storage temperature range	T_{stg}	- 55/+ 125	°C	
DC voltage	V_{DC}	0	V	
Source power	P_s	10	dBm	source impedance 50 Ω



SAW Components	B3606
Low-Loss Filter	140,00 MHz

Data Sheet

Characteristics

Operating temperature: $T = -40^{\circ}\text{C} \dots 85^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50 \ \Omega$ and matching circuit
Terminating load impedance: $Z_L = 50 \ \Omega$ and matching circuit
TTI=Triple transit signal included; TTE=Triple transit signal excluded

		min.	typ.	max.	
Center frequency	f_C	139,75	140,00	140,25	MHz
(Center between 6dB points; @ $T = 25^{\circ}\text{C}$)					
Insertion attenuation at f_C	α_C	—	11,0	13,0	dB
Amplitude ripple (TTI, p-p)	$\Delta\alpha$				
130,0 ... 150,0 MHz		—	0,6	0,9	dB
Pass bandwidth					
$\alpha_{\text{rel}} \leq 3 \text{ dB}$	$B_{3\text{dB}}$	—	25,5	—	MHz
Phase ripple (TTE, p-p)	$\Delta\phi$				
130,0 ... 150,0 MHz		—	8,0	9,5	$^{\circ}$
131,0 ... 149,0 MHz		—	6,0	7,0	$^{\circ}$
Relative attenuation (relative to α_C)	α_{rel}				
100,0 ... 108,0 MHz		40,0	50,0	—	dB
108,0 ... 116,0 MHz		40,0	48,0	—	dB
116,0 ... 121,5 MHz		40,0	44,0	—	dB
158,5 ... 164,0 MHz		37,0	40,0	—	dB
164,0 ... 172,0 MHz		39,0	42,0	—	dB
172,0 ... 180,0 MHz		40,0	47,0	—	dB
Reflected wave signal suppression					
0,72 μs ... 0,62 μs before main pulse		45,0	50,0	—	dB
Reflected wave signal suppression					
0,62 μs ... 2,88 μs after main pulse		33,0	37,0	—	dB
Group delay at f_C	τ_C	0,71	0,72	0,73	μs
Group delay ripple (TTE, p-p)	$\Delta\tau$				
130,0 ... 150,0 MHz		—	15,0	—	ns
Temperature coefficient of frequency	TC_f	—	- 87	—	ppm/K



SAW Components


B3606

Low-Loss Filter

140,00 MHz


Data Sheet

Matching circuit: unbalanced - unbalanced

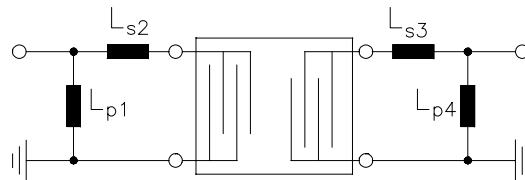

$L_{p1}=47\text{nH}$
 $L_{s2}=10\text{nH}$
 $L_{s3}=10\text{nH}$
 $L_{p4}=47\text{nH}$

Matching circuit: balanced - balanced

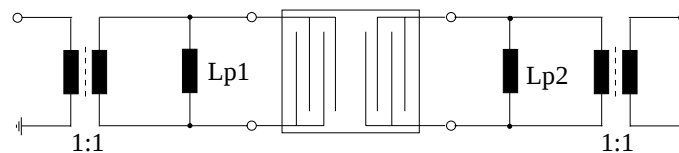

$L_{p1}=62\text{nH}$
 $L_{p2}=62\text{nH}$

Note: Component values depend on PCB layout.



SAW Components


B3606

Low-Loss Filter


140,00 MHz



Data Sheet

Normalized frequency response (Triple transit signal excluded)

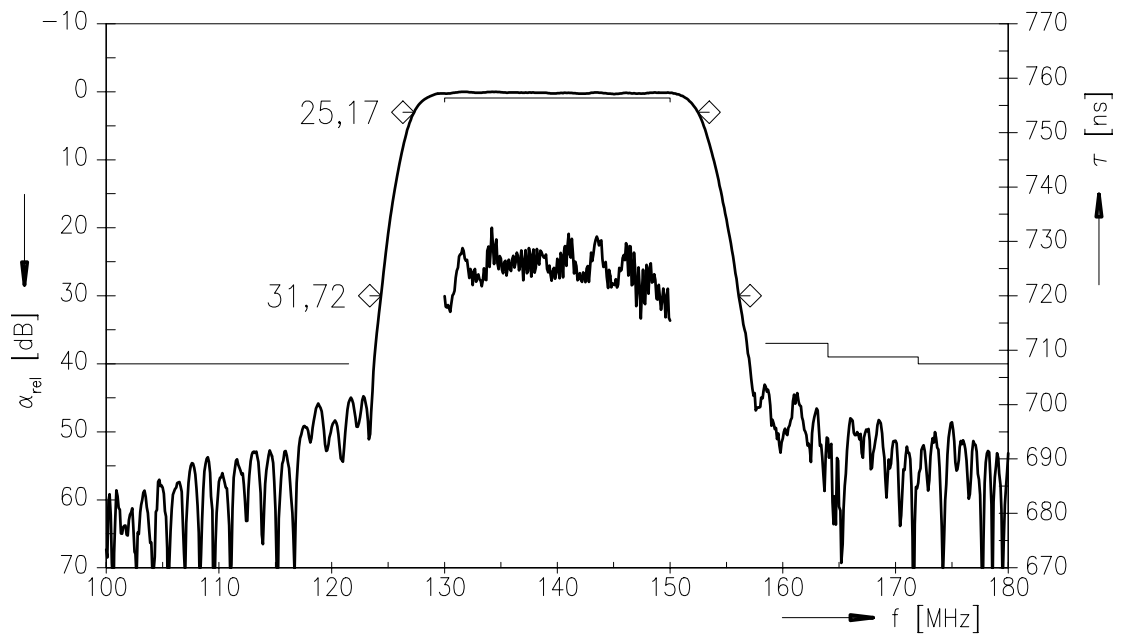

Normalized frequency response (Triple transit signal included)

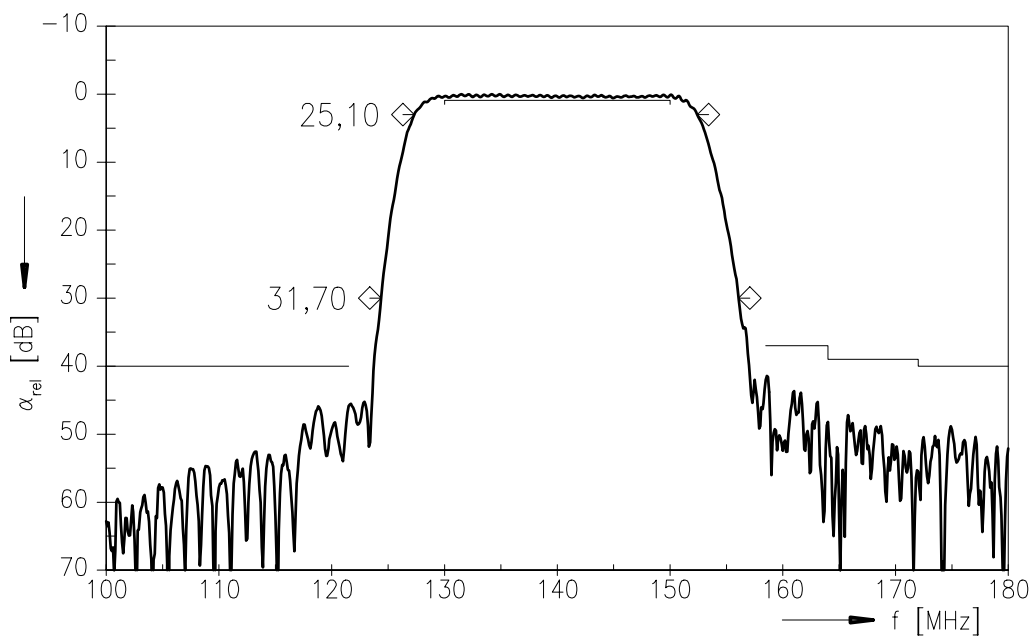

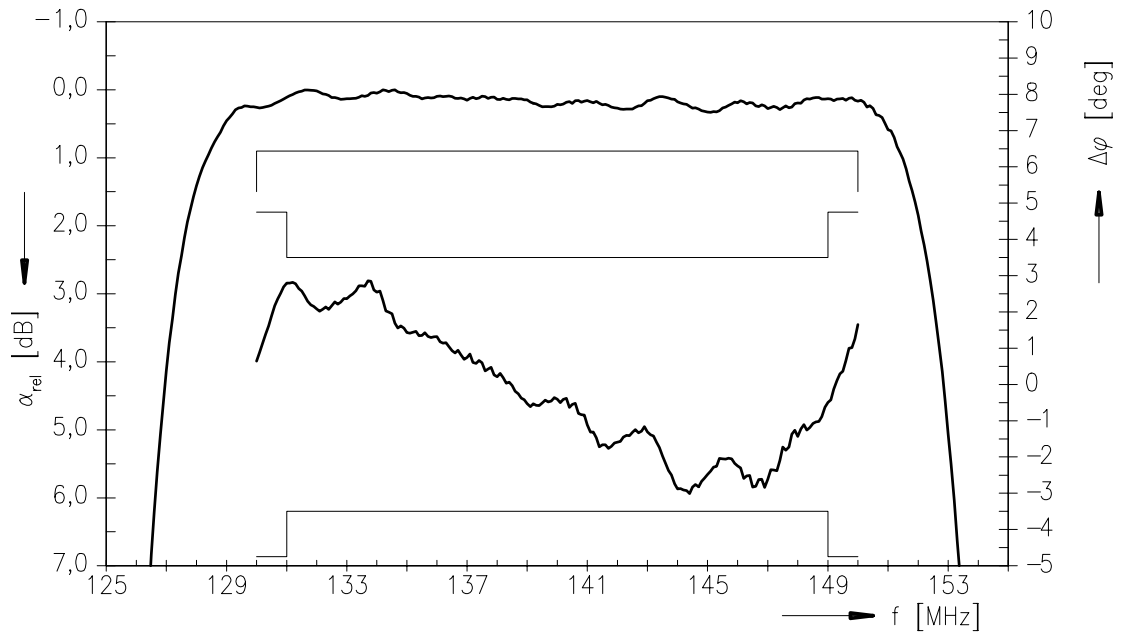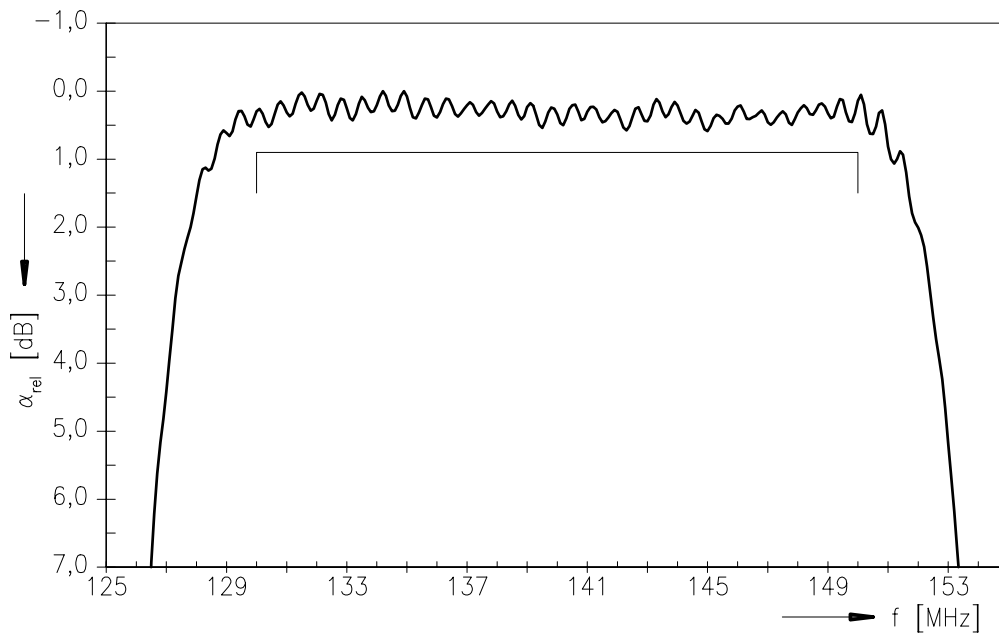**SAW Components****B3606****Low-Loss Filter****140,00 MHz****Data Sheet****Normalized frequency response (Triple transit signal excluded)****Normalized frequency response (Triple transit signal included)**



SAW Components


B3606

Low-Loss Filter

140,00 MHz

Data Sheet

Normalized time response

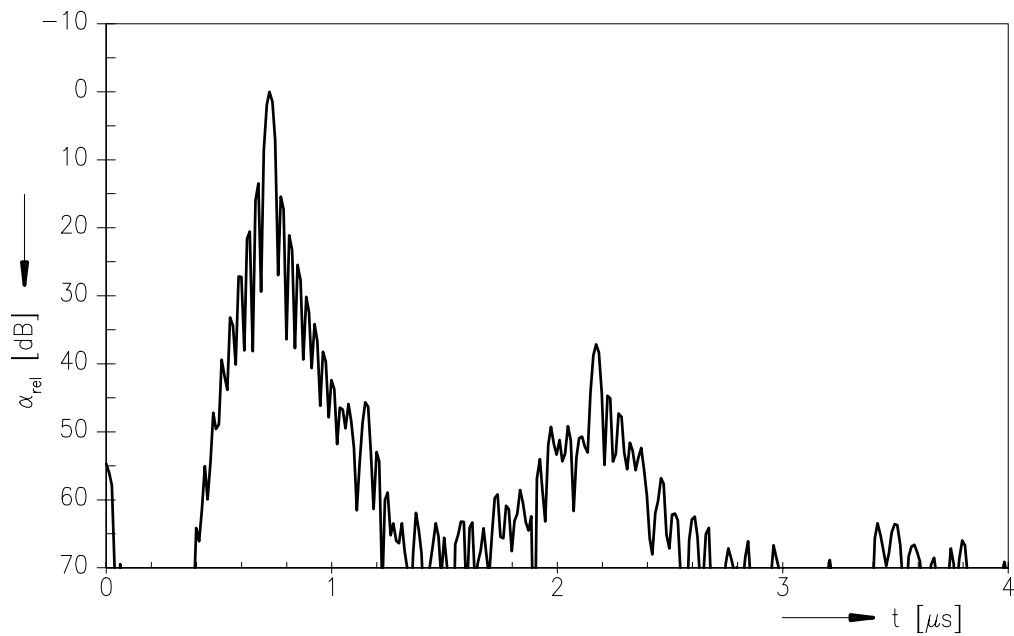



SAW Components	B3606
Low-Loss Filter	140,00 MHz

Data Sheet

Attachment

1) Pyroelectric pulse amplitude < 50 mV.



SAW Components

B3606

Low-Loss Filter

140,00 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC IS PD

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.