



SAW Components

Data Sheet B7707, Pb-Free

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a bright, circular highlight in the center of each, giving them a three-dimensional appearance. They are set against a dark, textured background that includes a faint, stylized globe and a curved, metallic-looking structure that resembles a satellite dish or a modern architectural element. The overall effect is high-tech and futuristic.



SAW Components

B7707

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet




Chip Sized SAW Package DCS4H

Features

- Low-loss RF filter for mobile telephone EGSM systems, receive path
- Low amplitude ripple
- Usable passband 35 MHz
- No matching network required for operation at 50 Ω
- Suitable for GPRS class 1 to 12
- Package for **Surface Mounted Technology (SMT)**
- Pb-Free

Terminals


- Ni, gold-plated

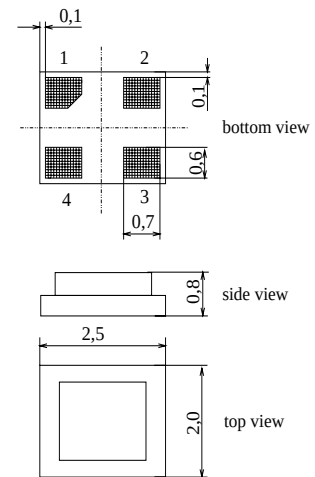

Dimensions in mm, approx. weight 0,015g

Pin configuration

- | | |
|-----|--------|
| 1 | Input |
| 3 | Output |
| 2,4 | Ground |



Type	Ordering code	Marking and Package according to	Packing according to
B7707	B39941-B7707-K710	C61157-A7-A136	F61074-V8189-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40 / + 85	$^{\circ}\text{C}$	Machine Model, 10 pulses peak power of GSM signal, duty cycle 4:8
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	3	V	
ESD voltage	V_{ESD}^{*}	100*	V	
Input power at	P_{IN}	15	dBm	
GSM850, GSM900, GSM1800 and GSM1900 Tx bands				

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B7707

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet



Characteristics

Operating temperature range: $T = 25 \pm 2 \text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50 \text{ } \Omega$
Terminating load impedance: $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
925,0 ... 960,0 MHz		—	2,8	3,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
925,0 ... 960,0 MHz		—	1,0	1,6	dB
Input VSWR					
925,0 ... 960,0 MHz		—	2,0	2,3	
Output VSWR					
925,0 ... 960,0 MHz		—	2,0	2,2	
Input return loss					
925,0 ... 960,0 MHz		8,0	9,0	—	dB
Input return loss phase					
1842,5 MHz		-150,0	-140,0	-130,0	°
Attenuation	α				
0,0 ... 750,0 MHz		50	66	—	dB
750,0 ... 800,0 MHz		46	69	—	dB
800,0 ... 880,0 MHz		45	54	—	dB
880,0 ... 905,0 MHz		31	60	—	dB
905,0 ... 915,0 MHz		17	33	—	dB
980,0 ... 982,0 MHz		23	26	—	dB
982,0 ... 1005,0 MHz		23	29	—	dB
1005,0 ... 1025,0 MHz		30	52	—	dB
1025,0 ... 1035,0 MHz		35	54	—	dB
1035,0 ... 1760,0 MHz		40	55	—	dB
1760,0 ... 3120,0 MHz		34	38	—	dB
3120,0 ... 4000,0 MHz		18	26	—	dB
4000,0 ... 6000,0 MHz		8	18	—	dB



SAW Components

B7707

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -20^{\circ}\text{C}$ to $+75^{\circ}\text{C}$

Terminating source impedance: $Z_S = 50\ \Omega$

Terminating load impedance: $Z_L = 50\ \Omega$

			min.	typ.	max.	
Center frequency	f_C		—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	925,0 ... 960,0 MHz		—	3,0	3,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	925,0 ... 960,0 MHz		—	1,2	1,8	dB
Input VSWR						
	925,0 ... 960,0 MHz		—	2,0	2,3	
Output VSWR						
	925,0 ... 960,0 MHz		—	2,0	2,2	
Input return loss						
	925,0 ... 960,0 MHz		8,0	9,0	—	dB
Input return loss phase						
	1842,5 MHz		-150,0	-140,0	-130,0	°
Attenuation	α					
	0,0 ... 750,0 MHz		50	66	—	dB
	750,0 ... 800,0 MHz		46	69	—	dB
	800,0 ... 880,0 MHz		45	54	—	dB
	880,0 ... 905,0 MHz		31	60	—	dB
	905,0 ... 915,0 MHz		17	24	—	dB
	980,0 ... 982,0 MHz		22	25	—	dB
	982,0 ... 1005,0 MHz		23	27	—	dB
	1005,0 ... 1025,0 MHz		30	52	—	dB
	1025,0 ... 1035,0 MHz		35	54	—	dB
	1035,0 ... 1760,0 MHz		40	55	—	dB
	1760,0 ... 3120,0 MHz		34	38	—	dB
	3120,0 ... 4000,0 MHz		18	26	—	dB
	4000,0 ... 6000,0 MHz		8	18	—	dB



SAW Components

B7707

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -30^{\circ}\text{C}$ to $+80^{\circ}\text{C}$

Terminating source impedance: $Z_S = 50\ \Omega$

Terminating load impedance: $Z_L = 50\ \Omega$

			min.	typ.	max.	
Center frequency	f_C		—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	925,0 ... 960,0 MHz		—	3,0	4,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	925,0 ... 960,0 MHz		—	1,2	2,3	dB
Input VSWR						
	925,0 ... 960,0 MHz		—	2,0	2,3	
Output VSWR						
	925,0 ... 960,0 MHz		—	2,0	2,2	
Input return loss						
	925,0 ... 960,0 MHz		8,0	9,0	—	dB
Input return loss phase						
	1842,5 MHz		-150,0	-140,0	-130,0	°
Attenuation	α					
	0,0 ... 750,0 MHz		50	66	—	dB
	750,0 ... 800,0 MHz		46	69	—	dB
	800,0 ... 880,0 MHz		45	54	—	dB
	880,0 ... 905,0 MHz		31	60	—	dB
	905,0 ... 915,0 MHz		15	23	—	dB
	980,0 ... 982,0 MHz		21	24	—	dB
	982,0 ... 1005,0 MHz		23	27	—	dB
	1005,0 ... 1025,0 MHz		30	52	—	dB
	1025,0 ... 1035,0 MHz		35	54	—	dB
	1035,0 ... 1760,0 MHz		40	55	—	dB
	1760,0 ... 3120,0 MHz		34	38	—	dB
	3120,0 ... 4000,0 MHz		18	26	—	dB
	4000,0 ... 6000,0 MHz		8	18	—	dB



SAW Components

B7707

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$

Terminating source impedance: $Z_S = 50\ \Omega$

Terminating load impedance: $Z_L = 50\ \Omega$

			min.	typ.	max.	
Center frequency	f_C		—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	925,0 ... 960,0 MHz		—	3,0	4,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	925,0 ... 960,0 MHz		—	1,2	2,3	dB
Input VSWR						
	925,0 ... 960,0 MHz		—	2,0	2,3	
Output VSWR						
	925,0 ... 960,0 MHz		—	2,0	2,2	
Input return loss						
	925,0 ... 960,0 MHz		8,0	9,0	—	dB
Input return loss phase						
	1842,5 MHz		-150,0	-140,0	-130,0	°
Attenuation	α					
	0,0 ... 750,0 MHz		50	66	—	dB
	750,0 ... 800,0 MHz		46	69	—	dB
	800,0 ... 880,0 MHz		45	54	—	dB
	880,0 ... 905,0 MHz		31	60	—	dB
	905,0 ... 915,0 MHz		12	22	—	dB
	980,0 ... 982,0 MHz		21	24	—	dB
	982,0 ... 1005,0 MHz		23	27	—	dB
	1005,0 ... 1025,0 MHz		30	52	—	dB
	1025,0 ... 1035,0 MHz		35	54	—	dB
	1035,0 ... 1760,0 MHz		40	55	—	dB
	1760,0 ... 3120,0 MHz		34	38	—	dB
	3120,0 ... 4000,0 MHz		18	26	—	dB
	4000,0 ... 6000,0 MHz		8	18	—	dB



SAW Components

B7707


Low-Loss Filter for Mobile Communication

942,50 MHz


Data Sheet



Transfer function (+25 C specification)

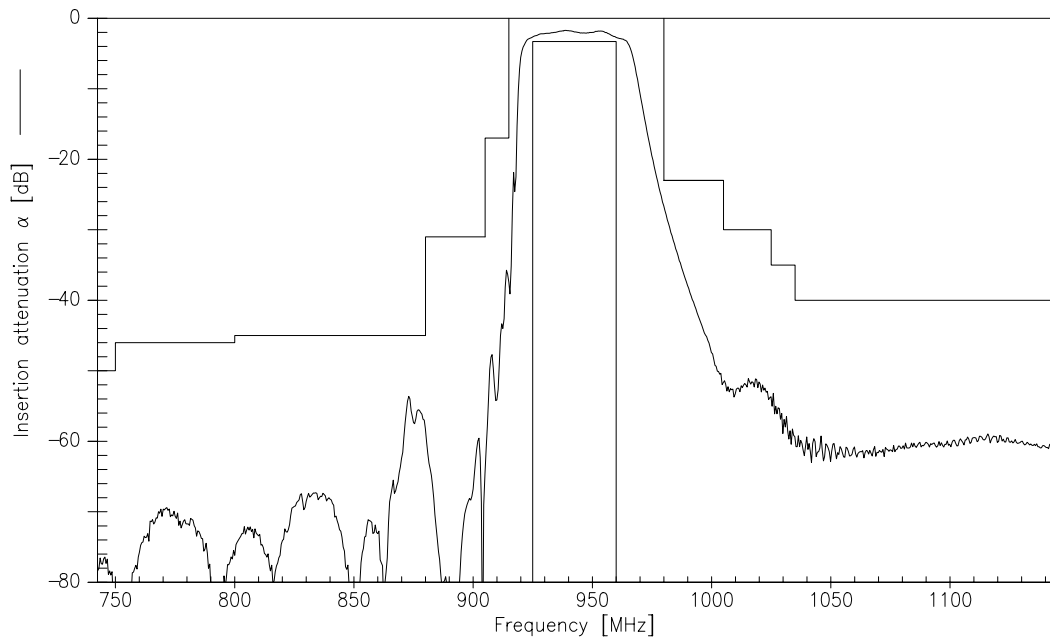

Transfer function (wideband)

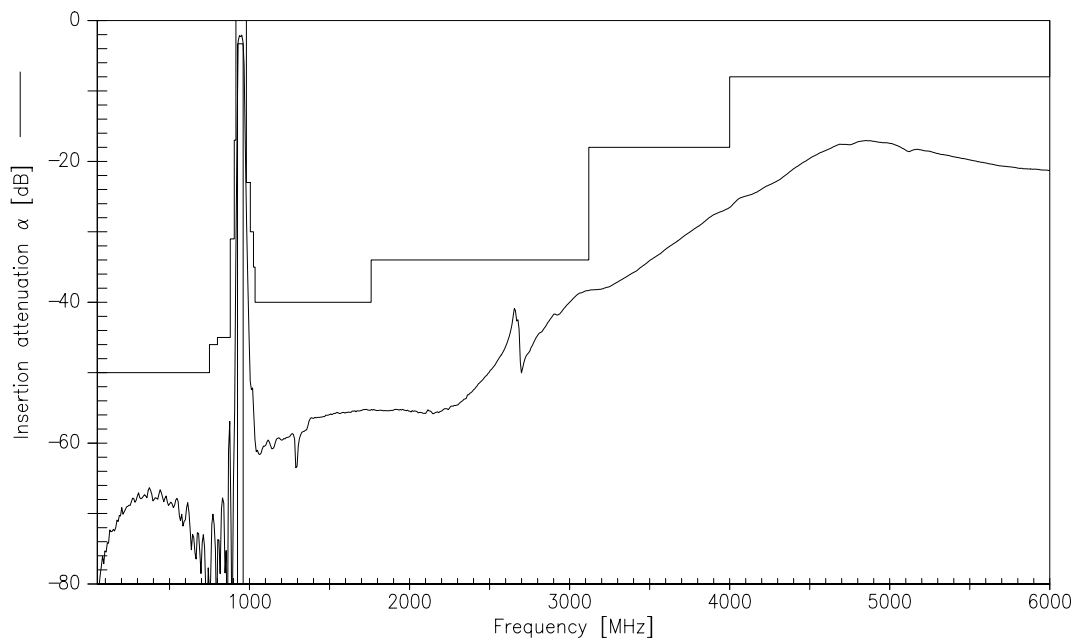



SAW Components

B7707

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC PD

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2005. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.