




H772

APPLICATIONS

Audio Frequency Power Amplifier , Switching Power Amplifier.

ABSOLUTE MAXIMUM RATINGS ($T_a=25$)

T_{stg} —Storage Temperature.....	-55~150
T_j —Junction Temperature.....	150
P_C —Collector Dissipation ($T_c=25$)	10W
P_C —Collector Dissipation ($T_A=25$)	1W
V_{CBO} —Collector-Base Voltage.....	-40V
V_{CEO} —Collector-Emitter Voltage.....	-30V
V_{EBO} —Emitter-Base Voltage.....	-5V
I_C —Collector Current (DC)	-3A
I_b —Base Current (DC)	-0.6A

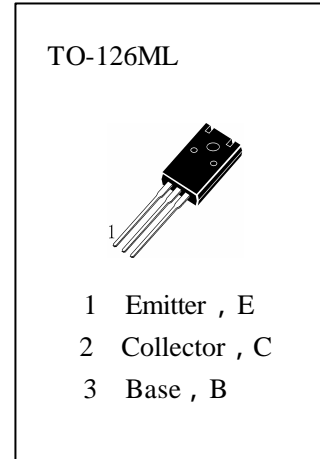

ELECTRICAL CHARACTERISTICS ($T_a=25$)

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
I_{CBO}	Collector-Base Cutoff Current			-1	μA	$V_{CB}=-30V, I_E=0$
I_{EBO}	Emitter- Base Cutoff Current			-1	μA	$V_{EB}=-5V, I_C=0$
h_{FE}	DC Current Gain	60		400		$V_{CE}=-2V, I_C=-1A$
$V_{CE(sat)}$	Collector- Emitter Saturation Voltage		-0.3	-0.5	V	$I_C=-2A, I_B=-0.2A$
$V_{BE(sat)}$	Base -Emitter Saturation Voltage		-1.0	-2.0	V	$I_C=-2A, I_B=-0.2A$
C_{ob}	Output Capacitance		55		pF	$V_{CB}=-10V, I_E=0, f=1MHz$
f_T	Current Gain-Bandwidth Product		80		MHz	$V_{CE}=-5V, I_E=-0.1A$

h_{FE} Classification

R	O	Y	G
60—120	100—200	160—320	200—400

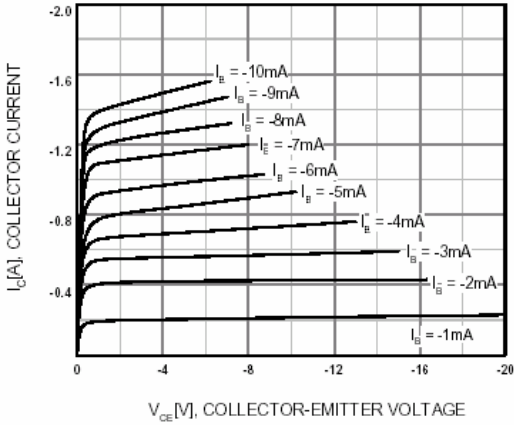


Figure 1. Static Characteristic

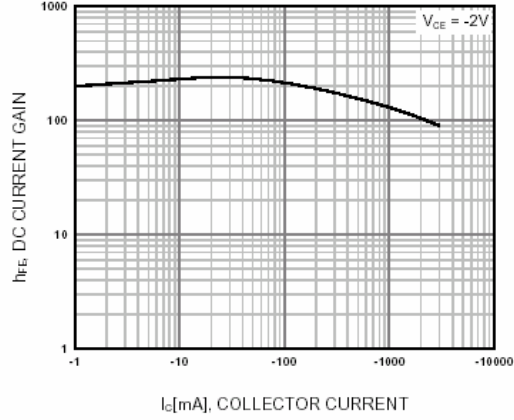


Figure 2. DC current Gain

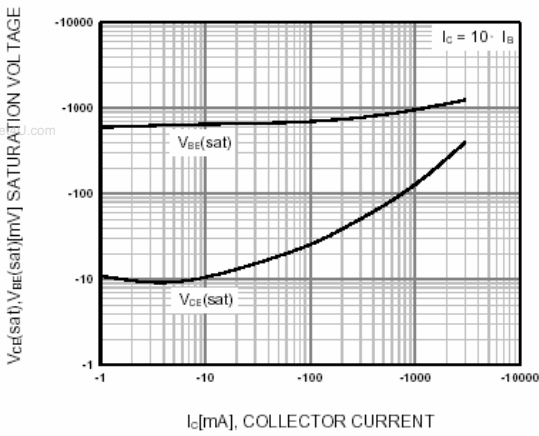


Figure 3. Base-Emitter Saturation Voltage Collector-Emitter Saturation Voltage

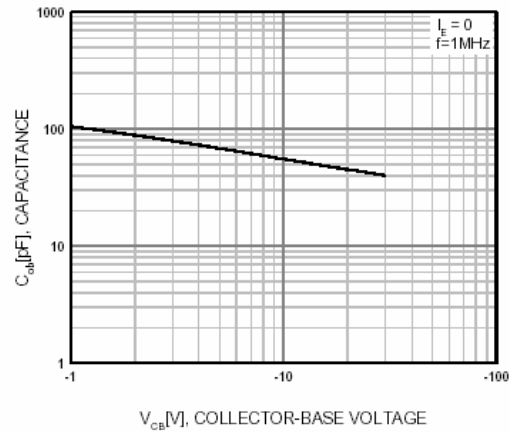


Figure 4. Collector Output Capacitance

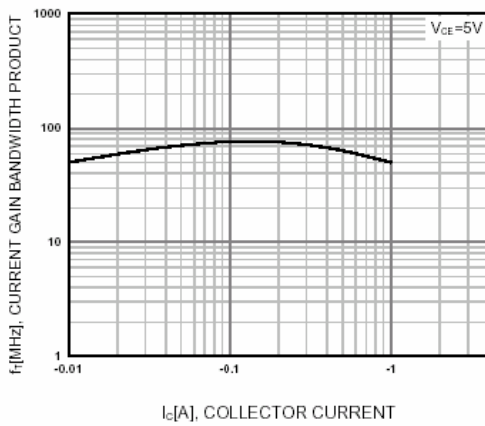


Figure 5. Current Gain Bandwidth Product

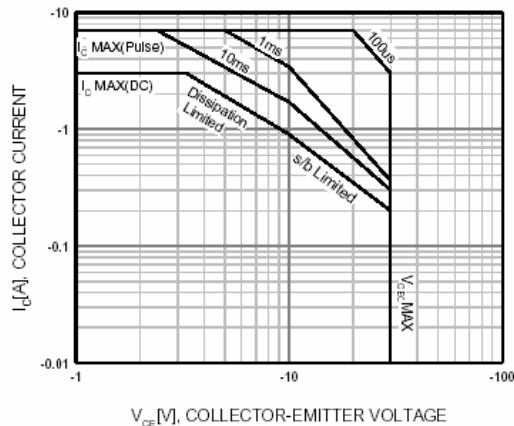


Figure 6. Safe Operating Area



HS772

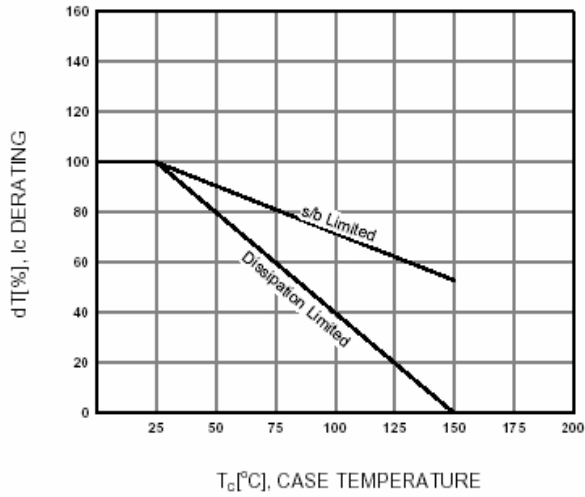


Figure 7. Derating Curve of Safe Operating Areas

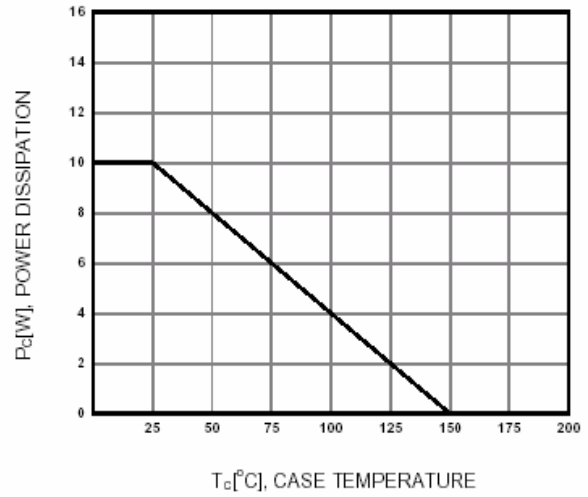


Figure 8. Power Derating