

SANYO	No.2129B	3SK180
		N-Channel Silicon MOS FET (Dual Gate) High-Frequency General-Purpose Amp Applications

Applications

- FM tuners and VHF tuners.

Features

- High power gain and low noise figure.
- High forward transfer admittance.

Absolute Maximum Ratings at Ta = 25°C

			unit
Drain-to-Source Voltage	V _{DS}	15	V
Gate1-to-Source Voltage	V _{G1S}	±7	V
Gate2-to-Source Voltage	V _{G2S}	±7	V
Drain Current	I _D	30	mA
Allowable Power Dissipation	P _D	200	mW
Channel Temperature	T _{ch}	125	°C
Storage Temperature	T _{stg}	-55 to +125	°C

Electrical Characteristics at Ta = 25°C


			min	typ	max	unit
Drain-to-Source Voltage	V _{DS}	V _{G1S} = -4V, V _{G2S} = 0V, I _{DS} = 100μA	15			V
G1-S Breakdown Voltage	V _{(BR)G1SS}	I _{G1} = 10μA, V _{DS} = 0, V _{G2S} = 0V	±7			V
G2-S Breakdown Voltage	V _{(BR)G2SS}	I _{G2} = 10μA, V _{DS} = 0, V _{G1S} = 0V	±7			V
Gate1-to-Source Cutoff Voltage	V _{G1S(off)}	V _{DS} = 10V, V _{G2S} = 4V, I _D = 100μA			-3	V
Gate2-to-Source Cutoff Voltage	V _{G2S(off)}	V _{DS} = 10V, V _{G1S} = 0V, I _D = 100μA			-2.5	V
Gate1 Cutoff Current	I _{G1SS}	V _{G1S} = ±5V, V _{G2S} = V _{DS} = 0V			±50	nA
Gate2 Cutoff Current	I _{G2SS}	V _{G2S} = ±5V, V _{G1S} = V _{DS} = 0V			±50	nA
Drain Current	I _{DSS}	V _{DS} = 10V, V _{G1S} = 0, V _{G2S} = 4V	2.5※		24※	mA
Forward Transfer Admittance	Y _{fs}	f = 1kHz, I _D = 10mA, V _{DS} = 10V, V _{G2S} = 4V		20		mS
Input Capacitance	C _{iss}	V _{DS} = 10V, f = 1MHz		3.0		pF
Reverse Transfer Capacitance	C _{rss}	V _{G1S} = 0V, V _{G2S} = 4V		0.02	0.05	pF
Power Gain	PG	V _{DS} = 10V, I _D = 10mA	22	28		dB
Noise Figure	NF	f = 100MHz, V _{G2S} = 4V		1.8	3.0	dB

※ : The 3SK180 is classified by I_{DSS} as follows : (unit : mA)

2.5	4	6.0	5.0	5	12.0	10.0	6	24.0
-----	---	-----	-----	---	------	------	---	------









Marking : DJ
I_{DSS} rank : 4, 5, 6









Package Dimensions 2046A
(unit : mm)



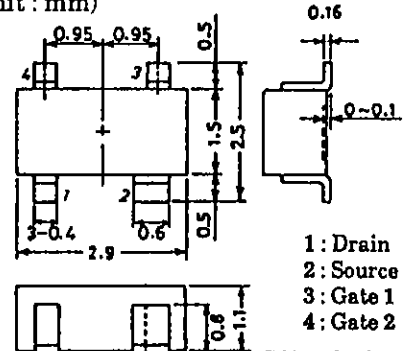


- 1: Drain
- 2: Source
- 3: Gate 1
- 4: Gate 2


SANYO : CP4

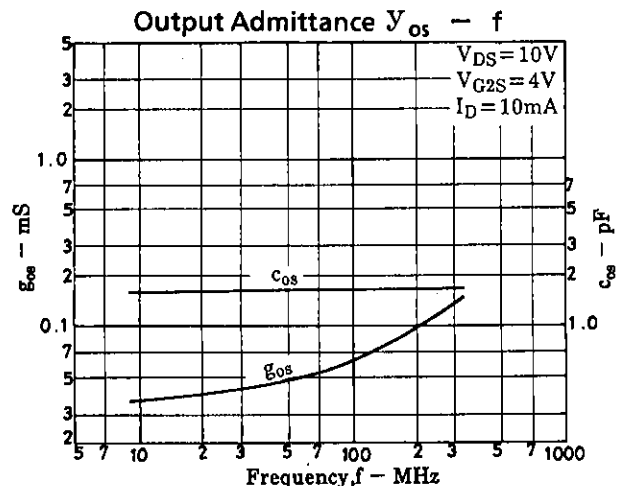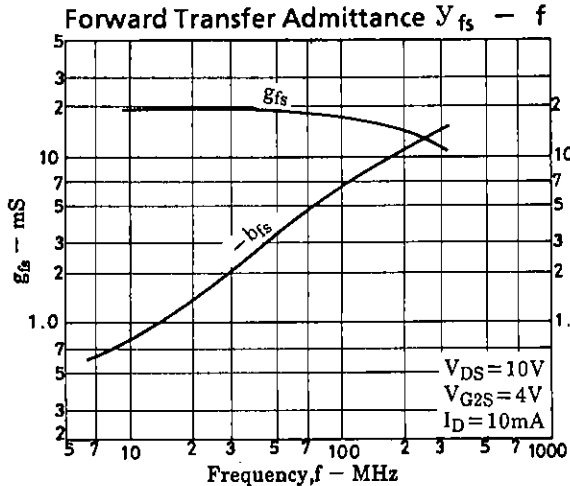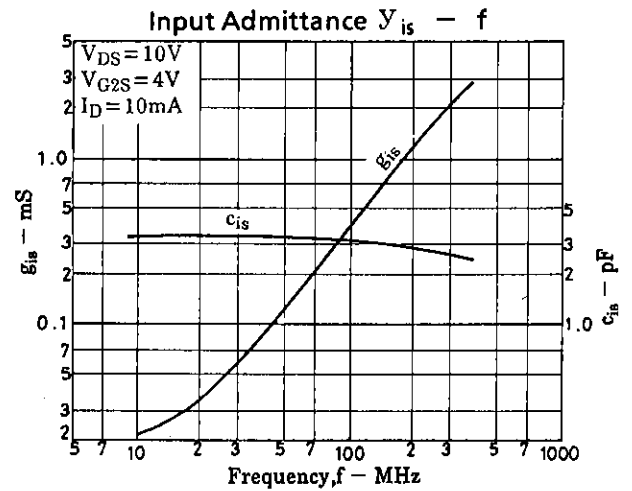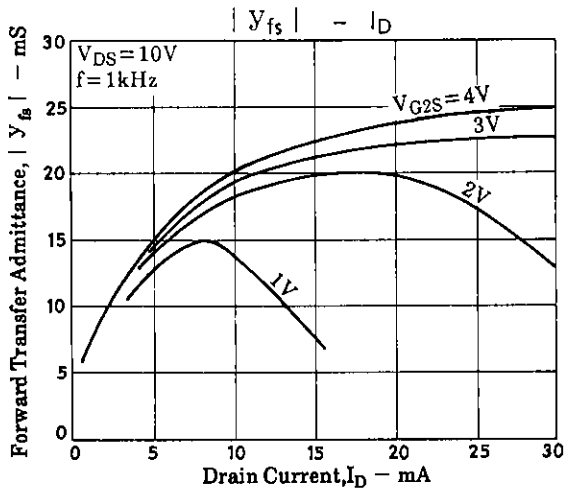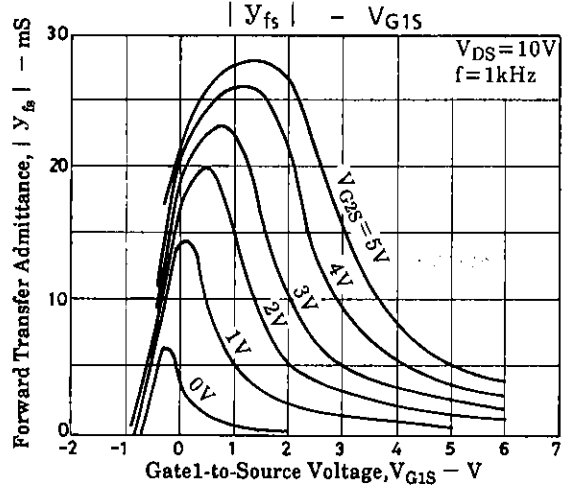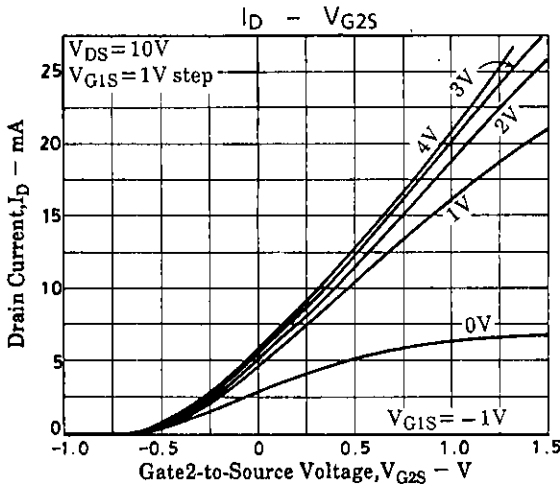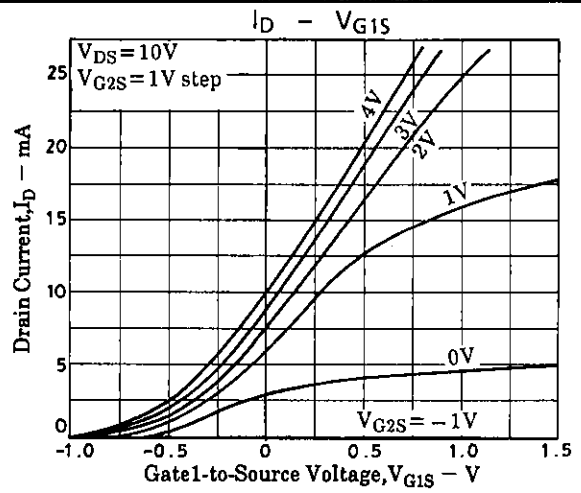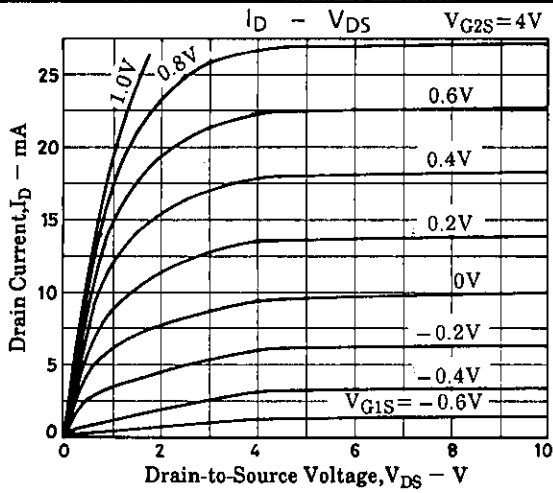

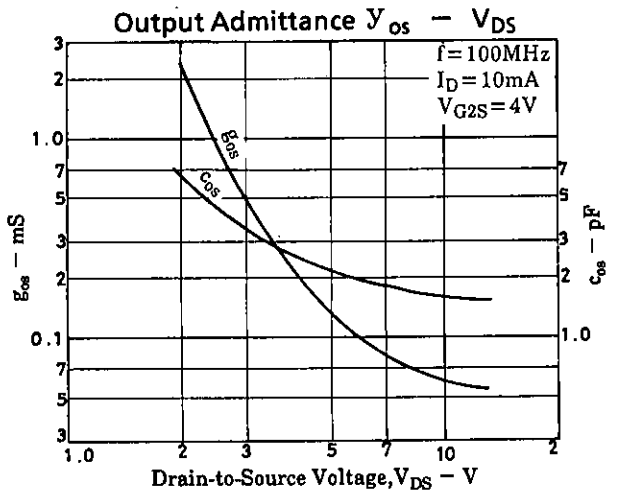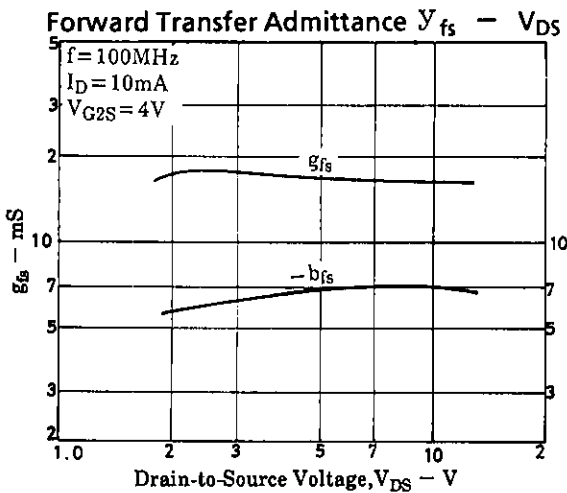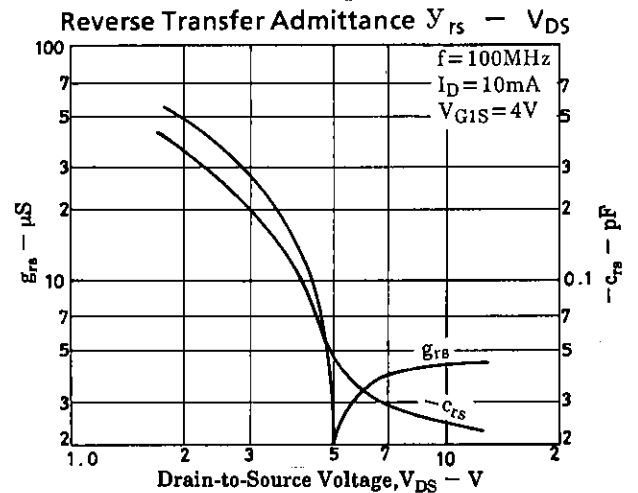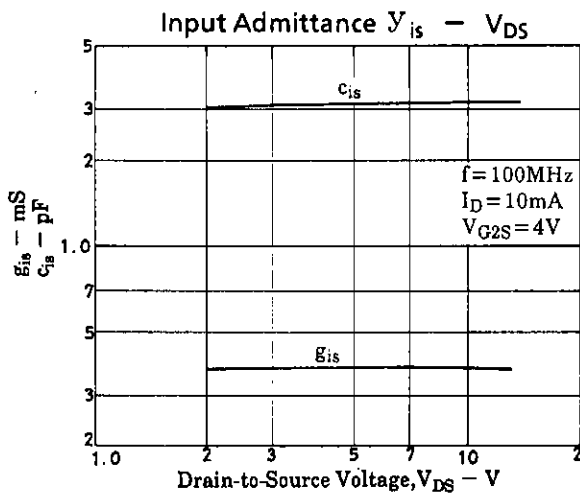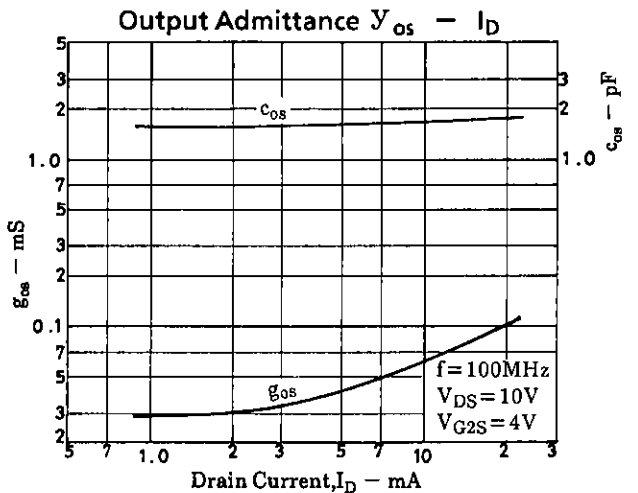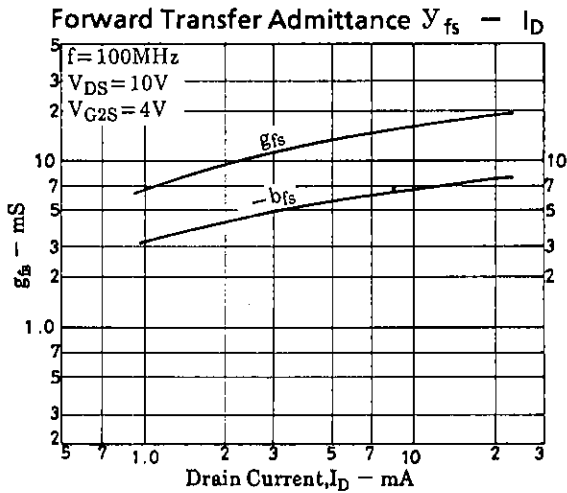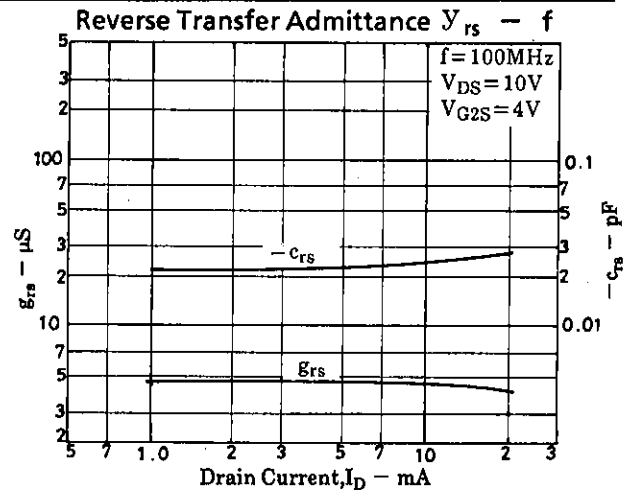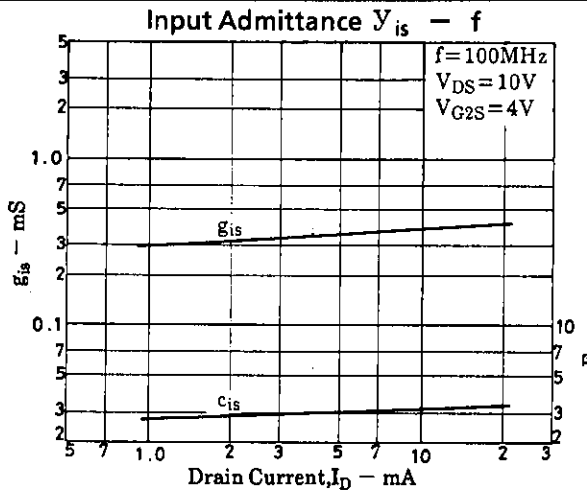

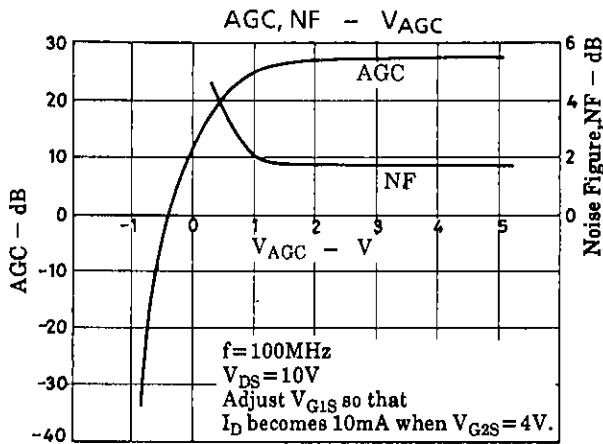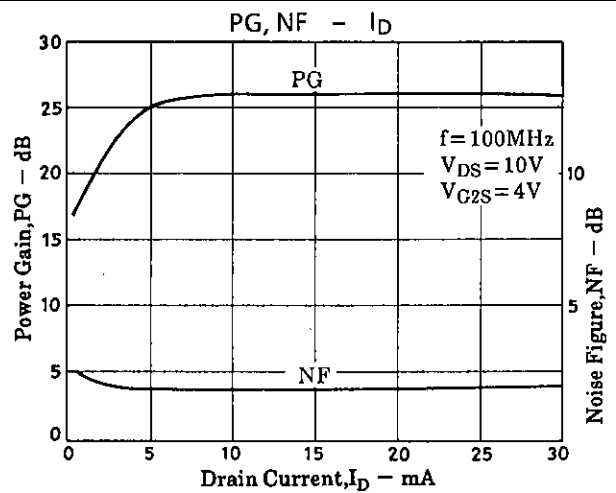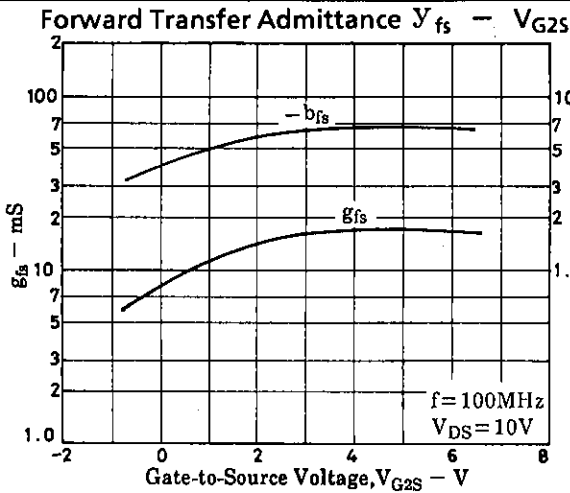

PG, NF Test Circuit

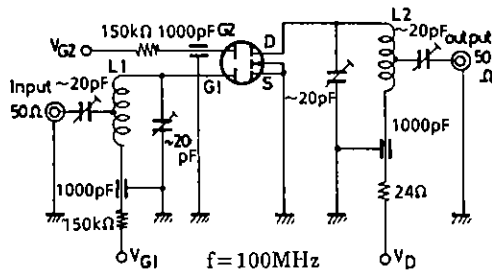

L1: 1mmϕ plated wire 10mmϕ 4T, tap: 1T from gate side
 L2: 1mmϕ plated wire 10mmϕ 6T, tap: 1T from drain side

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
 ■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
 ■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of September, 1995. Specifications and information herein are subject to change without notice.