



# SAW Components

Data Sheet B7752





SAW Components

B7752

Low-Loss Filter for Mobile Communication

2140,0 MHz

Data Sheet




Chip Sized SAW Package DCS6K

Features

- Low-loss RF filter for mobile telephone W-CDMA system, receive path
- Low amplitude ripple
- Usable passband 60 MHz
- Unbalanced to balanced operation
- Impedance transformation from 50Ω to 200Ω
- Package for Surface Mounted Technology (SMT)
- Chip Sized SAW Package (CSSP)

Terminals


- Gold-plated Ni

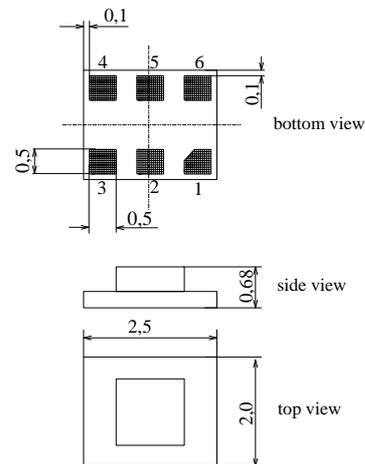

Dimensions in mm, approx. weight 0,012 g

Pin configuration

- 2 Input, unbalanced
- 4, 6 Output, balanced
- 1, 3, 5 To be grounded

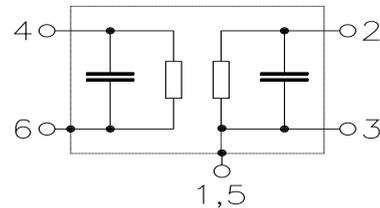

Type	Ordering code	Marking and Package according to	Packing according to
B7752	B39212-B7752-C910	C61157-A7-A97	F61074-V8153-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operating temperature range	$T$	- 20/+ 85	°C	
Storage temperature range	$T_{stg}$	- 40/+ 85	°C	
DC voltage	$V_{DC}$	5	V	
ESD voltage	$V_{ESD}$	50	V	
Source power	$P_S$	10	dBm	



**SAW Components**

**B7752**

**Low-Loss Filter for Mobile Communication**

**2140,0 MHz**

**Data Sheet**



**Characteristics**

Operating temperature range:  $T = +25^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 200\ \Omega$  (balanced) || 12 nH

		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Center frequency</b>	$f_C$	—	2140,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	—	2,4	2,8	dB
2110,0 ... 2170,0 MHz					
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	0,8	1,2	dB
2110,0 ... 2170,0 MHz					
<b>Amplitude ripple per 5MHz channel (p-p)</b>	$\Delta\alpha_{5\text{MHz}}$	—	0,3	0,5	dB
2110,0 ... 2170,0 MHz					
<b>Input VSWR</b>		—	1,9	2,2	
2110,0 ... 2170,0 MHz					
<b>Output VSWR</b>		—	1,9	2,2	
2110,0 ... 2170,0 MHz					
<b>Output amplitude balance (<math> S_{31}/S_{21} </math>)</b>		-1,0	0	1,0	dB
2110,0 ... 2170,0 MHz					
<b>Output phase balance (<math>\phi(S_{31})-\phi(S_{21})+180^{\circ}</math>)</b>		-10,0	0	10,0	degree
2110,0 ... 2170,0 MHz					
<b>Attenuation</b>	$\alpha$				
180,0 ... 200,0 MHz		60	80	—	dB
200,0 ... 1000,0 MHz		50	58	—	dB
1000,0 ... 1880,0 MHz		35	40	—	dB
1880,0 ... 1980,0 MHz		30	36	—	dB
1980,0 ... 2050,0 MHz		24	28	—	dB
2205,0 ... 2255,0 MHz		15	22	—	dB
2255,0 ... 2300,0 MHz		20	27	—	dB
2300,0 ... 2490,0 MHz		27	34	—	dB
2490,0 ... 2550,0 MHz		35	40	—	dB
2550,0 ... 3200,0 MHz		35	39	—	dB
3200,0 ... 6000,0 MHz		40	54	—	dB



**SAW Components**

**B7752**

**Low-Loss Filter for Mobile Communication**

**2140,0 MHz**

**Data Sheet**




**Characteristics**

Operating temperature range:  $T = -20$  to  $+85$  °C  
 Terminating source impedance:  $Z_S = 50$  Ω  
 Terminating load impedance:  $Z_L = 200$  Ω (balanced) || 12 nH


		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Center frequency</b>	$f_C$	—	2140,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{max}$	—	2,8	3,2	dB
2110,0 ... 2170,0 MHz					
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	1,2	1,5	dB
2110,0 ... 2170,0 MHz					
<b>Amplitude ripple per 5MHz channel (p-p)</b>	$\Delta\alpha_{5MHz}$	—	0,3	0,5	dB
2110,0 ... 2170,0 MHz					
<b>Input VSWR</b>		—	2,0	2,2	
2110,0 ... 2170,0 MHz					
<b>Output VSWR</b>		—	2,0	2,2	
2110,0 ... 2170,0 MHz					
<b>Output amplitude balance (<math> S_{31}/S_{21} </math>)</b>		-1,0	0	1,5	dB
2110,0 ... 2170,0 MHz					
<b>Output phase balance (<math>\phi(S_{31})-\phi(S_{21})+180^\circ</math>)</b>		-10,0	0	15,0	degree
2110,0 ... 2170,0 MHz					
<b>Attenuation</b>	$\alpha$				
180,0 ... 200,0 MHz		60	80	—	dB
200,0 ... 1000,0 MHz		50	58	—	dB
1000,0 ... 1880,0 MHz		35	40	—	dB
1880,0 ... 1980,0 MHz		30	36	—	dB
1980,0 ... 2050,0 MHz		24	28	—	dB
2205,0 ... 2255,0 MHz		15	21	—	dB
2255,0 ... 2300,0 MHz		20	27	—	dB
2300,0 ... 2490,0 MHz		27	34	—	dB
2490,0 ... 2550,0 MHz		35	40	—	dB
2550,0 ... 3200,0 MHz		35	39	—	dB
3200,0 ... 6000,0 MHz		40	54	—	dB



Transfer function:

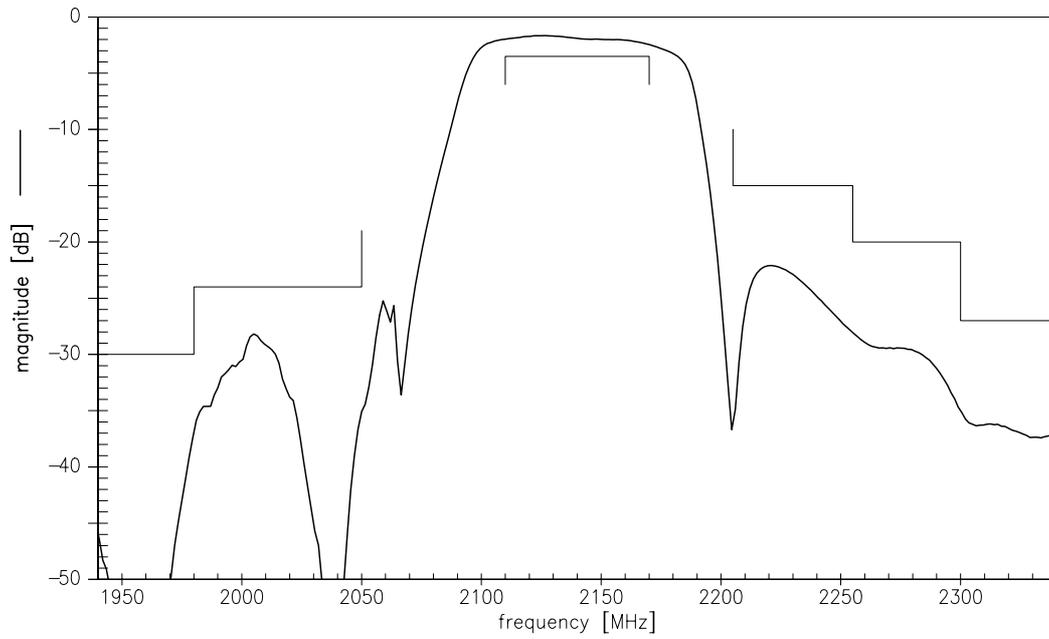


Transfer function (wide band) :

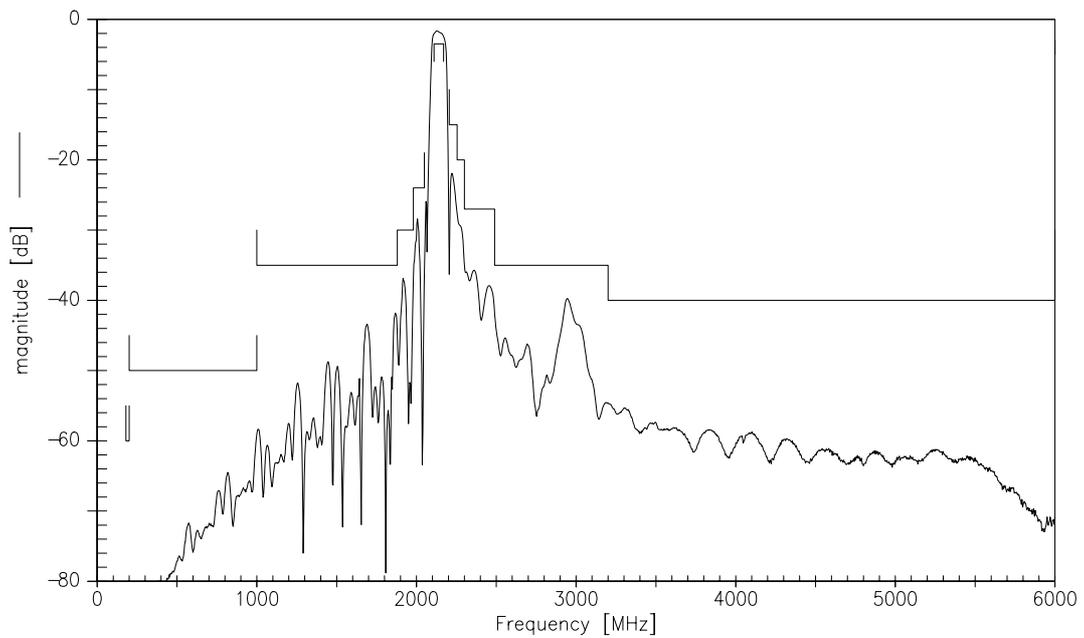




Output amplitude balance( $|S_{31}/S_{21}|$ ):

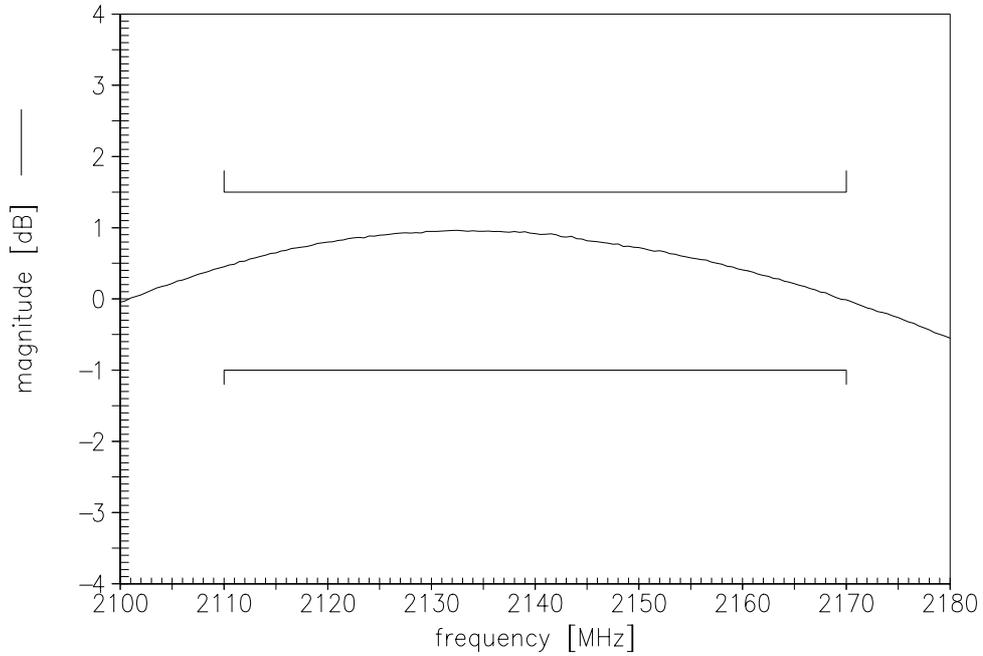

Output phase balance( $\phi(S_{31})-\phi(S_{21})+180^\circ$ ):

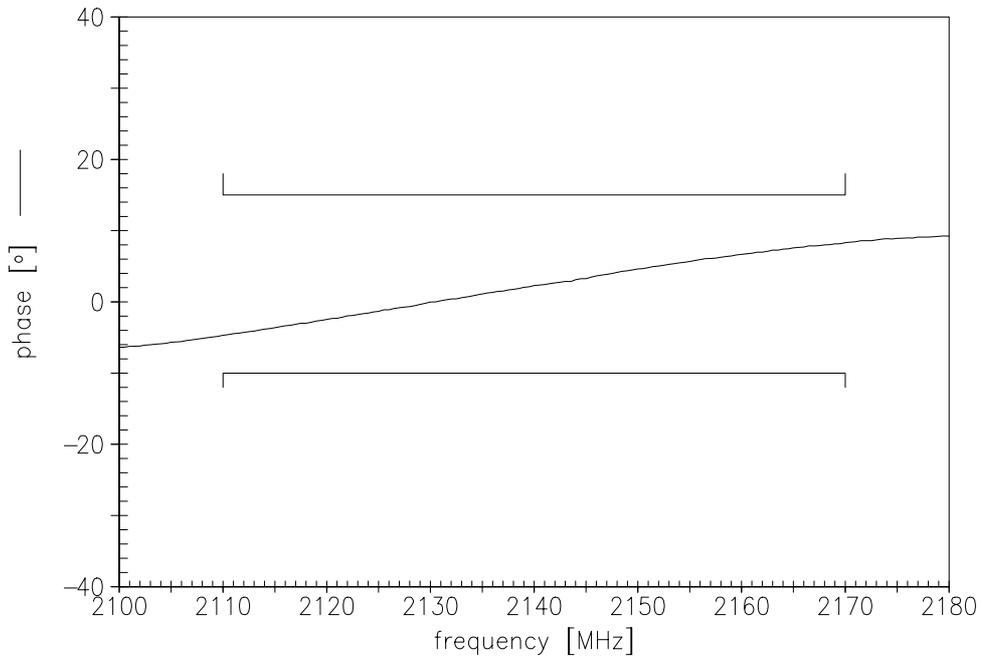



**SAW Components**

**B7752**

**Low-Loss Filter for Mobile Communication**

**2140,0 MHz**

Data Sheet



**Published by EPCOS AG**  
**Surface Acoustic Wave Components Division, SAW MC WT**  
**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.