



# SAW Components

Data Sheet B7764






Chip Sized SAW Package DCS6P

Features

- Low-loss RF filter for mobile telephone EGSM system, transmit path
- Low amplitude ripple
- Usable passband 35 MHz
- Balanced to unbalanced operation
- Impedance transformation from 100 Ω to 50 Ω
- Suitable for GPRS class 1 to 12
- Package for **Surface Mounted Technology (SMT)**

Terminals


- Ni, gold-plated

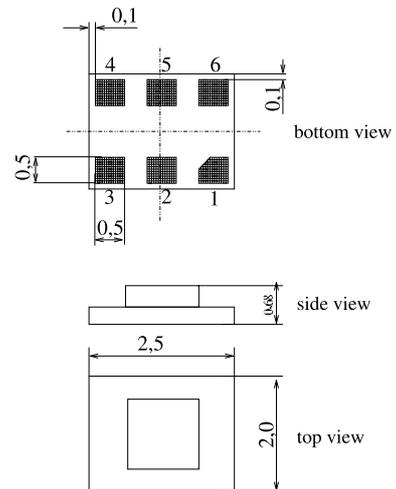

Dimensions in mm, approx. weight 0,010 g

Pin configuration

- 4 Balanced input
- 6 Balanced input
- 2 Output
- 1,3, 5 Ground, to be grounded

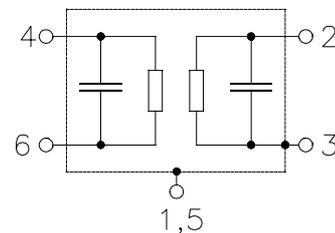

Type	Ordering code	Marking and Package according to	Packing according to
B7764	B39901-B7764-E410	C61157-A7-A101	F61074-V8153-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	$T$	- 30 / + 85	°C	
Storage temperature range	$T_{stg}$	- 40 / +85	°C	
DC voltage	$V_{DC}$	5	V	
ESD voltage	$V_{MM}$	100	V	machine model
		250	V	human body model
Input power at				
GSM850, GSM900 Tx bands	$P_{in}$	15	dBm	peak power of GSM signal, duty cycle 4:8
GSM1800, GSM1900 Tx bands		15		



**Characteristics**


Operating temperature range:  $T = -10 \dots +75 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 100 \text{ } \Omega \parallel 33 \text{ nH (balanced)}$   
 Terminating load impedance:  $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
<b>Nominal frequency</b>	$f_N$	—	897,5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	—	2,9	3,4*	dB
880,0 ... 915,0	MHz				
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	1,3	1,9	dB
880,0 ... 915,0	MHz				
<b>Output phase balance</b> ( $\phi(S_{31}) - \phi(S_{21}) + 180^\circ$ )		-10	0	10	°
880,0 ... 915,0	MHz				
<b>Output amplitude balance</b> ( $ S_{31}/S_{21} $ )		-0,8	0,2	1,2	dB
880,0 ... 915,0	MHz				
<b>Input VSWR</b>		—	1,8	2,1	
880,0 ... 915,0	MHz				
<b>Output VSWR</b>		—	2,0	2,2	
880,0 ... 915,0	MHz				
<b>Attenuation</b>	$\alpha$				
0,0 ... 800,0	MHz	45	58	—	dB
800,0 ... 860,0	MHz	40	46	—	
860,0 ... 870,0	MHz	13	23	—	
925,0 ... 935,0	MHz	8	15	—	
935,0 ... 1850,0	MHz	25	35	—	
1850,0 ... 6000,0	MHz	20	25	—	


\* 6,5 dB for  $T = -30$  to  $+85 \text{ }^\circ\text{C}$



**Transfer function**


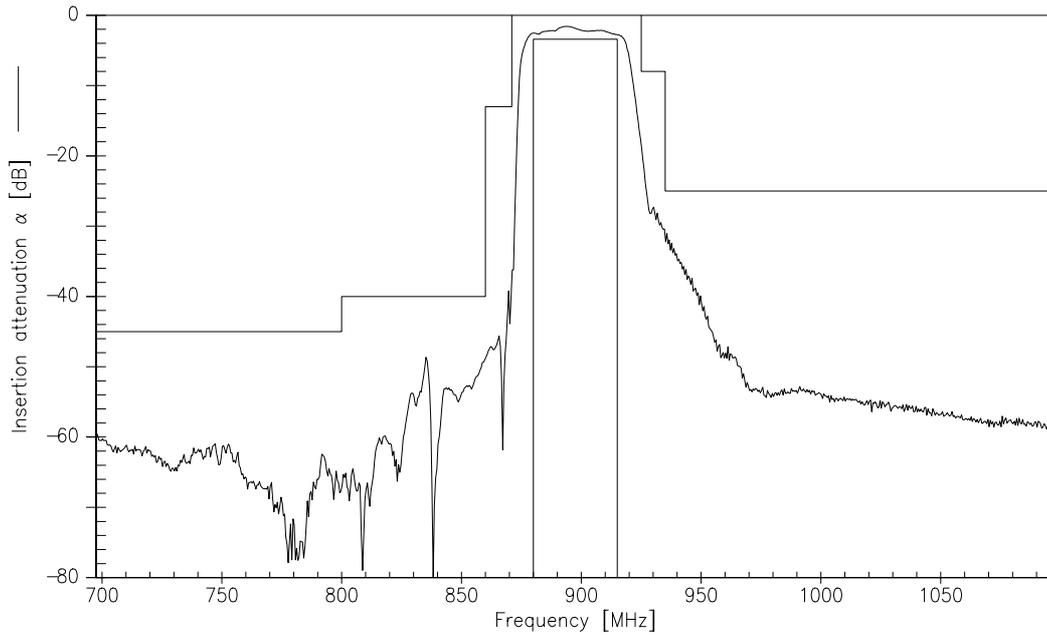


**Transfer function (wideband measurement)**


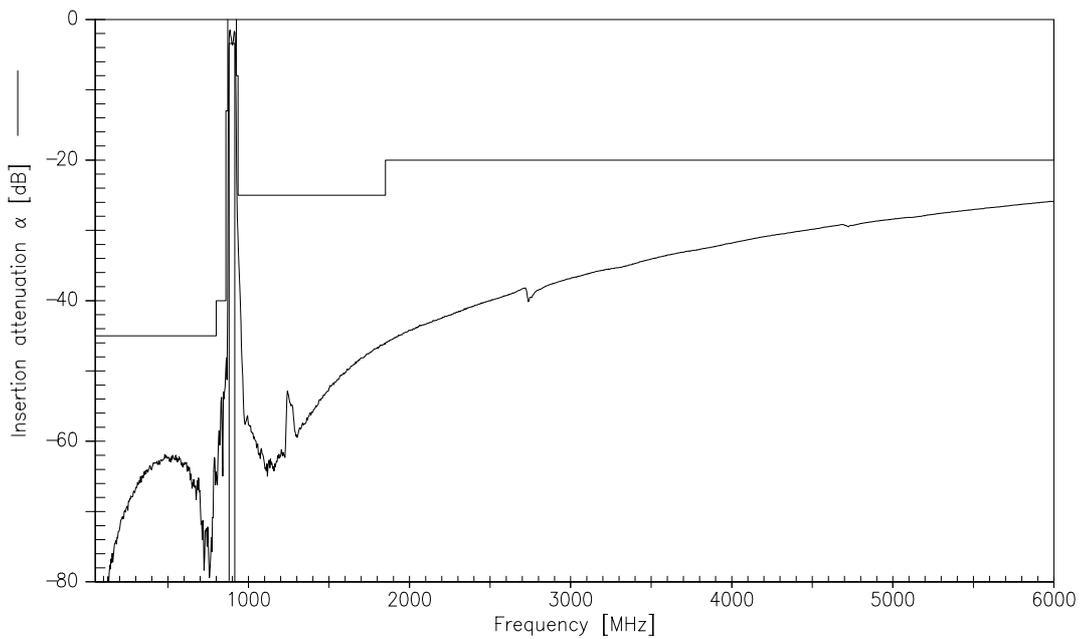




$S_{22}$

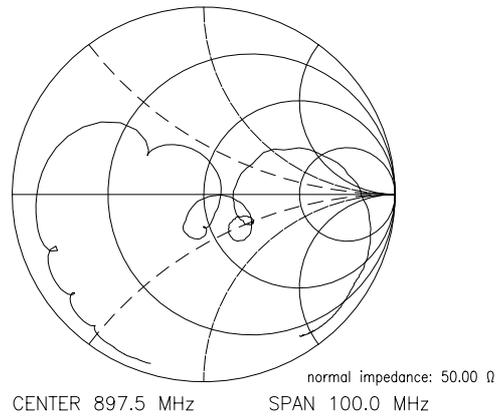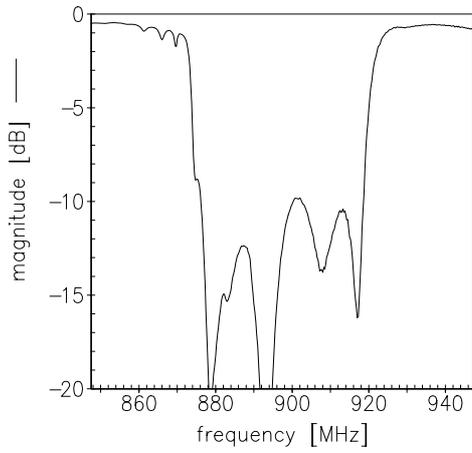

$S_{11}$

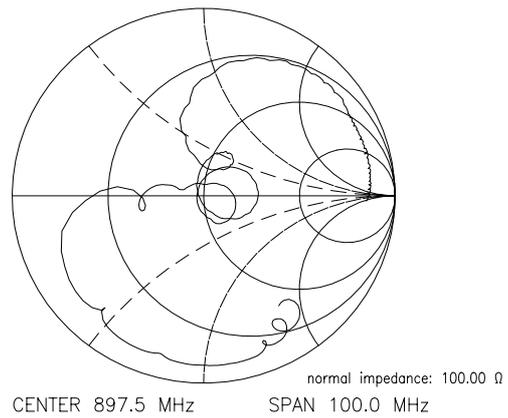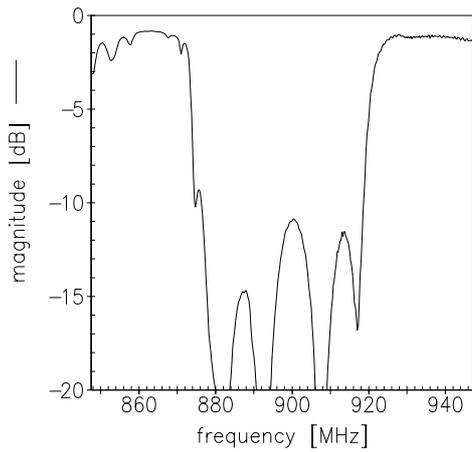



**SAW Components**

**B7764**

**Low-Loss Filter for Mobile Communication**

**897,50 MHz**

Data Sheet



**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW MC WT**

**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2004. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.