

Schottky Rectifier


FEATURES

- Low Forward Voltage Drop
- High Frequency Operation
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

TO-244AB

APPLICATIONS

• These devices are in high current switching power supplies, plating power supplies, UPS systems, converters, free-wheeling diodes, welding, and reverse battery protection.



ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{RRM}	Repetitive Peak Reverse Voltage		150	V
I _{F(AV)}	Average Forward Current		400	А
I _{FSM}	Surge Forward Current	t _p =5µs sine	20000	Α
TJ	Junction Temperature		-55~175	$^{\circ}$ C
T _{stg}	Storage Temperature Range		-55~175	$^{\circ}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER		MAX	UNIT
R _{th j-c}	Thermal Resistance, Junction to Case	Per diode	0.2	°C/W
		Per module	0.1	

ELECTRICAL CHARACTERISTICS

isc website: www.iscsemi.cn

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
VF	Forward Voltage drop	I _F = 200A, T _J = 25℃	1.13	V
		I _F = 400A, T _J = 25℃	1.46	
		I _F = 200A, T _J =125℃	0.75	
		I _F = 400A, T _J =125℃	0.89	
I _R	Instantaneous Reverse Current	V _R =150V, T _J = 25°C	6	μА
		V _R =150V,T _J =125℃	85	mA


1



Schottky Rectifier

PACKAGE OUTLINE

Dimensions in mm (1mm = 0.0394")

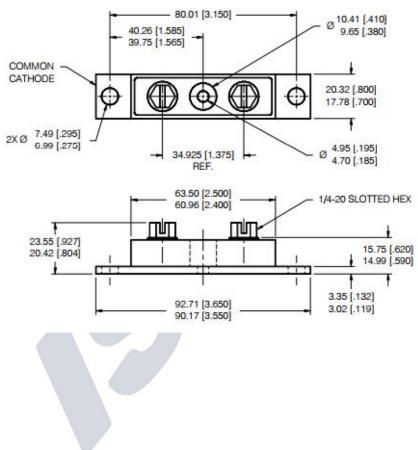

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.