

10BASE MODUES

10BASE-T QUAD PORT SMT TRANSFORMERS




FEATURES

- Designed to meet IR requirements.
- Environmental: At 250°C for 1 minute.

Electrical Specifications @25°C---Operating Temperature 0°C~70°C												
Part No.	Insertion Loss (dB max) 1-10MHz	Attenuation XMIT(dB min) MHz			Return Loss 5-10MHz (dB min)		Crosstalk (dB min) MHz	Common Mode Rejection XMIT(dB min) MHz			Hi-Pot (Vrms min)	
		30	70	100	100Ω	96+13Ω	5-10	5-10	50	100		200
40PT-18041S	-1.0	NA	NA	NA	-20	-15	-50	-50	-35	-25	-20	1500
40PT-18042S	-1.0	NA	NA	NA	-20	-15	-50	-50	-35	-25	-20	1500


Dimension: mm(inch)+/-0.25(0.01)

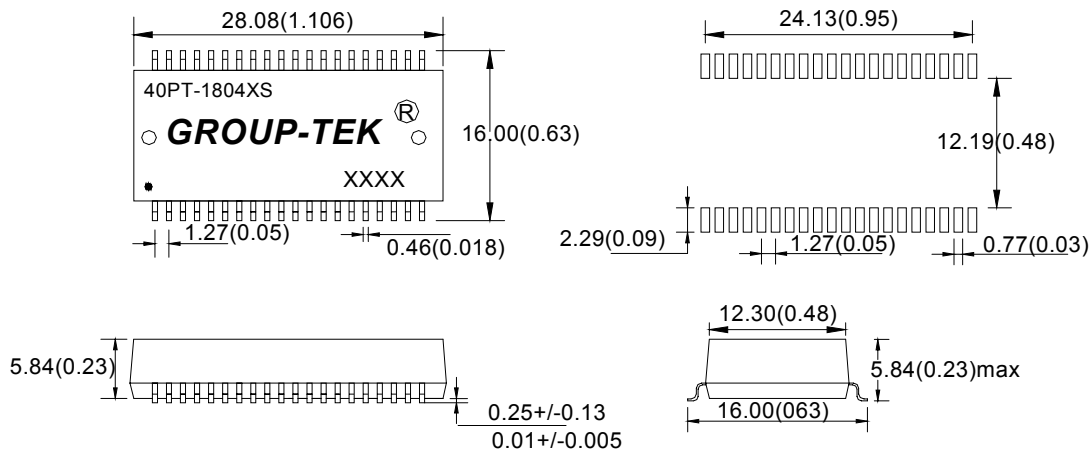

10BASE-T QUAD PORT SMT TRANSFORMERS

Schematic

40PT-18041S

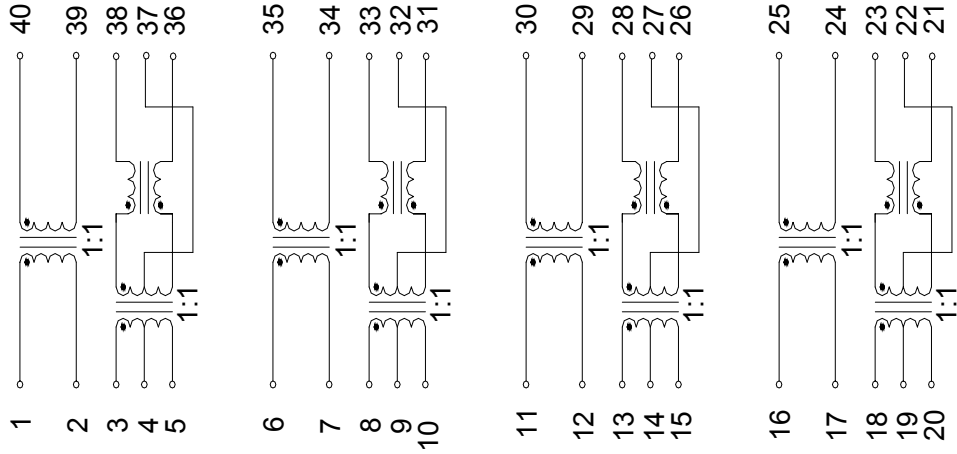

40PT-18042S

