

FLL21E090IY


L,S-band High Power GaAs FET

FEATURES

- High Voltage Operation (VDS=28V) GaAs FET
- High Gain: 15.5dB(typ.) at Pout=43dBm(Avg.)
- Broad Frequency Range : 2110 to 2170MHz
- High Reliability

DESCRIPTION

The FLL21E090IY is a high power GaAs FET that offers high efficiency, ease of matching, greater consistency and broad bandwidth for high power L-band amplifiers. This device is targeted for high voltage, low current operation in digitally modulated base station amplifiers. This product is ideally suited for W-CDMA and Multi-carrier PCS base station amplifiers while offering high gain, long term reliability and ease of use.

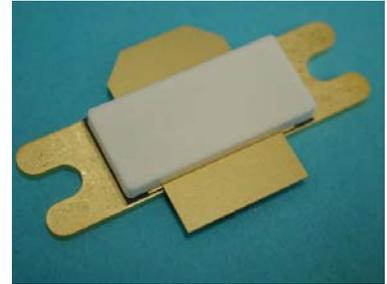

ABSOLUTE MAXIMUM RATING

Item	Symbol	Condition	Rating	Unit
Drain-Source Voltage	V_{DS}	Tc=25°C (Case Temperature)	32	V
Gate-Source Voltage	V_{GS}		-3	V
Total Power Dissipation	P_T		134	W
Storage Temperature	T_{stg}	-	65 to +175	°C
Channel Temperature	T_{ch}	-	200	°C

RECOMMENDED OPERATING CONDITION (Case Temperature Tc=25°C)

Item	Symbol	Condition	Limit	Unit
DC Input Voltage	V_{DS}		<28	V
Forward Gate Current	I_{GF}	$R_G=2\Omega$	<352	mA
Reverse Gate Current	I_{GR}	$R_G=2\Omega$	>-31	mA
Channel Temperature	T_{ch}		155	°C

ELECTRICAL CHARACTERISTICS (Case Temperature Tc=25°C)

Item	Symbol	Condition	Limit			Unit
			Min.	Typ.	Max.	
Pinch-Off Voltage	V_P	$V_{DS}=5V, I_{DS}=151mA$	-0.1	-0.2	-0.5	V
Gate-Source Breakdown Voltage	V_{GSO}	$I_{GS}=-1.51mA$	-5	-	-	V
3rd Order Intermodulation Distortion	IM_3	$V_{DS}=28V$	-	-33	-30	dBc
Power Gain	G_P	$I_{DS}(DC)=750mA$	14.5	15.5	-	dB
Drain Efficiency	η_D	$P_{out}=43dBm(Avg.)$	-	26	-	%
Adjacent Channel Leakage Power Ratio	ACLRL	Note 1	-	-35	-	dBc
Thermal Resistance	R_{th}	Channel to Case	-	1.1	1.3	°C/W

Note 1 : IM_3 , ACLRL and Gain test conditions as follows

IM_3 & Gain : $f_0=2.1325GHz, f_1=2.1475GHz$ W-CDMA(3GPP3.4 12-0) BS-1 64ch non clipping modulation measured over 3.84MHz at $f_0-15MHz$ and $f_1+15MHz$.

ACLRL : $f_0=2.1325GHz$ W-CDMA (3GPP3.4 12-00) BS-1 64ch non clipping modulation, measured over 3.84MHz at $f_0+/-5MHz$

ESD	CLASS III	2000V ~
-----	-----------	---------


Note : Based on EIAJ ED-4701 C-111A(C=100pF, R=1.5kΩ)

CASE STYLE : IY


FLL21E090IY

L,S-band High Power GaAs FET


Output Power vs. Frequency
 $V_{DS}=28V, I_{DS}=750mA$

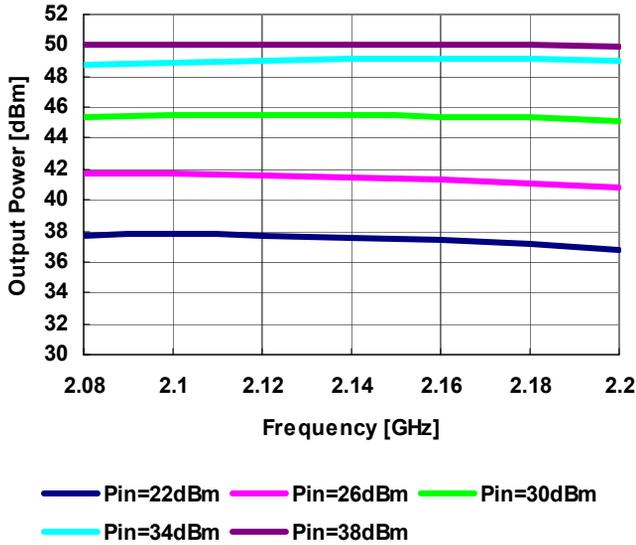


Output Power & Drain Efficiency vs. Input Power
 $V_{DS}=28V, I_{DS}=750mA, f=2.14GHz$

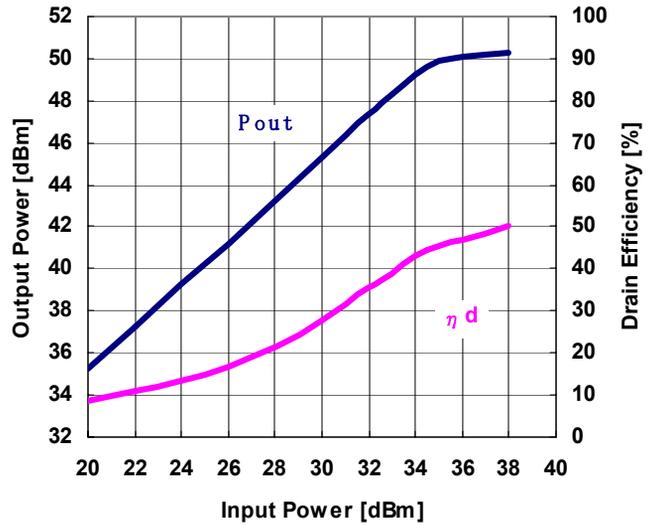

Two-Carrier IMD(ACLR) vs. Output Power
 $V_{DS}=28V, I_{DS}=750mA, f_0=2.1325, f_1=2.1475GHz$
 W-CDMA 3-GPP BS-1 64ch Modulation

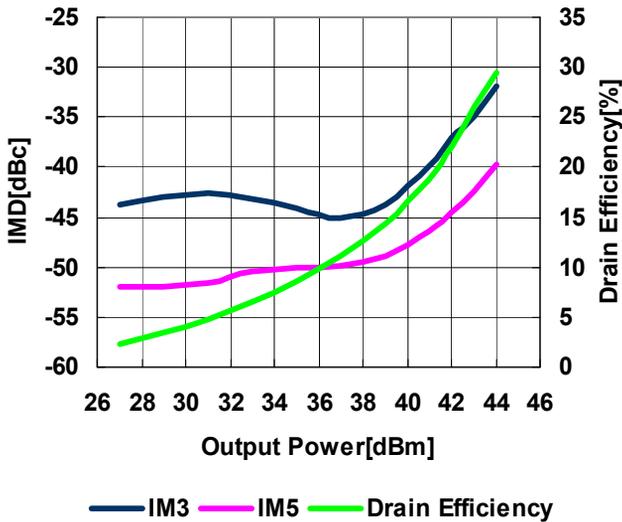


Single-Carrier ACLR vs. Output Power
 $V_{DS}=28V, I_{DS}=750mA, f_0=2.1325GHz$
 W-CDMA 3GPP BS-1 64ch Modulation

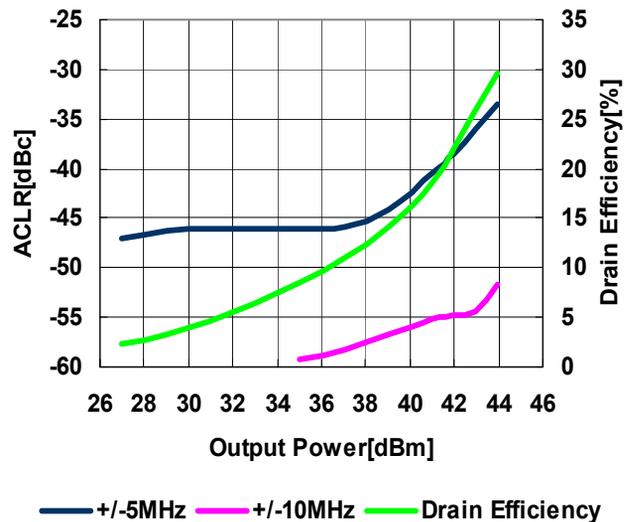

FLL21E090IY

L,S-band High Power GaAs FET


CW IMD vs. Tone Spacing
@VDS=28V, IDS=750mA, fc=2.14GHz
Pout=43dBm

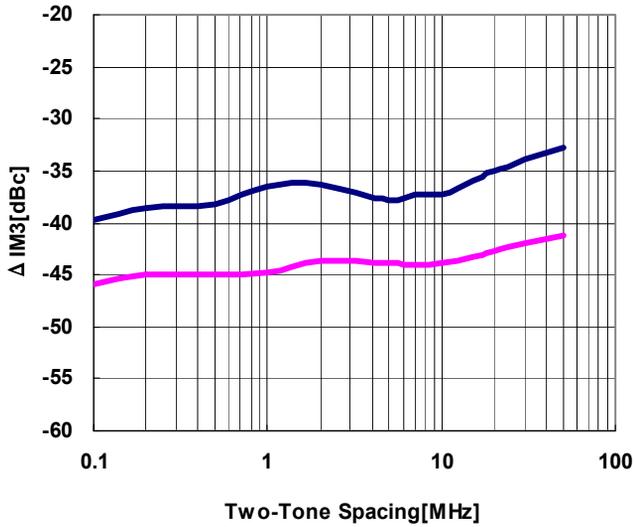

FLL21E090IY


L,S-band High Power GaAs FET

Board Layout

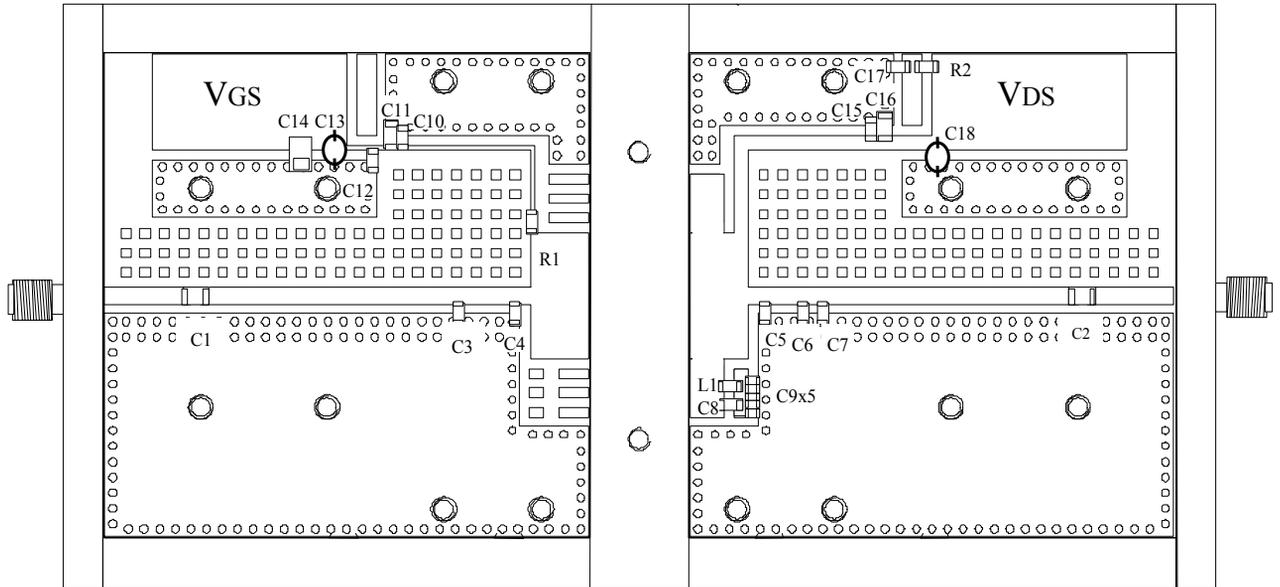

$\epsilon_r=3.5$ $t=0.8\text{mm}$

Circuit Diagram of the Board

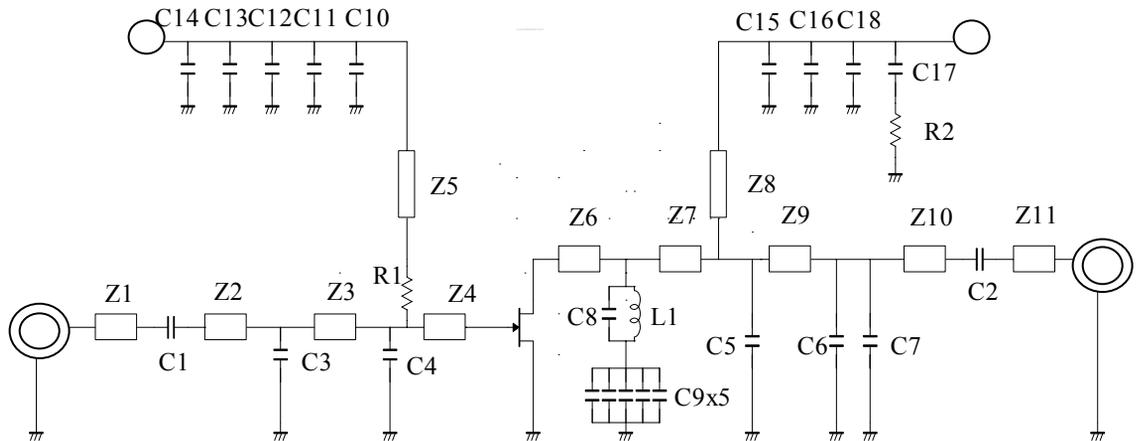

Z1, Z11	9.00mm x 1.78mm	Transmission Line
Z2	26.2mm x 1.78mm	Transmission Line
Z3	6.60mm x 1.78mm	Transmission Line
Z4	6.00mm x 13.0mm	Transmission Line
Z5	23.0mm x 0.50mm	Transmission Line
Z6	3.00mm x 25.0mm	Transmission Line
Z7	3.00mm x 13.0mm	Transmission Line
Z8	23.0mm x 1.50mm	Transmission Line
Z9	10.8mm x 1.78mm	Transmission Line
Z10	22.0mm x 1.78mm	Transmission Line



C1, C2	10pF	C18	22uF
C3	1.0pF	L1	3.3nF
C4	2.0pF	R1	2.0ohm
C5, C6, C7	0.5pF	R2	51ohm
C8	1.5pF		
C9	0.1uF		
C10, C15	20pF		
C11, C16	100nF		
C12, C17	1000pF		
C13, C14	10uF		

Board
input size $\epsilon_r=3.5$ $t=0.8\text{mm}$
50mm x 50mm
output size $\epsilon_r=3.5$ $t=0.8\text{mm}$
50mm x 50mm

FLL21E090IY

L,S-band High Power GaAs FET


■S-Parameters @VDS=28V, IDS=750mA, f=1.0 to 3.0 GHz

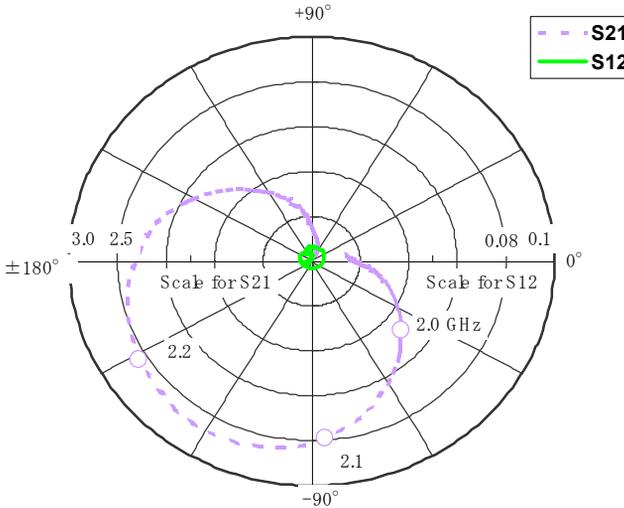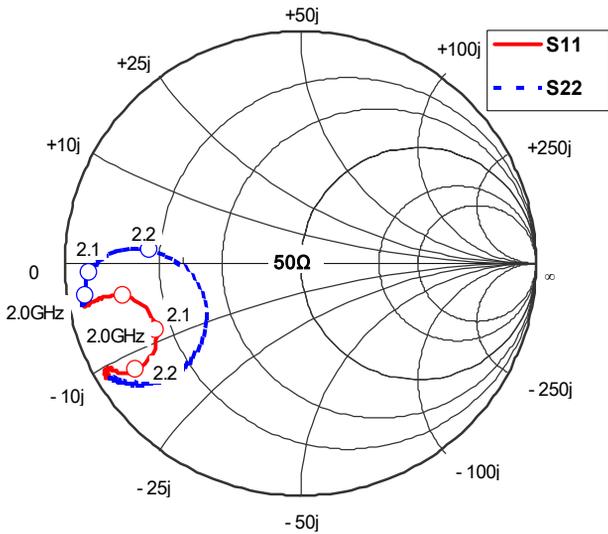


[GHz]	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
1.00	0.9634	-172.52	0.185	21.926	0.0011	91.071	0.9638	-171.69
1.10	0.9567	-171.64	0.1738	22.708	0.0012	105.34	0.9571	-171.44
1.20	0.9592	-170.81	0.1796	23.891	0.0014	106.3	0.9589	-170.97
1.30	0.9583	-170.19	0.1856	22.494	0.0016	119.39	0.9571	-170.73
1.40	0.9524	-169.69	0.2063	23.295	0.0016	112.69	0.9566	-170.11
1.50	0.9571	-168.96	0.2399	20.502	0.0026	122.64	0.9558	-169.73
1.60	0.9465	-168.85	0.3019	19.887	0.0031	127.43	0.9539	-169.55
1.70	0.9396	-168.87	0.4171	9.7863	0.0039	122.24	0.9461	-169.47
1.80	0.918	-169.14	0.5432	-0.3251	0.004	113.26	0.9385	-169.79
1.90	0.8744	-169.91	0.8481	-13.596	0.0056	111.46	0.9276	-170.16
2.00	0.7691	-169.68	1.4267	-39.755	0.0064	73.076	0.9273	-171.5
2.10	0.6787	-155.22	2.3705	-86.126	0.0054	15.023	0.9018	-177.51
2.11	0.6782	-153.28	2.4453	-92.117	0.0049	4.6718	0.8894	-178.55
2.12	0.6957	-151.96	2.5065	-98.556	0.0047	-10.341	0.8739	-179.66
2.13	0.7087	-150.22	2.5554	-104.83	0.0044	-21.605	0.8562	179.2
2.14	0.7284	-148.84	2.5928	-111.25	0.0038	-31.755	0.8371	178.16
2.15	0.749	-147.98	2.6012	-117.67	0.0035	-51.932	0.8094	177.06
2.16	0.7702	-147.49	2.6085	-124.11	0.0032	-66.043	0.7809	176.19
2.17	0.785	-146.95	2.5937	-130.41	0.0034	-81.24	0.7498	175.39
2.18	0.8009	-146.8	2.5666	-136.59	0.0032	-99.392	0.7194	174.76
2.19	0.8271	-146.95	2.5421	-142.62	0.0033	-115.92	0.6822	174.43
2.20	0.84	-146.99	2.5068	-148.63	0.0033	-139.05	0.6444	174.64
2.30	0.9158	-149.95	1.781	154.66	0.0048	129.47	0.4764	-147.42
2.40	0.9361	-151.12	0.9958	115.92	0.0035	97.983	0.7412	-138.53
2.50	0.9386	-151.16	0.5194	93.577	0.0019	94.352	0.8586	-142.64
2.60	0.9455	-150.74	0.3276	82.725	0.0013	88.626	0.9035	-145.25
2.70	0.9501	-150.74	0.1998	72.912	0.001	-156.21	0.9267	-147.06
2.80	0.9493	-149.64	0.1465	77.149	0.0019	-171.48	0.9347	-147.9
2.90	0.9576	-149.8	0.1235	67.632	0.0022	-161.33	0.947	-148.56
3.00	0.9579	-149.24	0.0903	65.358	0.004	-162.61	0.947	-148.91

FLL21E090IY

L,S-band High Power GaAs FET

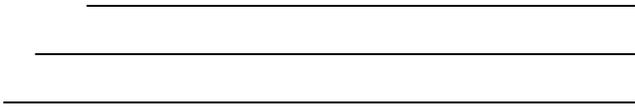

■IY Package Outline

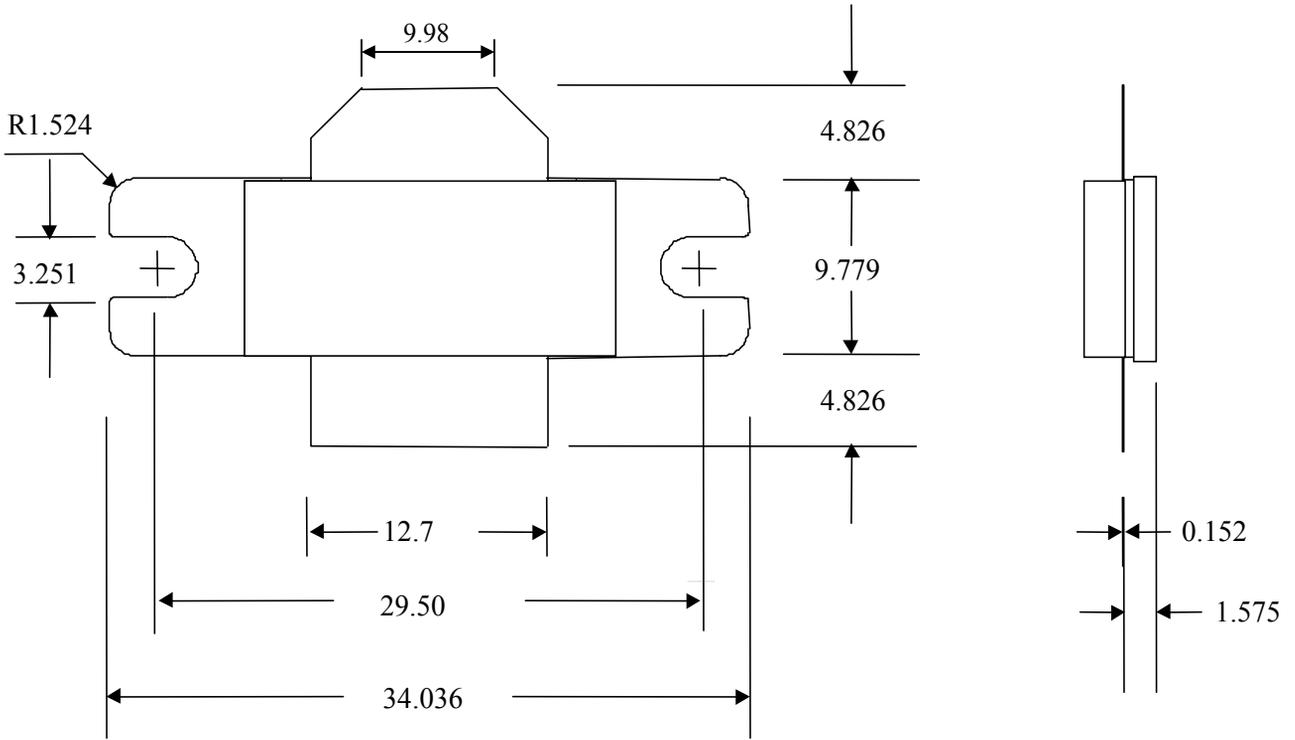

Unit : mm

FLL21E090IY

L,S-band High Power GaAs FET

For further information please contact :

Eudyna Devices USA Inc.

2355 Zanker Rd.
San Jose, CA 95131-1138, U.S.A.
TEL: (408) 232-9500
FAX: (408) 428-9111
www.us.eudyna.com

Eudyna Devices Europe Ltd.

Network House
Norreys Drive
Maidenhead, Berkshire SL6 4FJ
United Kingdom
TEL: +44 (0) 1628 504800
FAX: +44 (0) 1628 504888

Eudyna Devices Asia Pte. Ltd.

Hong Kong Branch
Rm.1101,Ocean Centre, 5 Canton Road
Tsim Sha Tsui, Kowloon, Hong kong
TEL: +852-2377-0227
FAX: +852-2377-3921

Eudyna Devices Inc.

1000 Kamisukiahara, showa-cho
Nakakomagun, Yamanashi
409-3883, Japan
(Kokubo Industrial Park)
TEL +81-55-275-4411
FAX +81-55-275-9461

Sales Division

1, Kanai-cho, Sakae-ku
Yokohama,244-0845,Japan
TEL +81-45-853-8156
FAX +81-45-853-8170

CAUTION

Eudyna Devices Inc. products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not put these products into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Eudyna Devices Inc. reserves the right to change products and specifications without notice. The information does not convey any license under rights of Eudyna Devices Inc. or others.

© 2004 Eudyna Devices USA Inc.
Printed in U.S.A.

