



## FPF1205 / FPF1206 IntelliMAX™ Advanced Load Switch

### Features

- 1.2V to 4.0V Input Voltage Operating Range
- Typical  $R_{ON}$ : 75m $\Omega$  at  $V_{IN}=3.3V$   
110m $\Omega$  at  $V_{IN}=1.8V$   
240m $\Omega$  at  $V_{IN}=1.2V$
- Slew Rate Control with  $t_R$ : 110 $\mu s$
- Output Discharge Function on FPF1206
- Low <1.5 $\mu A$  Quiescent Current
- Extra Low <100nA Off Supply Current
- ESD Protected: Above 7000V HBM, 2000V CDM
- GPIO/CMOS-Compatible Enable Circuitry
- 4-Bump WLCSP, 0.76mm x 0.76mm, 0.4mm Pitch

### Description

The FPF1205/06 is an ultra-small IntelliMAX™ load switch with integrated P-channel switch and analog control features. Internal slew-rate control prevents inrush current and the resulting excessive voltage drop on power rail. The input voltage range operates from 1.2V to 4.0V to provide power-disconnect capability for post-regulated power rails in portable and consumer products. The low shut-off current of 1 $\mu A$  (maximum) allows power designs to meet standby and off-power drain specifications.

The FPF1205/06 is controlled by an active-HIGH logic input (ON pin) compatible with standard CMOS GPIO circuitry found on Field Programmable Gate Array (FPGA) and embedded processors. The FPF1205/06 is available in a 0.76mm x 0.76mm 4-bump Wafer-Level Chip-Scale Package (WLCSP).

### Applications

- Mobile Devices and Smart Phones
- Portable Media Devices
- Ultra-Portable / Mobile Computing
- Advanced Notebook, UMPC, MID
- Portable Medical Devices
- GPS and Navigation Equipment

### Ordering Information

| Part Number | Top Marking | Switch (Typical) at 3.3V <sub>IN</sub> | Output Discharge | ON Pin Activity | $t_R$       | Package                                    |
|-------------|-------------|----------------------------------------|------------------|-----------------|-------------|--------------------------------------------|
| FPF1205UCX  | QK          | 75m $\Omega$                           | NA               | Active HIGH     | 110 $\mu s$ | 4-Ball WLCSP, 0.76mm x 0.76mm, 0.4mm Pitch |
| FPF1206UCX  | QL          | 75m $\Omega$                           | 65 $\Omega$      | Active HIGH     | 110 $\mu s$ |                                            |

## Application Diagram

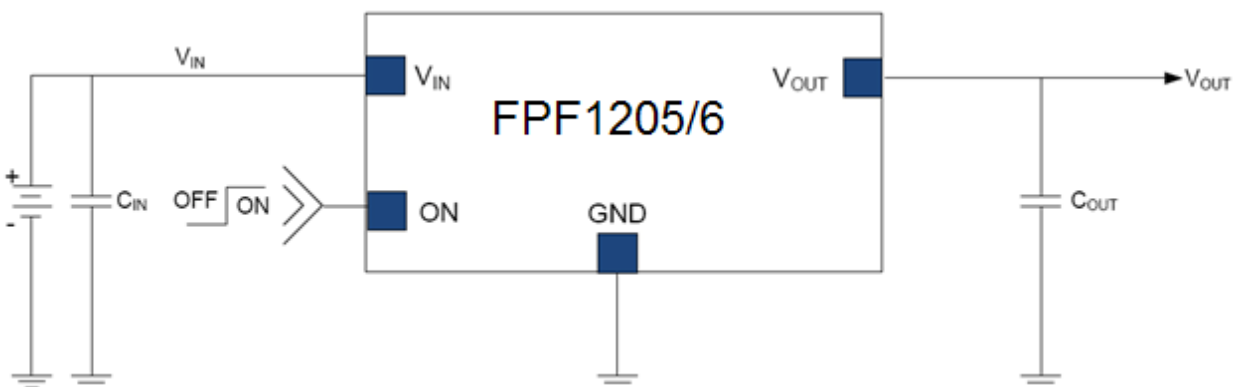


Figure 1. Typical Application

### Notes:

1.  $C_{IN}=1\mu\text{F}$ , X5R, 0603 (for example, Murata GRM185R60J105KE26).
2.  $C_{OUT}=0.1\mu\text{F}$ , X5R, 0805 (for example, Murata GRM216R61A105KA01).

## Functional Block Diagram

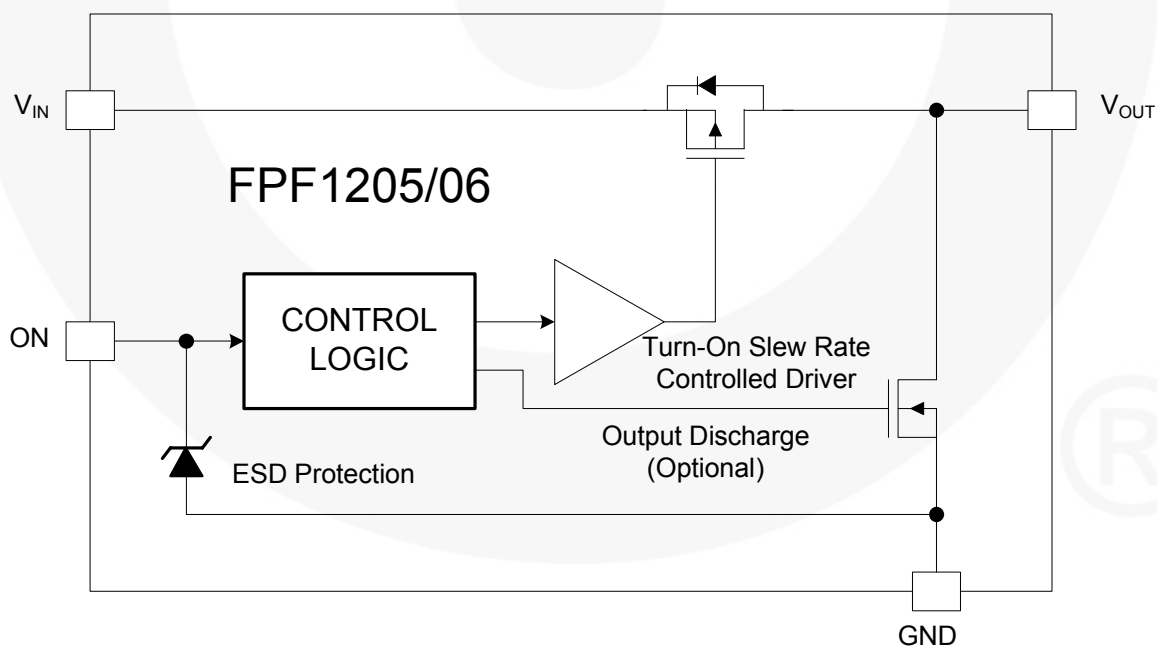


Figure 2. Functional Block Diagram (Output Discharge for FPF1206 Only)

## Pin Configurations




Figure 3. WLCSP Bumps Facing Up (Top View)




Figure 4. WLCSP Bumps Facing Down (Bottom View)

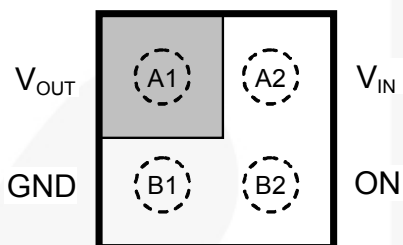


Figure 5. Pin Assignments (Top View)

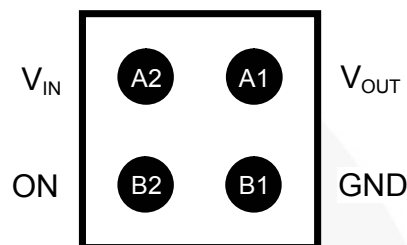


Figure 6. Pin Assignments (Bottom View)

## Pin Definitions

| Pin # | Name             | Description                             |
|-------|------------------|-----------------------------------------|
| A1    | V <sub>OUT</sub> | Switch Output                           |
| A2    | V <sub>IN</sub>  | Supply Input, Input to the power switch |
| B1    | GND              | Ground                                  |
| B2    | ON               | ON/OFF control, active HIGH             |

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol        | Parameter                                           |                                   | Min. | Max. | Unit                 |
|---------------|-----------------------------------------------------|-----------------------------------|------|------|----------------------|
| $V_{IN}$      | $V_{IN}$ , $V_{OUT}$ , $V_{ON}$ to GND              |                                   | -0.3 | 4.2  | V                    |
| $I_{SW}$      | Maximum Continuous Switch Current                   |                                   |      | 1.2  | A                    |
| $P_D$         | Power Dissipation at $T_A=25^{\circ}\text{C}$       |                                   |      | 1.0  | W                    |
| $T_{STG}$     | Storage Junction Temperature                        |                                   | -65  | +150 | $^{\circ}\text{C}$   |
| $T_A$         | Operating Temperature Range                         |                                   | -40  | +85  | $^{\circ}\text{C}$   |
| $\Theta_{JA}$ | Thermal Resistance, Junction-to-Ambient             | 1S2P with One Thermal Via         |      | 110  | $^{\circ}\text{C/W}$ |
|               |                                                     | 1S2P without Thermal Via          |      | 95   |                      |
| ESD           | Electrostatic Discharge Capability <sup>(3,4)</sup> | Human Body Model, JESD22-A114     | 7    |      | kV                   |
|               |                                                     | Charged Device Model, JESD22-C101 | 2    |      |                      |

### Notes:

3. Measured using 2S2P JEDEC std. PCB.
4. Measured using 2S2P JEDEC PCB COLD PLATE Method.

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

| Symbol   | Parameter                     | Min. | Max. | Unit               |
|----------|-------------------------------|------|------|--------------------|
| $V_{IN}$ | Supply Voltage                | 1.2  | 4.0  | V                  |
| $T_A$    | Ambient Operating Temperature | -40  | +85  | $^{\circ}\text{C}$ |

## Electrical Characteristics

Unless otherwise noted,  $V_{IN}=1.2$  to  $4.0V$  and  $T_A=-40$  to  $+85^{\circ}C$ . Typical values are at  $V_{IN}=3.3V$  and  $T_A=25^{\circ}C$ .

| Symbol                                       | Parameter                          | Conditions                                                                                    | Min. | Typ. | Max. | Unit       |
|----------------------------------------------|------------------------------------|-----------------------------------------------------------------------------------------------|------|------|------|------------|
| <b>Basic Operation</b>                       |                                    |                                                                                               |      |      |      |            |
| $V_{IN}$                                     | Supply Voltage                     |                                                                                               | 1.2  |      | 4.0  | V          |
| $I_{Q(OFF)}$                                 | Off Supply Current                 | $V_{ON}=GND$ , $V_{OUT}=Open$ , $V_{IN}=4V$                                                   |      |      | 100  | nA         |
| $I_{SD}$                                     | Shutdown Current                   | $V_{ON}=GND$ , $V_{OUT}=GND$                                                                  |      |      | 1    | $\mu A$    |
| $I_Q$                                        | Quiescent Current                  | $I_{OUT}=0mA$                                                                                 |      |      | 1.5  | $\mu A$    |
| $R_{ON}$                                     | On Resistance                      | $V_{IN}=3.3V$ , $I_{OUT}=200mA$ , $T_A=25^{\circ}C$                                           |      | 75   | 100  | m $\Omega$ |
|                                              |                                    | $V_{IN}=1.8V$ , $I_{OUT}=200mA$ , $T_A=25^{\circ}C$                                           |      | 110  | 150  |            |
|                                              |                                    | $V_{IN}=1.2V$ , $I_{OUT}=200mA$ , $T_A=25^{\circ}C$                                           |      | 240  | 300  |            |
|                                              |                                    | $V_{IN}=1.8V$ , $I_{OUT}=200mA$ , $T_A=85^{\circ}C$                                           |      | 160  | 200  |            |
| $R_{PD}$                                     | Output Discharge $R_{PULL\ DOWN}$  | $V_{IN}=3.3V$ , $V_{ON}=0V$ , $I_{FORCE}=20mA$ , $T_A=25^{\circ}C$ , FPF1206                  |      | 65   | 110  | $\Omega$   |
| $V_{IH}$                                     | On Input Logic HIGH Voltage        | $V_{IN} < 1.5V$                                                                               | 0.9  |      |      | V          |
|                                              |                                    | $V_{IN}=1.5V$ to $4.0V$                                                                       | 1.1  |      |      |            |
| $V_{IL}$                                     | On Input Logic LOW Voltage         | $V_{IN}=1.2V$ to $4.0V$                                                                       |      |      | 0.75 | V          |
| $I_{ON}$                                     | On Input Leakage                   | $V_{ON}=V_{IN}$ or GND                                                                        |      |      | 1    | $\mu A$    |
| <b>Dynamic Characteristics<sup>(5)</sup></b> |                                    |                                                                                               |      |      |      |            |
| $t_{DON}$                                    | Turn-On Delay <sup>(6)</sup>       | $V_{IN}=3.3V$ , $R_L=10\Omega$ , $C_L=0.1\mu F$ , $T_A=25^{\circ}C$                           |      | 110  |      | $\mu s$    |
| $t_R$                                        | $V_{OUT}$ Rise Time <sup>(6)</sup> |                                                                                               |      | 110  |      |            |
| $t_{ON}$                                     | Turn-On Time <sup>(6)</sup>        |                                                                                               |      | 220  |      |            |
| $t_{DOFF}$                                   | Turn-Off Delay <sup>(6)</sup>      | $V_{IN}=3.3V$ , $R_L=10\Omega$ , $C_L=0.1\mu F$ , $T_A=25^{\circ}C$ , FPF1205                 |      | 7    |      | $\mu s$    |
| $t_F$                                        | $V_{OUT}$ Fall Time <sup>(6)</sup> |                                                                                               |      | 2    |      |            |
| $t_{OFF}$                                    | Turn-Off Time <sup>(6)</sup>       |                                                                                               |      | 9    |      |            |
| $t_{DOFF}$                                   | Turn-Off Delay                     | $V_{IN}=3.3V$ , $R_L=500\Omega$ , $C_L=0.1\mu F$ , $T_A=25^{\circ}C$ , FPF1205                |      | 10   |      | $\mu s$    |
| $t_F$                                        | $V_{OUT}$ Fall Time                |                                                                                               |      | 95   |      |            |
| $t_{OFF}$                                    | Turn-Off Time <sup>(6)</sup>       |                                                                                               |      | 105  |      |            |
| $t_{DOFF}$                                   | Turn-Off Delay                     | $V_{IN}=3.3V$ , $R_L=500\Omega$ , $C_L=0.1\mu F$ , $T_A=25^{\circ}C$ , FPF1206 <sup>(7)</sup> |      | 7.0  |      | $\mu s$    |
| $t_F$                                        | $V_{OUT}$ Fall Time                |                                                                                               |      | 10.5 |      |            |
| $t_{OFF}$                                    | Turn-Off Time <sup>(6)</sup>       |                                                                                               |      | 17.5 |      |            |

### Notes:

- These parameters are guaranteed by design and characterization; not production tested.
- $t_{DON}/t_{DOFF}/t_R/t_F$  are defined in Figure 24.
- Output discharge path is enabled during device off.

## Typical Performance Characteristics

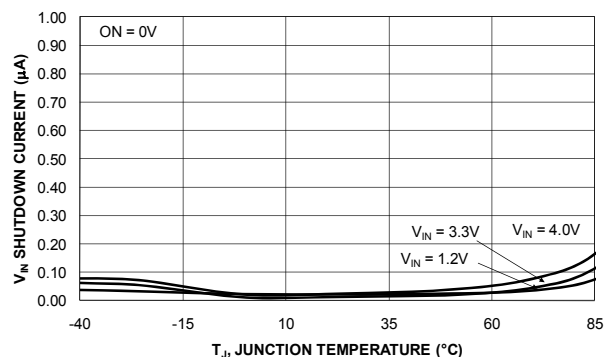


Figure 7. Shutdown Current vs. Temperature

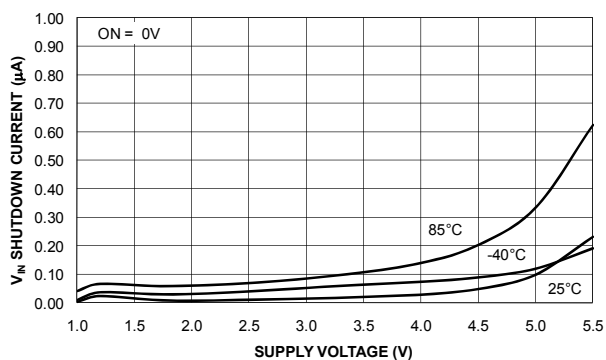


Figure 8. Shutdown Current vs. Supply Voltage

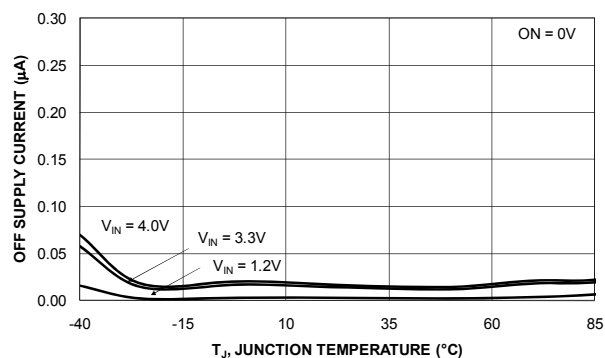


Figure 9. Off Supply Current vs. Temperature (FPF1205,  $V_{OUT}$  Floating)

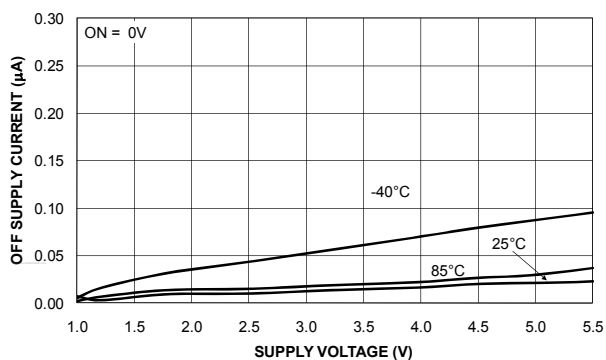


Figure 10. Off Supply Current vs. Supply Voltage (FPF1205,  $V_{OUT}$  Floating)

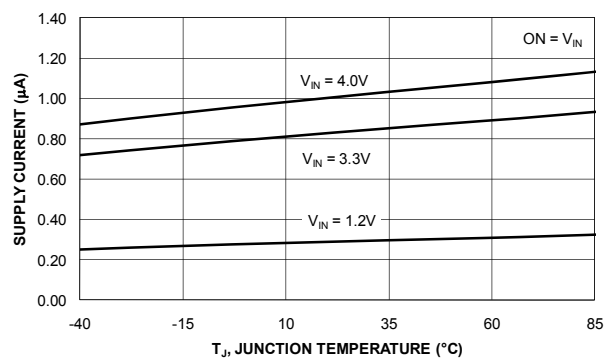


Figure 11. Quiescent Current vs. Temperature

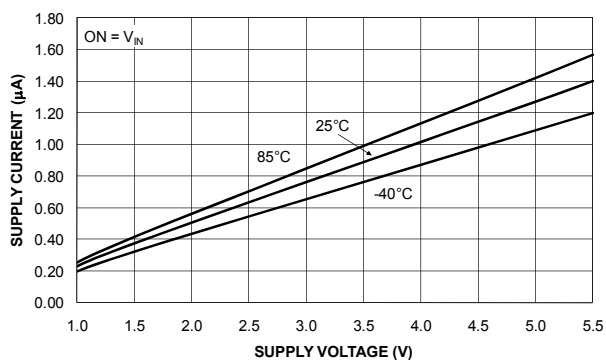


Figure 12. Quiescent Current vs. Supply Voltage

## Typical Performance Characteristics

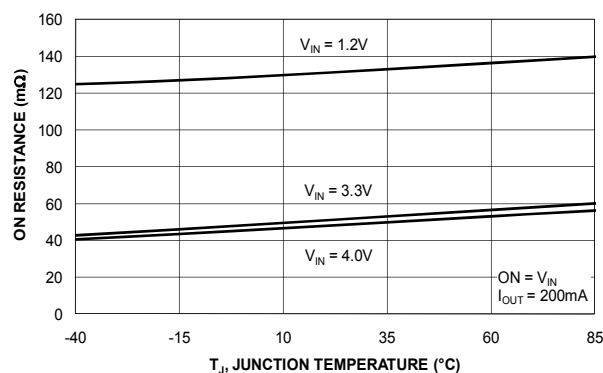


Figure 13.  $R_{ON}$  vs. Temperature

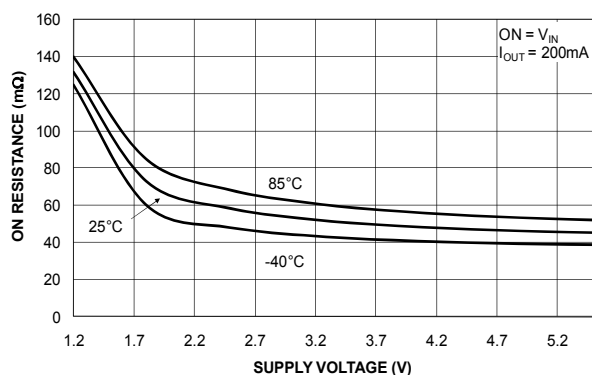


Figure 14.  $R_{ON}$  vs. Supply Voltage

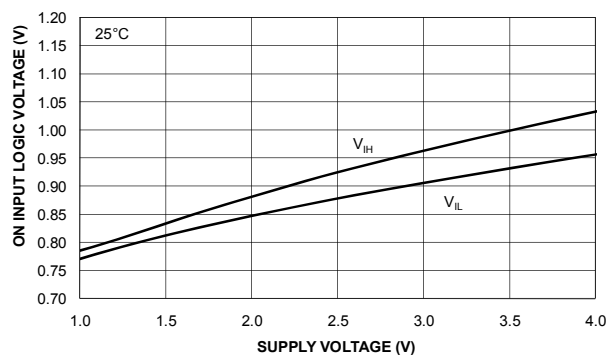


Figure 15. ON-Pin Threshold vs.  $V_{IN}$

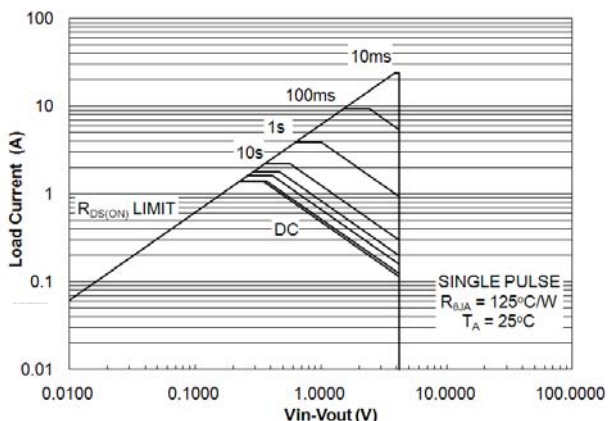


Figure 16. Load Current vs.  $V_{IN}-V_{OUT}$

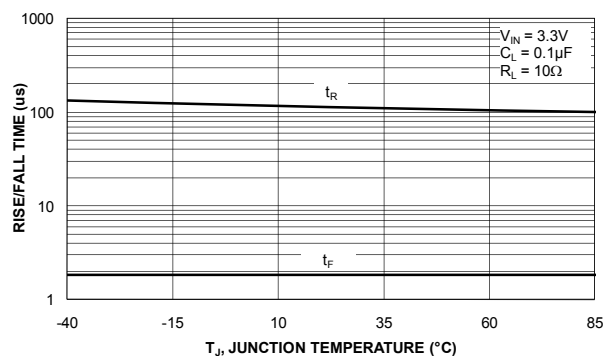


Figure 17.  $V_{OUT}$  Rise and Fall Time vs. Temperature at  $R_L=10\Omega$

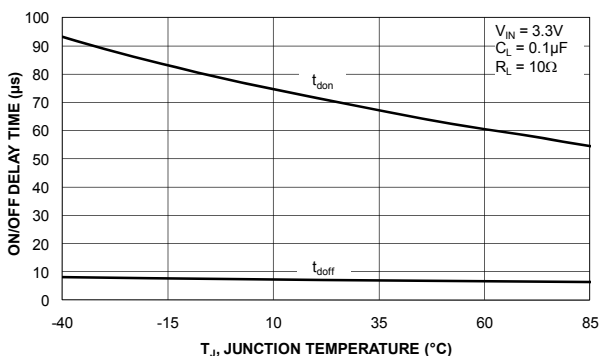


Figure 18.  $V_{OUT}$  Turn-On and Turn-Off Delay vs. Temperature at  $R_L=10\Omega$

## Typical Performance Characteristics

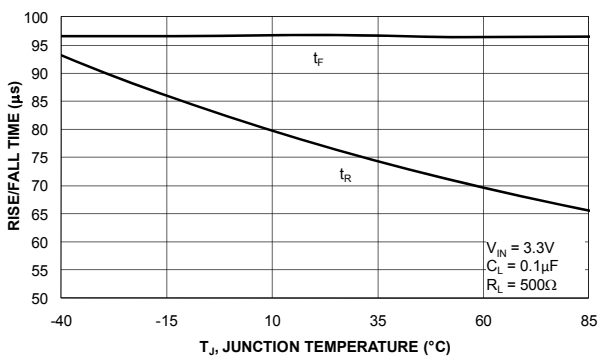


Figure 19.  $V_{OUT}$  Rise and Fall Time vs. Temperature at  $R_L=500\Omega$

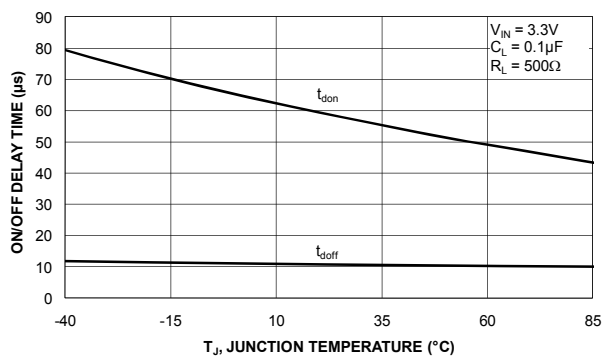


Figure 20.  $V_{OUT}$  Turn-On and Turn-Off Delay vs. Temperature at  $R_L=500\Omega$

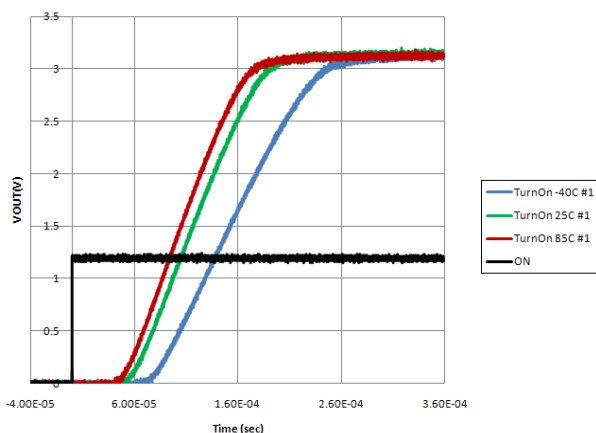


Figure 21. Turn-On Response ( $V_{IN}=3.3V$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $R_L=10\Omega$ )

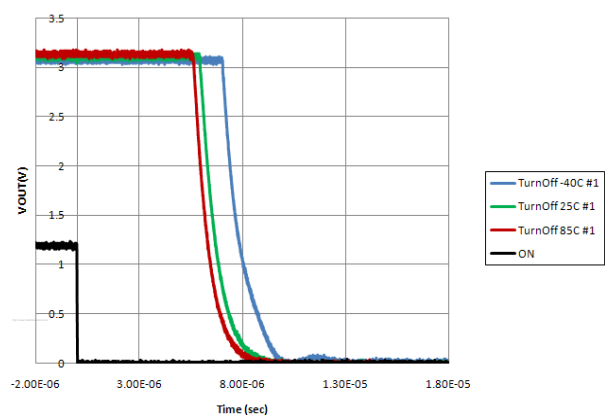


Figure 22. Turn-Off Response ( $V_{IN}=3.3V$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $R_L=10\Omega$ )

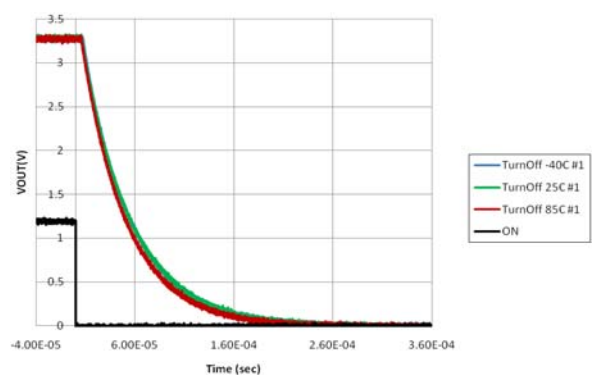


Figure 23. Turn-Off Response (FPF1205 = No Output Pull-Down Resistor) ( $V_{IN}=3.3V$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $R_L=500\Omega$ )

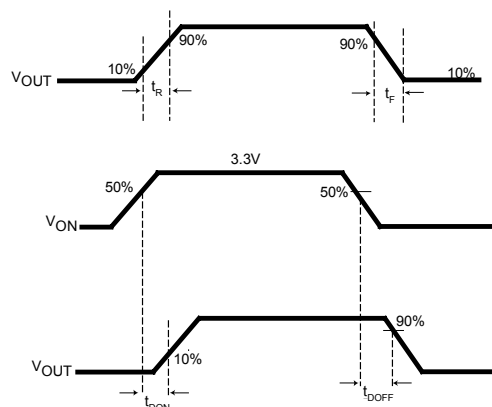


Figure 24. Timing Diagram

### Notes:

8.  $t_{ON}=t_R + t_{DON}$ .
9.  $t_{OFF}=t_F + t_{DOFF}$ .

## Operation and Application Description

The FPF1205 and FPF1206 are low- $R_{ON}$  P-channel load switches with controlled turn-on. The core of each device is a 50m $\Omega$  P-channel MOSFET and controller capable of functioning over a wide input operating range of 1.2 - 4.0V. The ON pin, an active HIGH GIOP / CMOS-compatible input, controls the state of the switch.

The FPF1206 contains a 65 $\Omega$  on-chip load resistor for quick output discharge when the switch is turned off.

### Input Capacitor

To limit the voltage drop on the input supply caused by transient inrush current when the switch turns on into a discharged load capacitor or short-circuit, a capacitor must be placed between the  $V_{IN}$  and GND pins. A 1 $\mu$ F ceramic capacitor,  $C_{IN}$ , placed close to the pins is usually sufficient. Higher-value  $C_{IN}$  can be used to reduce the voltage drop in higher-current applications.

### Output Capacitor

A 0.1 $\mu$ F capacitor,  $C_{OUT}$ , should be placed between the  $V_{OUT}$  and GND pins. This capacitor prevents parasitic

board inductance from forcing  $V_{OUT}$  below GND when the switch is on.  $C_{IN}$  greater than  $C_{OUT}$  is highly recommended.  $C_{OUT}$  greater than  $C_{IN}$  can cause  $V_{OUT}$  to exceed  $V_{IN}$  when the system supply is removed. This could result in current flow through the body diode from  $V_{OUT}$  to  $V_{IN}$ .

### Board Layout

For best performance, all traces should be as short as possible. To be most effective, the input and output capacitors should be placed close to the device to minimize the effect that parasitic trace inductance may have on normal and short-circuit operation. Using wide traces or large copper planes for all pins ( $V_{IN}$ ,  $V_{OUT}$ , ON, and GND) helps minimize the parasitic electrical effects along with minimizing the case ambient thermal impedance. However, the  $V_{OUT}$  pin of FPF1206 should not connect directly the battery source due to the discharge mechanism of the load switch.





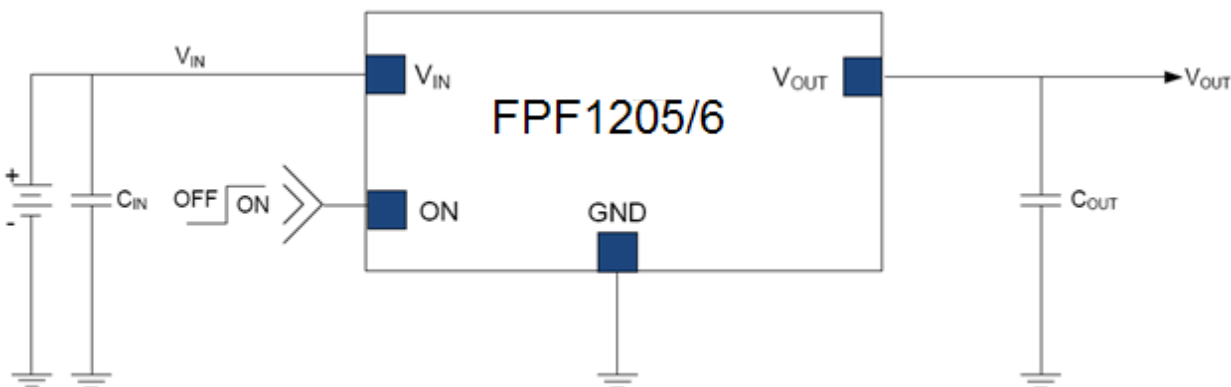


Figure 25. Typical Application

## Physical Dimensions

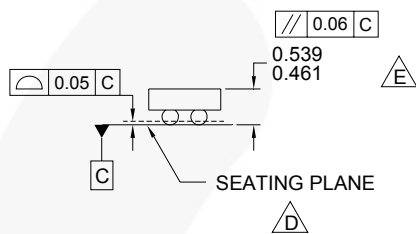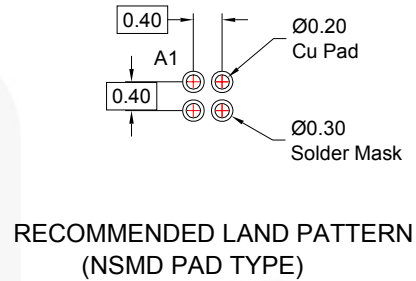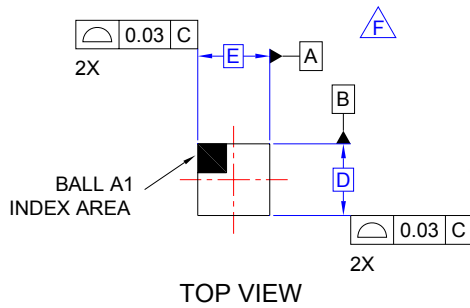

SIDE VIEWS

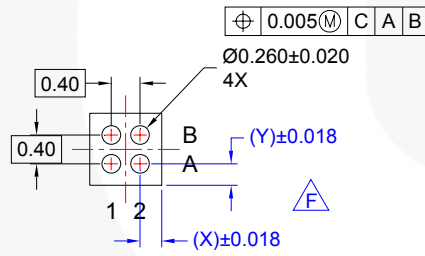

BOTTOM VIEW

### NOTES:

A. NO JEDEC REGISTRATION APPLIES.

B. DIMENSIONS ARE IN MILLIMETERS.

C. DIMENSIONS AND TOLERANCE PER ASME Y14.5M, 1994.

D. DATUM C IS DEFINED BY THE SPHERICAL CROWNS OF THE BALLS.

E. PACKAGE NOMINAL HEIGHT IS 500 MICRONS  $\pm 39$  MICRONS (461-539 MICRONS).

F. FOR DIMENSIONS D, E, X, AND Y SEE PRODUCT DATASHEET.

G. DRAWING FILNAME: MKT-UC004ARev1.

Figure 26. 4 Ball, 0.76 x 0.76 mm Wafer-Level Chip-Scale WLCSP Packaging

## Product-Specific Dimensions

| Product    | D                            | E                            | X                           | Y                           |
|------------|------------------------------|------------------------------|-----------------------------|-----------------------------|
| FPF1205UCX | 760 $\mu$ m $\pm$ 30 $\mu$ m | 760 $\mu$ m $\pm$ 30 $\mu$ m | 0.180mm $\pm$ 0.018 $\mu$ m | 0.180mm $\pm$ 0.018 $\mu$ m |
| FPF1206UCX | 760 $\mu$ m $\pm$ 30 $\mu$ m | 760 $\mu$ m $\pm$ 30 $\mu$ m | 0.180mm $\pm$ 0.018 $\mu$ m | 0.180mm $\pm$ 0.018 $\mu$ m |

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products. Always visit Fairchild Semiconductor's online packaging area for the most recent package drawing: <http://www.fairchildsemi.com/packaging/>.



## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™  
Auto-SPM™  
AX-CAP™  
Build it Now™  
CorePLUS™  
CorePOWER™  
CROSSVOLT™  
CTL™  
Current Transfer Logic™  
DEUXPEED®  
Dual Cool™  
EcoSPARK®  
EfficientMax™  
ESBC™  
  
Fairchild®  
Fairchild Semiconductor®  
FACT Quiet Series™  
FACT®  
FAST®  
FastvCore™  
FETBench™  
FlashWriter®  
FPS™

F-PFS™  
FRFET®  
Global Power Resource®  
Green FPS™  
Green FPS™ e-Series™  
Gmax™  
GTO™  
IntelliMAX™  
ISOPLANAR™  
MegaBuck™  
MICROCOUPLER™  
MicroFET™  
MicroPak™  
MicroPak2™  
MillerDrive™  
MotionMax™  
Motion-SPM™  
mWSaver™  
OptoHiT™  
OPTOLOGIC®  
OPTOPLANAR®  
PDP SPM™

Power-SPM™  
PowerTrench®  
PowerXS™  
Programmable Active Droop™  
QFET®  
QS™  
Quiet Series™  
RapidConfigure™  
  
Saving our world, 1mW/W/kW at a time™  
SignalWise™  
SmartMax™  
SMART START™  
SPM®  
STEALTH™  
SuperFET®  
SuperSOT™.3  
SuperSOT™.6  
SuperSOT™.8  
SupreMOS®  
SyncFET™  
Sync-Lock™  


The Power Franchise®  
The Right Technology for Your Success™

  
TinyBoost™  
TinyBuck™  
TinyCalc™  
TinyLogic®  
TINYOPTO™  
TinyPower™  
TinyPWM™  
TinyWire™  
TriFault Detect™  
TRUECURRENT™\*  
μSerDes™  
  
UHC®  
Ultra FRFET™  
UniFET™  
VCX™  
VisualMax™  
XS™

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status        | Definition                                                                                                                                                                                          |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. I52