

MINIATURE V.H.F. DOUBLE TRIODE

ECC91

Double triode with common cathode for use as
R.F. power amplifier or oscillator.

HEATER

V_h	6.3	V
I_h	0.45	A

CAPACITANCES (Each Unit)

c_{a-g}	1.6	μF
c_{in}	2.2	μF
c_{out}	0.4	μF

CHARACTERISTICS. (Each Unit)

V_a	100	V
I_a	8.5	mA
R_k	100	Ω
g_m	5.3	mA/V
μ	38	
r_a	7,100	Ω

OPERATING CONDITIONS AS CLASS C TELEGRAPHY PUSH-PULL R.F.
AMPLIFIER AND OSCILLATOR AT 80 Mc/s APPROX.

V_a	150	V
V_g *	-10	V
R_g	625	Ω
R_k	220	Ω
I_a	2x15	mA
I_g	2x8	mA
W_{drive}	0.35	W
W_{out}	3.5	W

* Obtained from a fixed supply or from a grid or cathode resistor of value shown.

NOTE: An output of 1 watt may be obtained from an ECC.91 in a push-pull oscillator at 250 Mc/s with $V_a = 150V$ $W_a = 2x1.5W$ and a common grid resistor of 2000 ohms.

LIMITING VALUES

V_a max	300	V
W_a max	2x1.5	W
V_g max	-40	V
I_g max	2x8	mA
V_{h-k} max	100	V
R_g max (self bias)	0.5	m Ω




ECC91


MINIATURE V.H.F. DOUBLE TRIODE

*Double triode with common cathode for use as
R.F. power amplifier or oscillator.*

ARRANGEMENT OF ELECTRODES
AND BASE CONNECTIONS

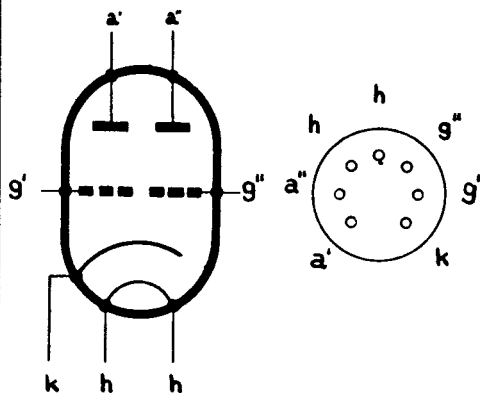


DIMENSIONS

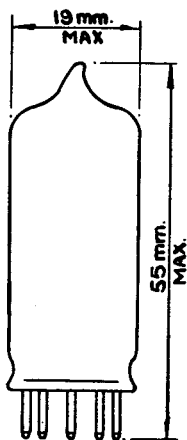

MINIATURE V.H.F. DOUBLE TRIODE

ECC91

Double triode with common cathode for use as
R.F. power amplifier or oscillator.

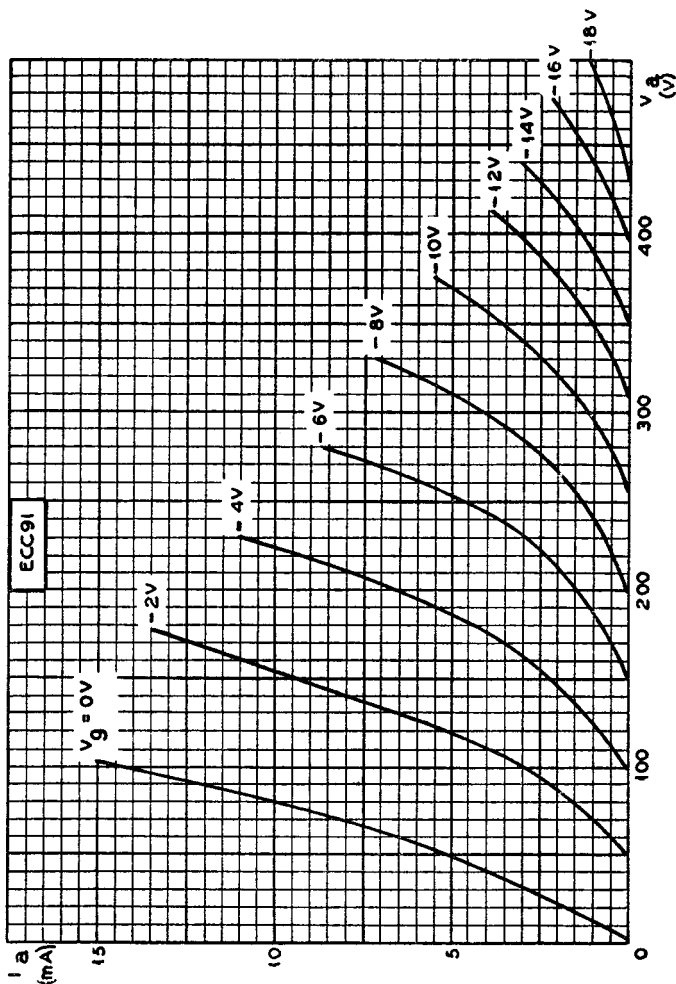

ECC91

MINIATURE V.H.F. DOUBLE TRIODE

Double triode with common cathode for use as
R.F. power amplifier or oscillator.

