



LG

website:<http://biz.LGservice.com>
e-mail:<http://www.LGEservice.com/techsup.html>

LCD TV **SERVICE MANUAL**

CHASSIS : LP62C

FACTORY MODEL : 37LC2R-TH / 42LC2R-TH

MODEL : 37LC2R / 42LC2R

CAUTION

BEFORE SERVICING THE CHASSIS,

READ THE SAFETY PRECAUTIONS IN THIS MANUAL



CONTENTS

CONTENTS	2
SAFETY PRECAUTIONS	3
SPECIFICATION	6
ADJUSTMENT INSTRUCTION.....	11
TROUBLE SHOOTING	16
BLOCK DIAGRAM.....	23
EXPLODED VIEW	25
REPLACEMENT PARTS LIST.....	28
SVC. SHEET	

SAFETY PRECAUTIONS

IMPORTANT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by  in the Schematic Diagram and Replacement Parts List.

It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent X-RADIATION, Shock, Fire, or other Hazards.

Do not modify the original design without permission of manufacturer.

General Guidance

An **isolation Transformer should always be used** during the servicing of a receiver whose chassis is not isolated from the AC power line. Use a transformer of adequate power rating as this protects the technician from accidents resulting in personal injury from electrical shocks.

It will also protect the receiver and its components from being damaged by accidental shorts of the circuitry that may be inadvertently introduced during the service operation.

If any fuse (or Fusible Resistor) in this TV receiver is blown, replace it with the specified.

When replacing a high wattage resistor (Oxide Metal Film Resistor, over 1W), keep the resistor 10mm away from PCB.

Keep wires away from high voltage or high temperature parts.

X-RAY Radiation

Warning:

The source of X-RAY RADIATION in this TV receiver is the High Voltage Section and the LCD PANEL.

For continued X-RAY RADIATION protection, the replacement panel must be the same type panel as specified in the Replacement Parts List.

To determine the presence of high voltage, use an accurate high impedance HV meter.

Adjust brightness, color, contrast controls to minimum.

Measure the high voltage.

The meter reading should indicate

$23.5 \pm 1.5\text{KV}$: 14-19 inch, $26 \pm 1.5\text{KV}$: 19-21 inch,

$29.0 \pm 1.5\text{KV}$: 25-29 inch, $30.0 \pm 1.5\text{KV}$: 32 inch

If the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure.

Before returning the receiver to the customer,

always perform an **AC leakage current check** on the exposed metallic parts of the cabinet, such as antennas, terminals, etc., to be sure the set is safe to operate without damage of electrical shock.

Leakage Current Cold Check(Antenna Cold Check)

With the instrument AC plug removed from AC source, connect an electrical jumper across the two AC plug prongs. Place the AC switch in the on position, connect one lead of ohm-meter to the AC plug prongs tied together and touch other ohm-meter lead in turn to each exposed metallic parts such as antenna terminals, phone jacks, etc.

If the exposed metallic part has a return path to the chassis, the measured resistance should be between $1\text{M}\Omega$ and $5.2\text{M}\Omega$. When the exposed metal has no return path to the chassis the reading must be infinite.

An other abnormality exists that must be corrected before the receiver is returned to the customer.

Leakage Current Hot Check (See below Figure)

Plug the AC cord directly into the AC outlet.

Do not use a line Isolation Transformer during this check.


Connect $1.5\text{K}/10\text{watt}$ resistor in parallel with a $0.15\mu\text{F}$ capacitor between a known good earth ground (Water Pipe, Conduit, etc.) and the exposed metallic parts.

Measure the AC voltage across the resistor using AC voltmeter with 1000 ohms/volt or more sensitivity.

Reverse plug the AC cord into the AC outlet and repeat AC voltage measurements for each exposed metallic part. Any voltage measured must not exceed 0.75 volt RMS which is corresponds to 0.5mA .

In case any measurement is out of the limits specified, there is possibility of shock hazard and the set must be checked and repaired before it is returned to the customer.

Leakage Current Hot Check circuit

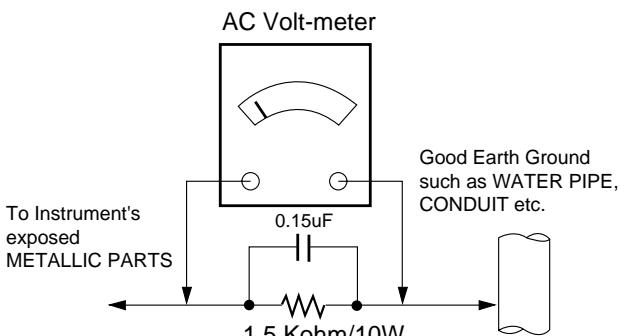

SERVICING PRECAUTIONS

CAUTION: Before servicing receivers covered by this service manual and its supplements and addenda, read and follow the **SAFETY PRECAUTIONS** on page 3 of this publication.

NOTE: If unforeseen circumstances create conflict between the following servicing precautions and any of the safety precautions on page 3 of this publication, always follow the safety precautions. Remember: Safety First.

General Servicing Precautions

1. Always unplug the receiver AC power cord from the AC power source before:
 - a. Removing or reinstalling any component, circuit board module or any other receiver assembly.
 - b. Disconnecting or reconnecting any receiver electrical plug or other electrical connection.
 - c. Connecting a test substitute in parallel with an electrolytic capacitor in the receiver.
- CAUTION:** A wrong part substitution or incorrect polarity installation of electrolytic capacitors may result in an explosion hazard.
2. Test high voltage only by measuring it with an appropriate high voltage meter or other voltage measuring device (DVM, FETVOM, etc) equipped with a suitable high voltage probe. Do not test high voltage by "drawing an arc".
3. Do not spray chemicals on or near this receiver or any of its assemblies.
4. Unless specified otherwise in this service manual, clean electrical contacts only by applying the following mixture to the contacts with a pipe cleaner, cotton-tipped stick or comparable non-abrasive applicator; 10% (by volume) Acetone and 90% (by volume) isopropyl alcohol (90%-99% strength)
- CAUTION:** This is a flammable mixture. Unless specified otherwise in this service manual, lubrication of contacts is not required.
5. Do not defeat any plug/socket B+ voltage interlocks with which receivers covered by this service manual might be equipped.
6. Do not apply AC power to this instrument and/or any of its electrical assemblies unless all solid-state device heat sinks are correctly installed.
7. Always connect the test receiver ground lead to the receiver chassis ground before connecting the test receiver positive lead. Always remove the test receiver ground lead last.
8. *Use with this receiver only the test fixtures specified in this service manual.*

CAUTION: Do not connect the test fixture ground strap to any heat sink in this receiver.

Electrostatically Sensitive (ES) Devices

Some semiconductor (solid-state) devices can be damaged easily by static electricity. Such components commonly are called **Electrostatically Sensitive (ES) Devices**. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by static by static electricity.

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any electrostatic charge on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging wrist strap device, which should be removed to prevent potential shock reasons prior to applying power to the

unit under test.

2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
 3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
 4. Use only an anti-static type solder removal device. Some solder removal devices not classified as "anti-static" can generate electrical charges sufficient to damage ES devices.
 5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
 6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
 7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.
- CAUTION:** Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.
8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity sufficient to damage an ES device.)

General Soldering Guidelines

1. Use a grounded tip, low-wattage soldering iron and appropriate tip size and shape that will maintain tip temperature within the range of 500 °F to 600 °F.
2. Use an appropriate gauge of RMA resin-core solder composed of 60 parts tin/40 parts lead.
3. Keep the soldering iron tip clean and well tinned.
4. Thoroughly clean the surfaces to be soldered. Use a small wire-bristle (0.5 inch, or 1.25cm) brush with a metal handle. Do not use freon-propelled spray-on cleaners.
5. Use the following unsoldering technique
 - a. Allow the soldering iron tip to reach normal temperature. (500 °F to 600 °F)
 - b. Heat the component lead until the solder melts.
 - c. Quickly draw the melted solder with an anti-static, suction-type solder removal device or with solder braid.

CAUTION: Work quickly to avoid overheating the circuitboard printed foil.
6. Use the following soldering technique.
 - a. Allow the soldering iron tip to reach a normal temperature (500 °F to 600 °F)
 - b. First, hold the soldering iron tip and solder the strand against the component lead until the solder melts.
 - c. Quickly move the soldering iron tip to the junction of the component lead and the printed circuit foil, and hold it there only until the solder flows onto and around both the component lead and the foil.

CAUTION: Work quickly to avoid overheating the circuit board printed foil.
- d. Closely inspect the solder area and remove any excess or splashed solder with a small wire-bristle brush.

IC Remove/Replacement

Some chassis circuit boards have slotted holes (oblong) through which the IC leads are inserted and then bent flat against the circuit foil. When holes are the slotted type, the following technique should be used to remove and replace the IC. When working with boards using the familiar round hole, use the standard technique as outlined in paragraphs 5 and 6 above.

Removal

1. Desolder and straighten each IC lead in one operation by gently prying up on the lead with the soldering iron tip as the solder melts.
2. Draw away the melted solder with an anti-static suction-type solder removal device (or with solder braid) before removing the IC.

Replacement

1. Carefully insert the replacement IC in the circuit board.
2. Carefully bend each IC lead against the circuit foil pad and solder it.
3. Clean the soldered areas with a small wire-bristle brush.
(It is not necessary to reapply acrylic coating to the areas).

"Small-Signal" Discrete Transistor Removal/Replacement

1. Remove the defective transistor by clipping its leads as close as possible to the component body.
2. Bend into a "U" shape the end of each of three leads remaining on the circuit board.
3. Bend into a "U" shape the replacement transistor leads.
4. Connect the replacement transistor leads to the corresponding leads extending from the circuit board and crimp the "U" with long nose pliers to insure metal to metal contact then solder each connection.

Power Output, Transistor Device Removal/Replacement

1. Heat and remove all solder from around the transistor leads.
2. Remove the heat sink mounting screw (if so equipped).
3. Carefully remove the transistor from the heat sink of the circuit board.
4. Insert new transistor in the circuit board.
5. Solder each transistor lead, and clip off excess lead.
6. Replace heat sink.

Diode Removal/Replacement

1. Remove defective diode by clipping its leads as close as possible to diode body.
2. Bend the two remaining leads perpendicular to the circuit board.
3. Observing diode polarity, wrap each lead of the new diode around the corresponding lead on the circuit board.
4. Securely crimp each connection and solder it.
5. Inspect (on the circuit board copper side) the solder joints of the two "original" leads. If they are not shiny, reheat them and if necessary, apply additional solder.

Fuse and Conventional Resistor Removal/Replacement

1. Clip each fuse or resistor lead at top of the circuit board hollow stake.
2. Securely crimp the leads of replacement component around notch at stake top.
3. Solder the connections.

CAUTION: Maintain original spacing between the replaced component and adjacent components and the circuit board to prevent excessive component temperatures.

Circuit Board Foil Repair

Excessive heat applied to the copper foil of any printed circuit board will weaken the adhesive that bonds the foil to the circuit board causing the foil to separate from or "lift-off" the board. The following guidelines and procedures should be followed whenever this condition is encountered.

At IC Connections

To repair a defective copper pattern at IC connections use the following procedure to install a jumper wire on the copper pattern side of the circuit board. (Use this technique only on IC connections).

1. Carefully remove the damaged copper pattern with a sharp knife. (Remove only as much copper as absolutely necessary).
2. carefully scratch away the solder resist and acrylic coating (if used) from the end of the remaining copper pattern.
3. Bend a small "U" in one end of a small-gauge jumper wire and carefully crimp it around the IC pin. Solder the IC connection.
4. Route the jumper wire along the path of the out-away copper pattern and let it overlap the previously scraped end of the good copper pattern. Solder the overlapped area and clip off any excess jumper wire.

At Other Connections

Use the following technique to repair the defective copper pattern at connections other than IC Pins. This technique involves the installation of a jumper wire on the component side of the circuit board.

1. Remove the defective copper pattern with a sharp knife. Remove at least 1/4 inch of copper, to ensure that a hazardous condition will not exist if the jumper wire opens.
2. Trace along the copper pattern from both sides of the pattern break and locate the nearest component that is directly connected to the affected copper pattern.
3. Connect insulated 20-gauge jumper wire from the lead of the nearest component on one side of the pattern break to the lead of the nearest component on the other side.
Carefully crimp and solder the connections.

CAUTION: Be sure the insulated jumper wire is dressed so the it does not touch components or sharp edges.

SPECIFICATION

NOTE : Specifications and others are subject to change without notice for improvement.

1. Application range

This specification is applied to LP62C chassis.

2. Requirement for Test

Testing for standard of each part must be followed in below condition.

3. Test method

3.1 Performance : LGE TV test method followed

3.2 Demanded other specification

Safety : CE, IEC Specification

EMC : CE, IEC

- (1) Temperature : $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ ($77 \pm 9^{\circ}\text{F}$), CST : 40 ± 5
 - (2) Humidity : $65\% \pm 10\%$
 - (3) Power : Standard input voltage (AC 100-240V, 50/60Hz)
*Standard Voltage of each products is marked by models
 - (4) Specification and performance of each parts are followed
each drawing and specification by part number in
accordance with BOM.
 - (5) The receiver must be operated for about 20 minutes prior
to the adjustment.

4. General TV Specification

No	Item	Specification	Remark
1.	Video input applicable system	PAL-D/K, B/G, I, NTSC-M, SECAM, NTSC 4.43	
2.	Receivable Broadcasting System	1) PAL/SECAM BG 2) PAL/SECAM DK 3) PAL I/I 4) SECAM L/L' 5) PAL-N/M 6) NTSC M	only ZH
3.	RF Input Channel	VHF : E2 ~ E12 UHF : E21 ~ E69 CATV : S1 ~ S20 HYPER : S21 ~ S47 L/L' : B, C, D VHF : 2~13 UHF : 14~69 CATV : 1~125	PAL FRANCE NTSC
4.	Input Voltage	AC 100 ~ 240 V/50Hz, 60Hz	
5.	Market	Worldwide	
6.	Active Screen Size	940.3 mm(diagonal) 1067.308 mm (diagonal)	37.02 inches 42.02 inches
7.	Tuning System	FVS 100 program FS	
8.	Operating Environment	1) Temp : 0 ~ 40 deg 2) Humidity : 10 ~ 90 %RH	
9.	Storage Environment	1) Temp : -20 ~ 50 deg 2) Humidity : 10 ~ 90 %RH	
10.	Display	LCD Module	32"/42" : LPL 37" : AUO, LPL

5. General Specification

No	Item	Specification		Remark
1	Panel	37", 42" TFT WXGA LCD		
2	Frequency range	H : 31 ~ 61KhzV : 56 ~ 75Hz		PC Input
3	Control Function	1) Contrast/Brightness 2) H-Position / V-Position 3) Tracking : Clock / Phase 4) Auto Configure 5) Reset		
4	Component Jack (480i/576i/480p/576p/720p/1080i)	Y/Pb/Pr : 1EA Y/Pb/Pr : 2EA		ZH TH
5	Power ON	LED	Power consumption	
		White	$\leq 190W(37")$ $\leq 230W(42")$	
	Stand by	RED	$\leq 1W$	
6	LCD Module	Outline Dimension	37"	877.0 x 516.8 x 55.5
			42"	1006 x 610 x 56
		Pixel Pitch	37"	0.200 x 0.600 x RGB
			42"	0.227 x 0.681 x RGB
		Pixel Format		1366 x 768 Pixels RGB strip arrangement
		Coating		Hard coating(3H), Anti-glare treatment of the front polarizer,
		Back Light	37"	16CCFL
			42"	20CCFL

6. Set Optical Feature

6.1. 37LC2R-TH/42LC2R-TH

No	Parameter	Symbol	Value			Unit	Remark
			Min	Typ	Max		
1.	Contrast Ratio	CR	37"	800	1200		(*) Normal Mode - 100IRE Full white window pattern - APC : Clear (Dynamic)
			42"	700	1000		
2.	Surface Luminance, white	LWH	360	450		Cd/m ²	(*) Normal Mode - 100IRE Full white window pattern - APC : Clear (Dynamic)
3.	White Coordinate	Normal	X axis	0.280	0.283	0.286	- 85IRE Full White Pattern - APC : Standard
			Y axis	0.295	0.298	0.301	
		Cool	X axis	0.271	0.274	0.277	
			Y axis	0.283	0.286	0.289	
		Warm	X axis	0.300	0.303	0.306	
			Y axis	0.316	0.319	0.322	
4.	Color Temperature	Normal	8300	9300	10300		- 85IRE Full White Pattern - APC : Standard
		Warm	6200	7200	8200		
		Cool	10000	11000	12000		
5.	Color pull in Range	PAL	-500		+500	Hz	
		NTSC	-500		+500	Hz	
6.	Color killer Sensitivity				-80	dBm	

6.2. 37LC2R-TH/37LC2R-ZH(Only AUO Module)

No	Parameter	Symbol		Value			Unit	Remark
				Min	Typ	Max		
1.	Contrast Ratio	CR	32", 37"	800	1200			(*) Normal Mode - 100IRE Full white window pattern - APC : Clear (Dynamic)
			42"	700	1000			
2.	Surface Luminance, white	LWH	360	450			Cd/m ²	(*) Normal Mode - 100IRE Full white window pattern APC : Clear (Dynamic)
3.	White Coordinate	Normal Cool Warm	X axis	0.280	0.283	0.286		- 85IRE Full White Pattern - APC : Standard
			Y axis	0.295	0.298	0.301		
			X axis	0.271	0.274	0.277		
			Y axis	0.283	0.286	0.289		
			X axis	0.300	0.303	0.306		
			Y axis	0.316	0.319	0.322		
4.	Color Temperature	Normal		8300	9300	10300		- 85IRE Full White Pattern - APC : Standard
		Warm		6200	7200	8200		
		Cool		10000	11000	12000		
5.	Color pull in Range	PAL	-500		+500	Hz		
		NTSC	-500		+500	Hz		
6.	Color killer Sensitivity				-80	dBm		

7. Model Specification

No	Item	Specification	Remark
1.	Market	N-EU	
2.	Broadcasting system	PAL/BG/IDK, NTSC-M	
3.	Available Channel	BAND	PAL NTSC
		VHF/UHF	C1 ~ C69 2~83
		CATV	S1 ~ S47 1~71
4.	Receiving system	Upper Heterodyne	
5.	SCART Jack(0EA)	PAL, SECAM, NTSC	
6.	Video Input (2EA)	PAL, SECAM, NTSC	4 System : PAL, SECAM, NTSC, PAL60
7.	S-Video Input (2EA)	PAL, SECAM, NTSC	4 System : PAL, SECAM, NTSC, PAL60
8.	Component Input (1EA)	Y/Cb/Cr, Y/ Pb/Pr	
9.	RGB Input (1EA)	RGB-PC, RGB-DTV	
10.	HDMI Input (2EA)	HDMI-PC HDMI-DTV	
11.	Audio Input (4EA)	PC Audio, Component (1EA), AV (2EA)	L/R Input
12.	Wired Control (1EA)		
13.	Audio variable out(1EA)		

8. Component Video Input (Y, PB, PR)

No	Resolution	H-freq(kHz)	V-freq.(kHz)	Pixel clock(MHz)	Remarks
1.	720 x 480	15.73	59.94	13.500	SDTV, DVD 480I(525I)
2.	720 x 480	15.75	60.00	13.514	SDTV, DVD 480I(525I)
3.	720 x 576	15.625	50.00	13.500	SDTV, DVD 576I(625I)
4.	720 x 480	31.47	59.94	27.000	SDTV 480P
5.	720 x 480	31.50	60.00	27.027	SDTV 480P
6.	720 x 576	31.25	50.00	27.000	SDTV 576P
7.	1280 x 720	44.96	59.94	74.176	HDTV 720P
8.	1280 x 720	45.00	60.00	74.250	HDTV 720P
9.	1280 x 720	37.50	50.00	74.25	HDTV 720P 50Hz
10.	1920 x 1080	33.72	59.94	74.176	HDTV 1080I
11.	1920 x 1080	33.75	60.00	74.250	HDTV 1080I
12.	1920 x 1080	28.125	50.00	74.250	HDTV 1080I 50Hz

9. RGB Input (PC)

No	Resolution	H-freq(kHz)	V-freq.(kHz)	Pixel clock(MHz)	Remarks
1	720 x 400	31.469	70.08	28.32	DOS
2.	640 x 480	31.469	59.94	25.17	VESA(VGA)
3	640 x 480	37.500	75.00	31.50	VESA(VGA)
4	800 x 600	37.879	60.31	40.00	VESA(SVGA)
5	800 x 600	46.875	75.00	49.50	VESA(SVGA)
6	832 x 624	49.725	74.55	57.28	Macintosh
7	1024 x 768	48.363	60.00	65.00	VESA(XGA)
8	1024 x 768	56.476	70.06	75.00	VESA(XGA)
9	1024 x 768	60.023	75.02	78.75	VESA(XGA)
10	1280 x 768	47.693	59.99	80.125	WXGA(42XGA,50", 60")
11	1360 x 768	47.700	60.00	84.62	WXGA(42XGA,50", 60")
12	1366 x 768	47.700	60.00	84.62	WXGA(42XGA,50", 60")

10. RGB input (DTV)

No	Resolution	H-freq(kHz)	V-freq.(kHz)	Pixel clock(MHz)	Remarks
1.	720 x 480	31.47	59.94	27.000	SDTV 480P
2.	720 x 480	31.50	60.00	27.027	SDTV 480P
3.	720 x 576	31.25	50.00	27.000	SDTV 576P
4.	1280 x 720	44.96	59.94	74.176	HDTV 720P
5.	1280 x 720	45.00	60.00	74.250	HDTV 720P
6.	1280 x 720	37.50	50.00	74.25	HDTV 720P 50Hz
7.	1920 x 1080	33.72	59.94	74.176	HDTV 1080I
8.	1920 x 1080	33.75	60.00	74.250	HDTV 1080I
9.	1920 x 1080	28.125	50.00	74.250	HDTV 1080I 50Hz

11. HDMI Input (PC)

No	Resolution	H-freq(kHz)	V-freq.(kHz)	Pixel clock(MHz)	Remarks
1	720 x 400	31.469	70.08	28.32	DOS
2	640 x 480	31.469	59.94	25.17	VESA(VGA)
3	640 x 480	37.500	75.00	31.50	VESA(VGA)
4	800 x 600	37.879	60.31	40.00	VESA(SVGA)
5	800 x 600	46.875	75.00	49.50	VESA(SVGA)
6.	832 x 624	49.725	74.55	57.28	Macintosh
7	1024 x 768	48.363	60.00	65.00	VESA(XGA)
8	1024 x 768	56.476	70.06	75.00	VESA(XGA)
9	1024 x 768	60.023	75.02	78.75	VESA(XGA)
10	1280 x 768	47.693	59.99	80.125	WXGA(42XGA,50", 60")
11	1360 x 768	47.700	60.00	84.62	WXGA(42XGA,50", 60")
12	1366 x 768	47.700	60.00	84.62	WXGA(42XGA,50", 60")

12. HDMI input (DTV)

No	Resolution	H-freq(kHz)	V-freq.(kHz)	Pixel clock(MHz)	Remarks
1.	720 x 480	31.47	59.94	27.000	SDTV 480P
2.	720 x 480	31.50	60.00	27.027	SDTV 480P
3.	720 x 576	31.25	50.00	27.000	SDTV 576P
4.	1280 x 720	44.96	59.94	74.176	HDTV 720P
5.	1280 x 720	45.00	60.00	74.250	HDTV 720P
6.	1280 x 720	37.50	50.00	74.25	HDTV 720P 50Hz
7.	1920 x 1080	33.72	59.94	74.176	HDTV 1080I
8.	1920 x 1080	33.75	60.00	74.250	HDTV 1080I
9.	1920 x 1080	28.125	50.00	74.250	HDTV 1080I 50Hz

13. Mechanical Specification

13.1. 37LC2R

No	Item	Content				Remark	
		Width	Length	Height	Unit		
1.	Product Dimension	Before Packing	944	286	726	mm	SET(With Stand)
		After Packing	1052	383	855	mm	
2.	ProductWeight	Only SET		31	Kg		
		With BOX		33.3	Kg		

13.2. 42LC2R

No	Item	Content				Remark
1.	Product Dimension	Width	Length	Height	Unit	SET(With Stand)
		Before Packing	1054	286	813.5	
		After Packing	1166	402	950	
2.	ProductWeight	Only SET	37			
		With BOX	42.3			

ADJUSTMENT INSTRUCTION

1. Application Range

This spec. sheet is applied to all of the LP62A/B/C chassis(H3-High) manufactured at LG TV Plant all over the world.


2. Specification

- 2.1 Because this is not a hot chassis, it is not necessary to use an isolation transformer. However, the use of isolation transformer will help to protect test instruments.
- 2.2 Adjustment must be done in the correct sequence.
- 2.3 The adjustment must be performed at $25 \pm 5^\circ\text{C}$ temperature and $65 \pm 10\%$ relative humidity if there is no specified designation.
- 2.4 The input voltage of the receiver must be kept between 100~220V, 50/60Hz.
- 2.5 Before adjustment, execute Heat-Run for 30 minutes at RF no signal

3. Adjustment items

3.1 PCB assembly adjustment items

- Channel memory
- Download the channel data from BOM to EEPROM by using LGIDS.
- Option adjustment following BOM
- Tool Option1
- Tool Option2
- Area Option

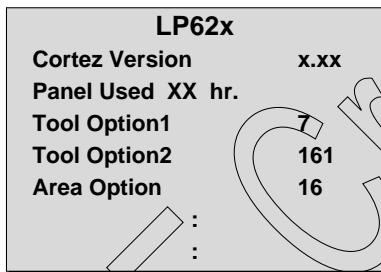

(Fig. 1)

- 1) Push the ADJ key in the Adjust Remocon.
 - 2) Input the Option Number that was specified in the BOM, into the Shipping area.
 - 3) Select "Tool Option1/ Tool Option2/ Area Option" by using ▲/▼(CH+/-) key and press the number key(0~9) consecutively
- ex) If the value of Tool Option1 is 7, input the data using number key "7" (Fig. 1)

3.2 SET assembly adjustment items

- Auto AV(ZH-AV3, TH-AV1) Color Balance
- Aging (by Power on key)
- Adjustment of White Balance
- Auto Component Color Balance adjustment
 - Standard equipment : MSPG925FA
- Auto RGB Color Balance adjustment
 - Standard equipment : MSPG925FA

4. EDID

Caution

- * Use the proper signal cable for EDID Download
 - Analog EDID : Pin3 exists
 - Digital EDID : Pin3 exists
- => Caution: - Never connect HDMI & DVI-D & DVI-A Cable at the same time.
- Use the proper cables below for EDID Writing

4.1 EDID Data

4.1.1. ANALOG(256 Bytes)

• BLOCK1 (128BYTE)

	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F
00	00	FF	FF	FF	FF	FF	FF	00	1E	6D	a	b				
10	c	01	03	01	46	27	78	EA	D9	B0	A3	57	49	9C	25	
20	11	49	4B	A5	6E	80	31	40	01	01	01	01	45	40	01	01
30	61	40	01	01	01	01	1B	21	50	A0	51	00	1E	30	48	88
40	35	00	BC	88	21	00	00	1C	4E	1F	00	80	51	00	1E	30
50	40	80	37	00	BC	88	21	00	00	18	00	00	00	FD	00	38
60	4B	1F	3D	09	00	0A	20	20	20	20	20	20	20	d		
70															00	99

4.1.2. HDMI(256 Bytes)

• BLOCK1 (128BYTE)

	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F
00	00	FF	FF	FF	FF	FF	FF	00	1E	6D	a	b				
10	c	01	03	80	46	27	78	EA	D9	B0	A3	57	49	9C	25	
20	11	49	4B	A5	6E	80	31	40	01	01	01	01	45	40	01	01
30	61	40	01	01	01	01	1B	21	50	A0	51	00	1E	30	48	88
40	35	00	BC	88	21	00	00	1C	4E	1F	00	80	51	00	1E	30
50	40	80	37	00	BC	88	21	00	00	18			d			
60														00	00	00
70	00	38	4B	1F	3D	09	00	0A	20	20	20	20	20	20	01	14

BLOCK2 (128BYTE)

	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F
00	02	03	24	F1	49	85	04	02	01	03	11	12	13	14	23	09
10	07	07	23	09	07	07	23	09	07	07	83	01	00	00	65	03
20	0C	00	10	00	01	1D	00	80	51	D0	1C	20	40	80	35	00
30	BC	88	21	00	00	1E	8C	0A	D0	8A	20	E0	2D	10	10	3E
40	96	00	13	8E	21	00	00	18	2A	12	00	10	41	43	17	20
50	28	60	35	00	00	00	32	00	00	1C	01	1D	80	18	71	1C
60	16	20	58	2C	25	00	C4	8E	21	00	00	9E	00	00	00	00
70	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	6B

=> Detail EDID Options are below (a, b, c, d, e)

a. Product ID

Model Name	Product ID	Product ID		
		Dec	Hex	EDID table
37LC2R	30059(A)	30059	756B	6B75
	30060(D)	30060	756C	6C75
42LC2R	40023(A)	40023	9C57	579C
	40024(D)	40024	9C58	589C

b. Serial No : Controlled on production line

c. Month, Year : Controlled on production line:

ex) Monthly : '03' => '03'

Year : '2005' => '0F'

d. Model Name/Monitor Name:

Model Name																		
37LC2R-TH	00	00	00	FC	00	33	37	4C	43	32	52	2D	54	48	0A	20	20	20
42LC2R-TH	00	00	00	FC	00	34	32	4C	43	32	52	2D	54	48	0A	20	20	20


e. Checksum: Changeable by total EDID data

5. ADC Calibration

5.1 Adjustment of RF/AV/S-VIDEO

* Required Equipments

- Remote controller for adjustment
 - 802F Pattern Generator, Master (MSPG-925FA), etc.
 - MSPG-925FA Pattern Generator
(Which has Video Signal: 100% Color Bar Pattern shown in Fig. 1)
- ⇒ Model : 202 / Pattern: 33 (PAL : ZH, TH)
Model : 201 / Pattern : 33 (NTSC : MH)

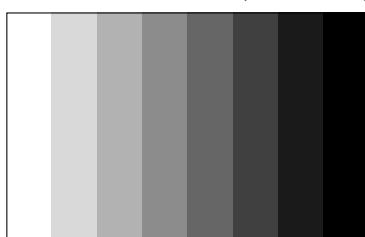

(Fig. 1)

5.1.1 Method of Auto RF/AV/S-VIDEO Color Balance.

- 1) Press the FRONT-AV KEY on R/C for converting input mode.
- 2) Input the Video Signal: 100% Color Bar signal into AV3(ZH), AV1(TH), VIDEO1(MH)
- 3) Set the PSM to Standard mode in the Picture menu.
- 4) Press INSTANT key on R/C for adjustment.
- 5) Press the ▶(Vol.+) key to operate the set , then it becomes automatically
- 6) Auto-RGB OK means the adjustment is completed

5.1.2 Requirement

- This AV color balance adjustment should be performed before White Balance Adjustment.
- After color balance adjustment, You must push "power on" key. ("Power on" key is "Access Heat_run mode")


5.2 Adjustment of Component.

* Required Equipments

- Remote controller for adjustment
 - 802F Pattern Generator, Master (MSPG-925FA), etc.
 - MSPG-925FA Pattern Generator
(Which has 720p YPbPr signal : 100% Color Bar Pattern shown in Fig. 2)
- ⇒ Model: 217 / Pattern: 33
- It is very import to use correct adjustment pattern like Fig. 2.
- Within the pattern, color sequence should be aligned : W-Y-C-G-M-R-BLUE-BLACK
(If color sequence is reversed (Black -> ... -> White), reverse the pattern with REV key, when using

Master pattern generator like MSPG-925)

- If Minimum Black Level and/or Maximum White Level is not correct, Do select 100% Color Bar Pattern.

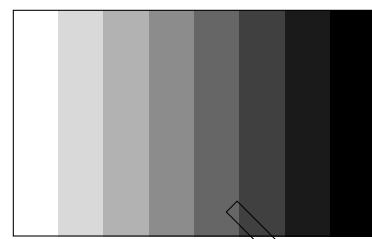

(Fig. 2)


5.2.1 Method of Auto Component Color Balance

- 1) Input the Component 720p 100% Color Bar(MSPG-925FA model:217, pattern:33) signal into Component . (ZH : component , TH/MH : component 1 or 2)
- 2) Set the PSM to Standard mode in the Picture menu.
- 3) Press the INSTANT key on R/C for adjustment.
- 4) Press the ▶(Vol. +) key to operate the set , then it becomes automatically.
- 5) Auto-RGB OK means the adjustment is completed.

5.3 Adjustment of RGB

* Required Equipments

- Remote controller for adjustment
- 802F Pattern Generator, Master (MSPG-925FA), etc.
- MSPG-925FA Pattern Generator
(Which has XGA [1024x768] 60Hz PC Format output signal : 100% Color Bar Pattern shown in Fig. 3)
- It is very import to use correct adjustment pattern like Fig. 10.
- Within the pattern, color sequence should be aligned : W-Y-C-G-M-R-BLUE-BLACK
(If color sequence is reversed (Black -> ... -> White), reverse the pattern with REV key, when using Master pattern generator like MSPG-925)
- If Minimum Black Level and/or Maximum White Level is not correct, Do select 100% Color Bar Pattern.

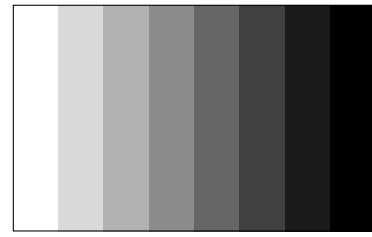

(Fig. 3)

5.3.1 Method of Auto RGB Color Balance

- 1) Input the PC 1024x768@60Hz 1/2 Black&White Pattern (MSPG-925FA model:3, pattern:33) into RGB.
- 2) Set the PSM to Standard mode in Picture menu.
- 3) Press the INSTANT key on R/C for adjustment.
- 4) Press the ▶(Vol. +) key operate To set , then it becomes automatically.
- 5) Auto-RGB OK means adjustment is completed.

=> Caution : Before White-balance, the AV ADC should be done. (ZH:AV3, TH:AV1, MH:VIDEO1)

=> After Aging, When the procedure is changed White balance adjustment, it will be canceled Heat_run mode auto.

(Notice : Before White-balance, change input mode Move to AV3(ZH) or AV1(TH) or VIDEO1(MH) by using the FRONT-AV KEY on Remote controller.)

6. White Balance

White balance	ZH(AV3), TH(AV1)	MH(VIDEO1)
MSPG925FA	216 Level (85IRE)	Model : 202
	Full screen pattern	• Pal Video • NTSC Video

=> Caution : - System control RS-232 Host should be "PC" for adjustment.
- AV ADC(ZH: AV3, TH : AV1, MH: VIDEO1)
should be done before White-balance.

* Test Equipment

Color Analyzer (CA-110)

PC(For communication through RS-232C)=>UART

Baud rate : 115200

Pattern Generator (MSPG-925FA etc.)

*Target Value [PSM: Standard(ZH/TH), CSM: Normal]

- Normal(9300K±1000K) x:283±0.015, y: 298±0.015

-Luminance(Y) AV/COMP: 250 Cd/m² (Typ: 300 Cd/m²)
PC : 300 Cd/m² (Typ: 350 Cd/m²)


=> Reference Value(Automatically fixed)

- Cool(11000K±1000K)

- Warm(7200K±1000K)

6.1 Manual white Balance (AV)

- 1) Execute CA-110 Zero Calibration.
- 2) Execute the SET Heat Run for 30minutes
- 3) As below Fig. 4, Supply 216Level (85 IRE) full screen pattern to Video input.
37LC2R-ZH,42LC2R-ZH : AV3/AV4 (Input 50Hz),
32LB1R-TH : AV1/AV2 (Input 50Hz)
- 4) Press the FRONT-AV KEY on R/C for converting input mode.
- 5) Set the PSM to Standard mode in Picture menu.
- 6) Enter the White Balance adjustment mode by pressing the INSTART key twice(White Balance) on R/C.
- 7) Stick sensor to center of the screen and select each items (Red/Green/Blue Gain and Offset) using ▲/▼(CH+/-) key on R/C.
- 8) Adjust Only High Light with R Gain/B Gain using ◀/▶ (VOL +/-) key on R/C.
- 9) Adjust it until color coordination becomes as below.
X-axis : 0.283±0.003
Y-axis : 0.298±0.003
- 10) Adjust High light with R/B Gain.



(Fig.4)

6.2 Auto white Balance (AV)

1) LPL Module

	Command1	Command2	Set ID	Data	
				Min	Max
Input Select	XB	B	00	00h	90h
R-Gain	J	A	00	00h	E0h
G-Gain	J	B	00	00h	E0h
B-Gain	J	C	00	00h	E0h
R-Offset	J	D	00	00h	90h
G-Offset	J	E	00	00h	90h
B-Offset	J	F	00	00h	90h

2) AUO Module


	Command1	Command2	Set ID	Data	
				Min	Max
Input Select	XB	B	00	00h	90h
R-Gain	J	A	00	00h	E0h
G-Gain	J	B	00	00h	E0h
B-Gain	J	C	00	00h	E0h
R-Offset	J	D	00	00h	90h
G-Offset	J	E	00	00h	90h
B-Offset	J	F	00	00h	90h

7. Shipping Conditions

No	Item		Condition	Remark	
1	Power		Off		
2	Volume Level		30		
3	Main Picture Input		TV		
4	Main Last Channel		Pr 01		
5	Mute		Off		
6	ARC		16 : 9		
7	Station	Auto Programme			
		Manual Programme			
		Programme Edit			
		Favorite Programme		None	
8	Picture	PSM		Dynamic	
		Dynamic	Contrast	100	
			Brightness	50	
			Colour	50	
			Sharpness	50	
		CSM		Normal	
		XD		Auto	
		Advanced			
		Reset			
9	Sound	SSM		Flat	
		AVL		Off	
		Balance		0	
		Speaker		50	
		Speaker		On	
10	Time	Clock		--:	
		Off time		Off	
		On time		Off	
		Auto sleep		Off	
11	Special	Language		English	
		Child Lock		Off	
		Set ID		1	
		XD Demo		To start	
12	Screen	Auto config.		Variable by each mode	
		Manual config.			
		XGA/VGA mode			
		ARC			
		PFP Transparency			
		Reset			


SVC REMOCON

NO	KEY	FUNTION	REAMARK
1	POWER	To turn the TV on or off	
2	POWER ON	To turn the TV on automatically if the power is supplied to the TV. (Use the POWER key to deactivate): It should be deactivated when delivered.	
3	MUTE	To activate the mute function.	
4	P-CHECK	To check TV screen image easily.	Shortcut keys
5	S-CHECK	To check TV screen sound easily	Shortcut keys
6	ARC	To select size of the main screen (Normal, Spectacle, Wide or Zoom)	Shortcut keys
7	CAPTION	Switch to closed caption broadcasting	
8	TXT	To toggle on/off the teletext mode	
9	TV/AV	To select an external input for the TV screen	
10	TURBO SOUND	To start turbo sound	
11	TURBO PICTURE	To start turbo picture	
12	IN-START	To enter adjustment mode when manufacturing the TV sets. To adjust the screen voltage (automatic): In-start → mute → Adjust → AV(Enter into W/B adjustment mode) W/B adjustment (automatic): After adjusting the screen → W/B adjustment → Exit two times (Adjustment completed)	Use the AV key to enter the screen W/B adjustment mode. Use the AV key to enter the screen W/B adjustment mode.
13	ADJ	To enter into the adjustment mode. To adjust horizontal line and sub-brightness.	
14	MPX	To select the multiple sound mode (Mono, Stereo or Foreign language)	
15	EXIT	To release the adjustment mode	
16	APC(PSM)	To easily adjust the screen according to surrounding brightness	
17	ASC(SSM)	To easily adjust sound according to the program type	
18	MULTIMIDIA	To check component input	Shortcut keys
19	FRONT-AV	To check the front AV	Shortcut keys
20	CH±	To move channel up/down or to select a function displayed on the screen.	
21	VOL±	To adjust the volume or accurately control a specific function.	
22	ENTER	To set a specific function or complete setting.	
23	PIP CH-(OP1)	To move the channel down in the PIP screen. To use as a red key in the teletext mode	
24	PIP CH+(OP2)	To move the channel in the PIP screen To use as a green key in the teletext mode	
25	PIP SWAP(OP3)	To switch between the main and sub screens To use as a yellow key in the teletext mode	
26	PIP INPUT(OP4)	To select the input status in the PIP screen To use as a blue key in the teletext mode	
27	EYE	To set a function that will automatically adjust screen status to match the surrounding brightness so natural color can be displayed.	
28	MENU	To select the functions such as video, voice, function or channel.	
29	IN-STOP	To set the delivery condition status after manufacturing the TV set.	
30	STILL	To halt the main screen in the normal mode, or the sub screen at the PIP screen. Used as a hold key in the teletext mode (Page updating is stopped.)	
31	TIME	Displays the teletext time in the normal mode Enables to select the sub code in the teletext mode	
32	SIZE	Used as the size key in the PIP screen in the normal mode Used as the size key in the teletext mode	
33	MULTI PIP	Used as the index key in the teletext mode (Top index will be displayed if it is the top text.)	
34	POSITION	To select the position of the PIP screen in the normal mode Used as the update key in the teletext mode (Text will be displayed if the current page is updated.)	
35	MODE	Used as Mode in the teletext mode	
36	PIP	To select the simultaneous screen	
37	TILT	To adjust screen tilt	Shortcut keys
38	0~9	To manually select the channel.	

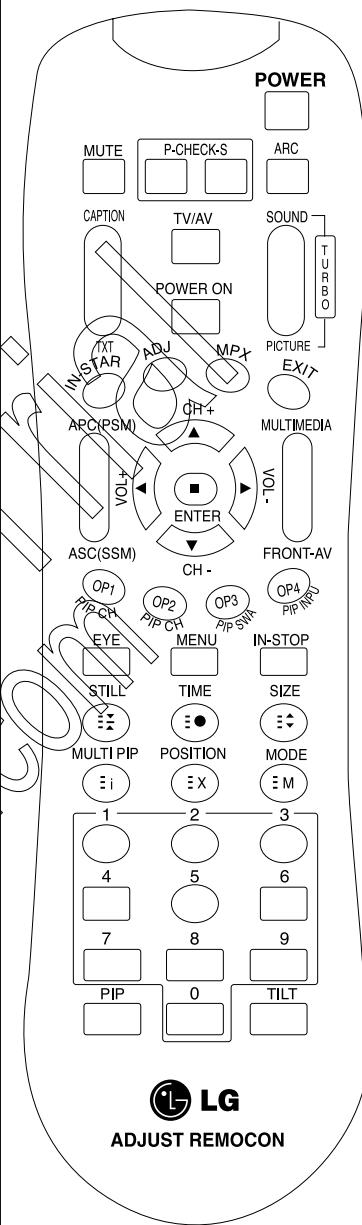

TROUBLESHOOTING

1. No power

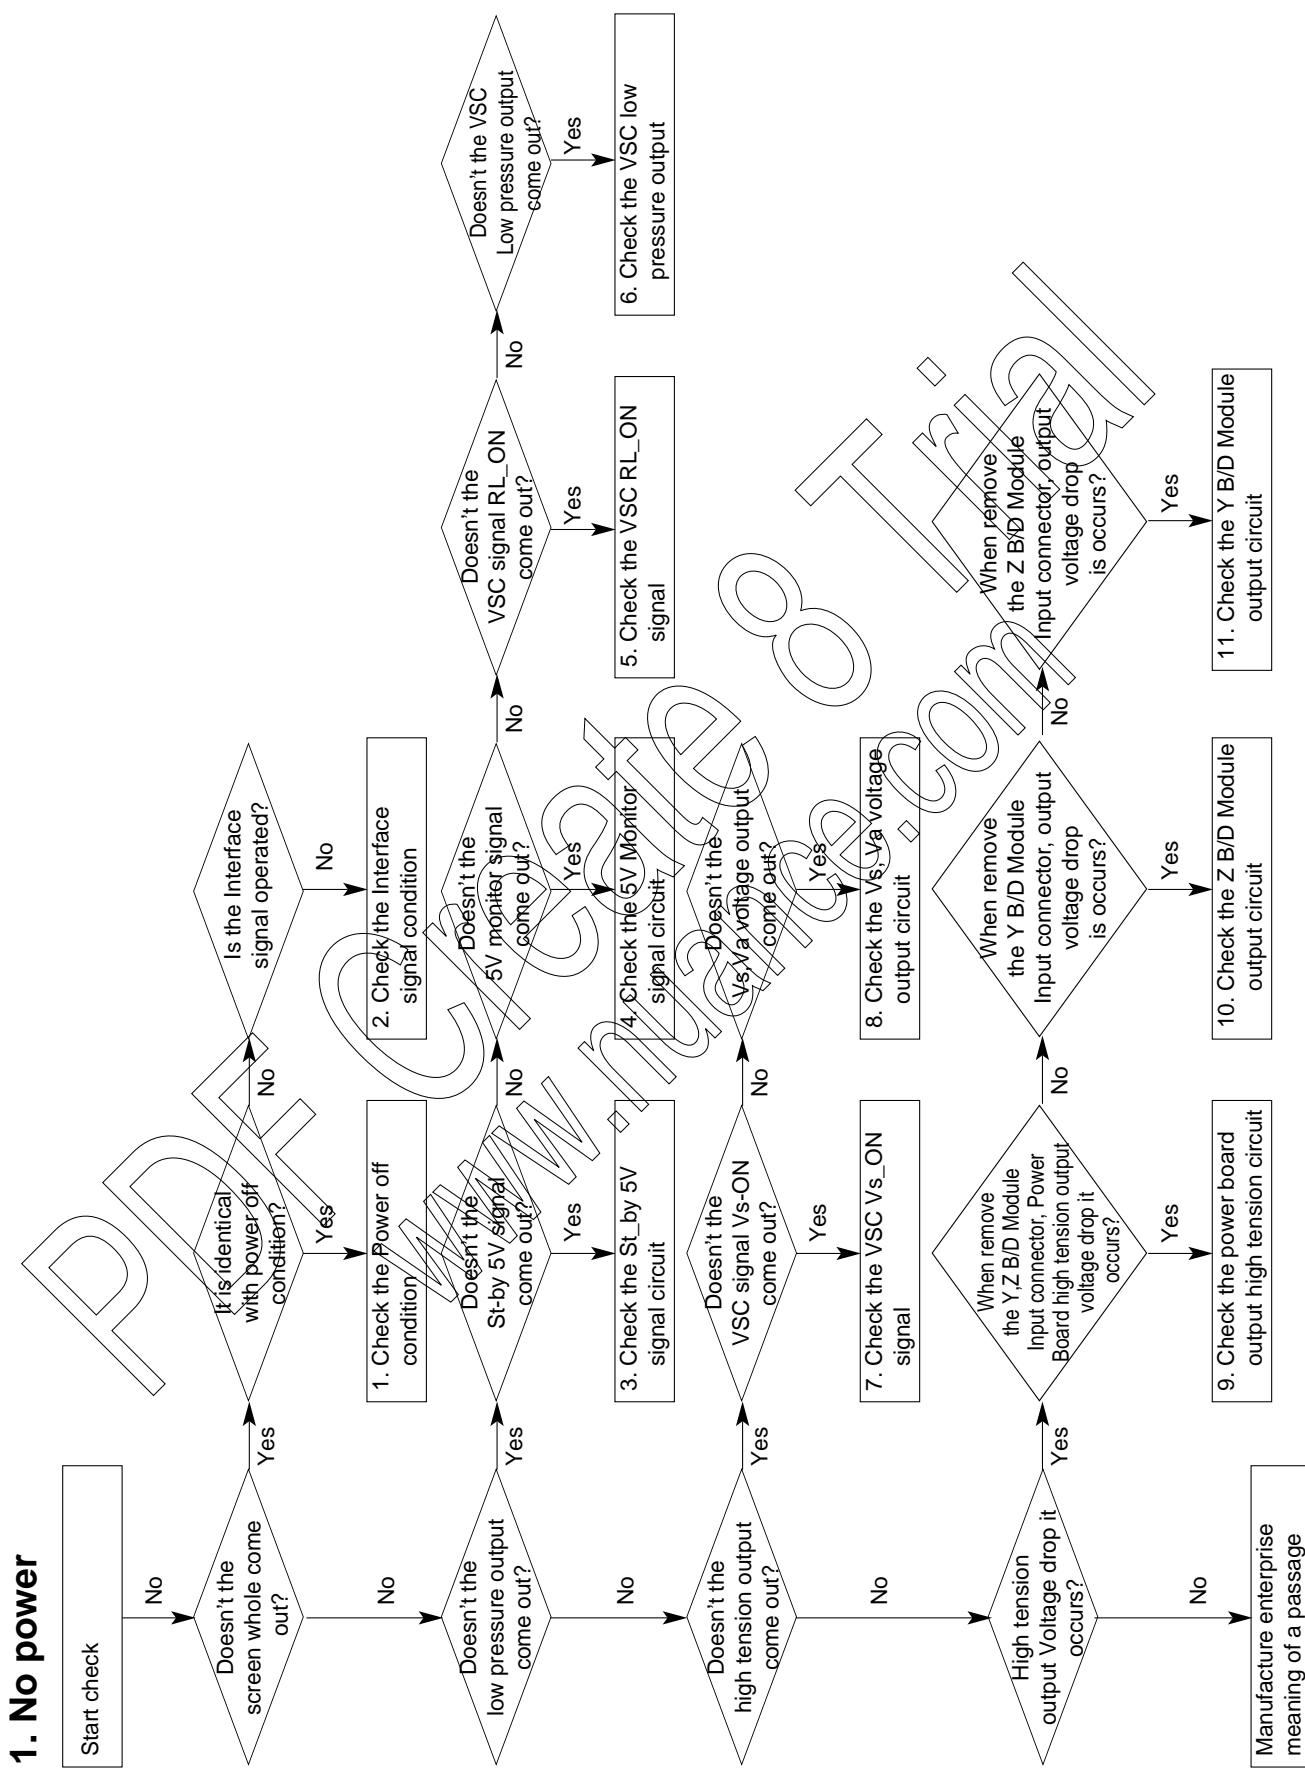



2. VSC Board

2-1. No Power

(1) Symptom

- 1) Minute discharge doesn't occur at module.
- 2) Front LED doesn't come into action

(2). Check follow

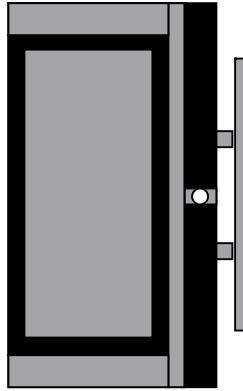
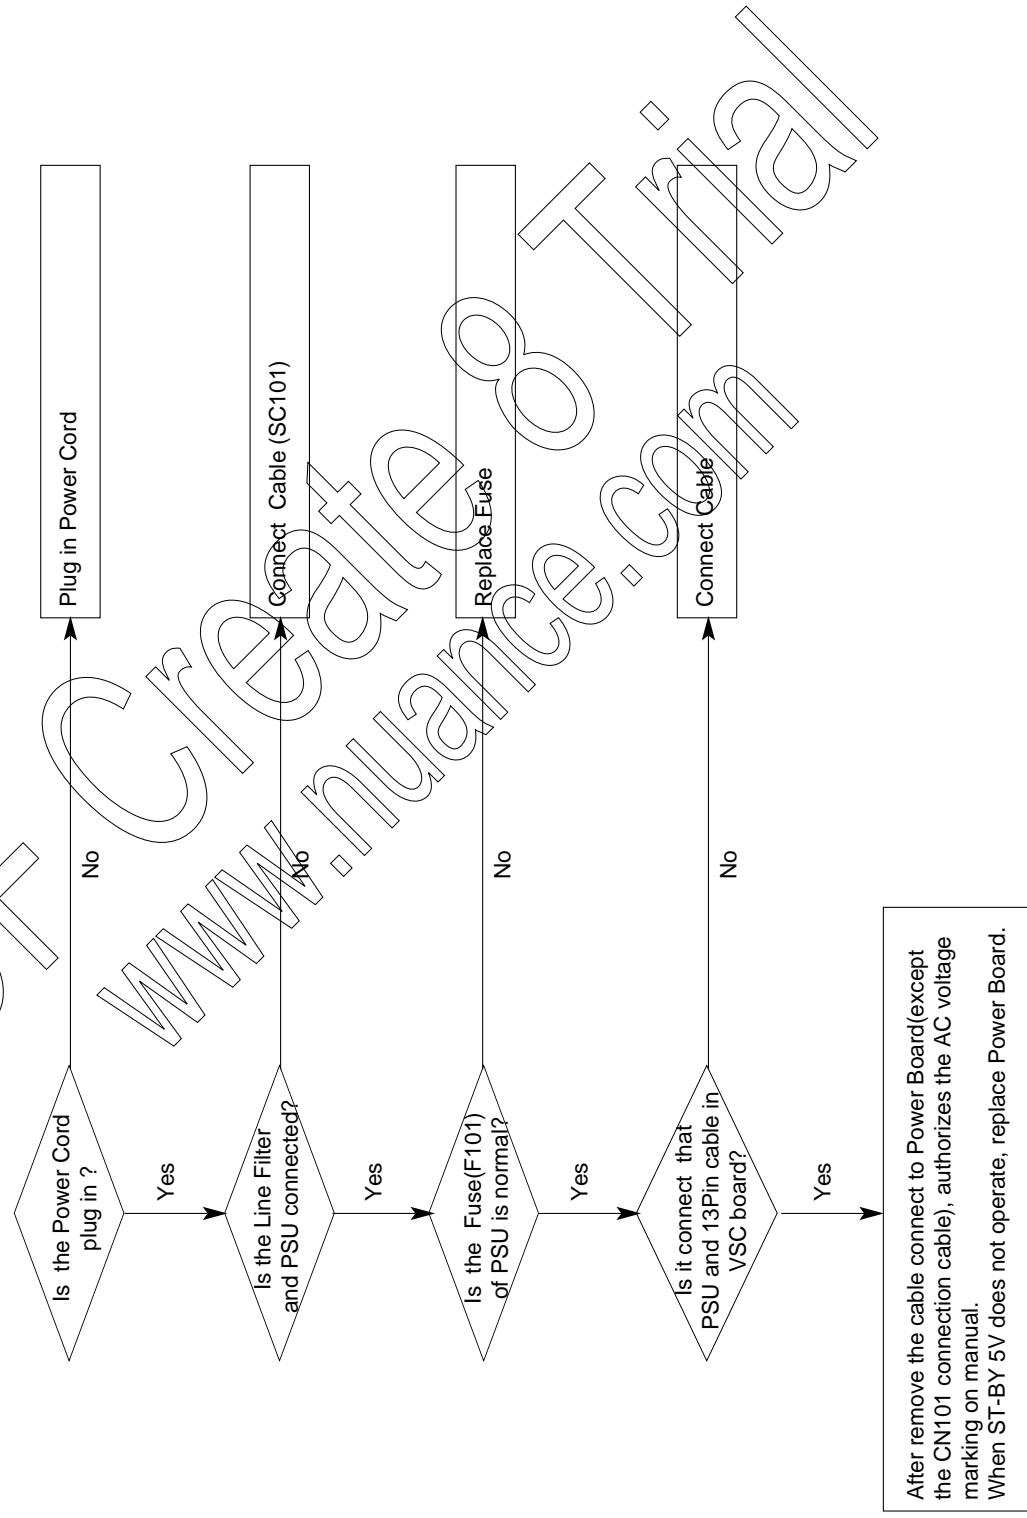



2-2. No Raster - LCD

(1) Symptom

- 1) Doesn't minute discharge at module.
 - 2) It maintains the condition where the front LED is normal.

(2) Check follow

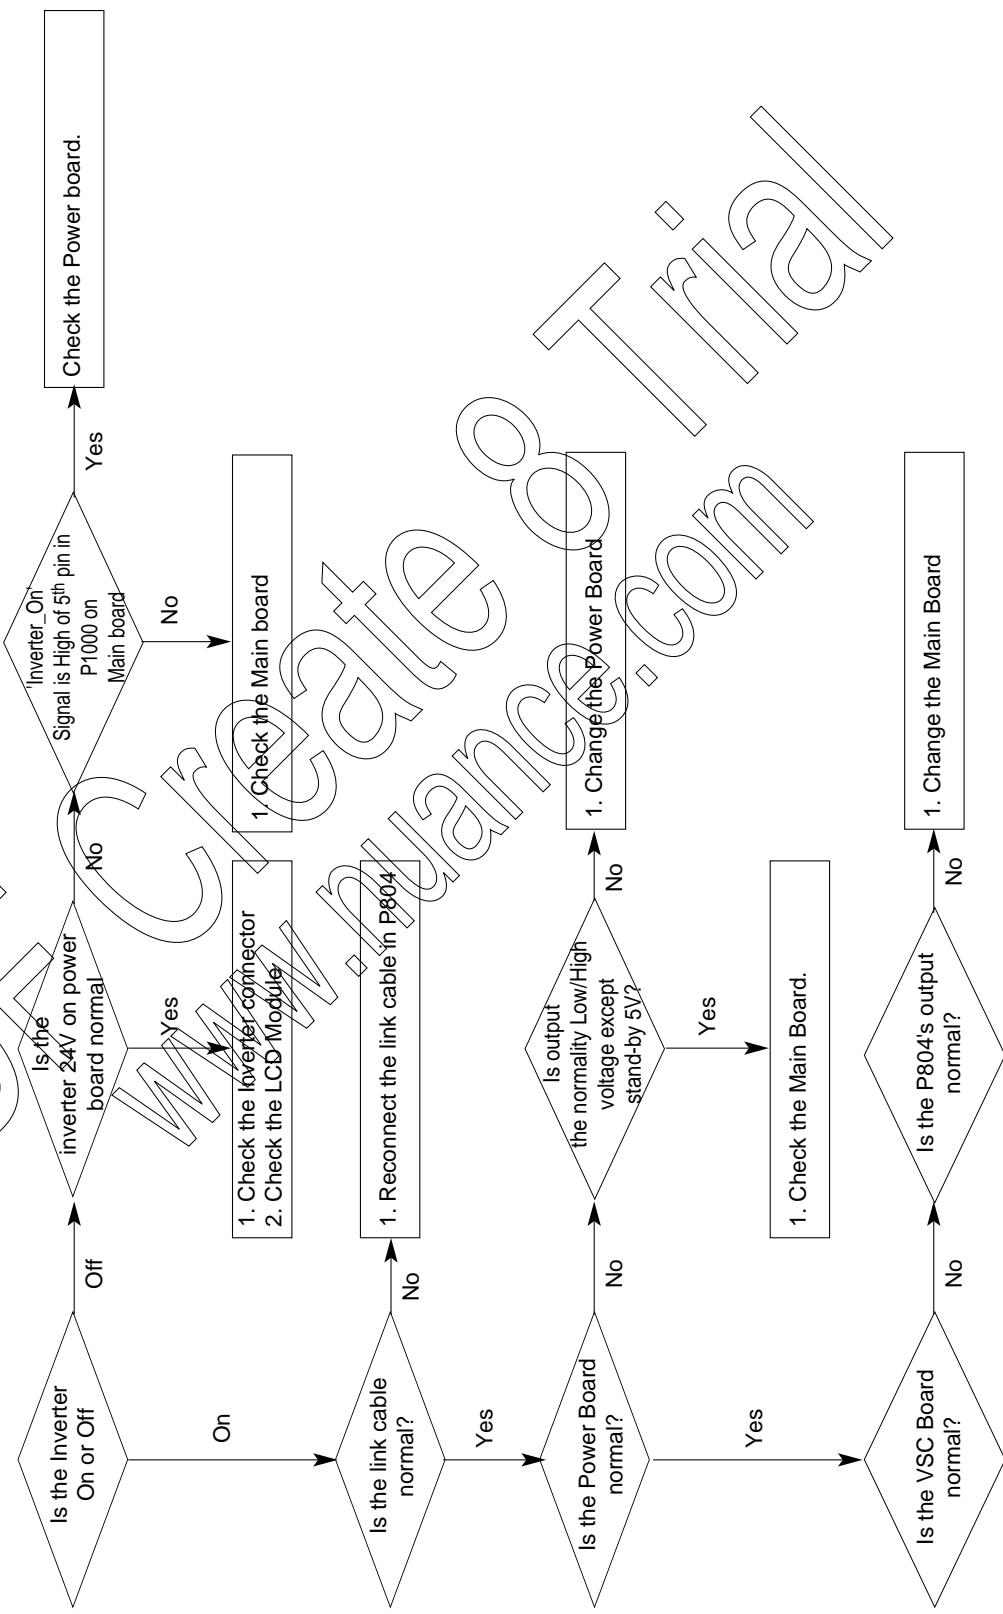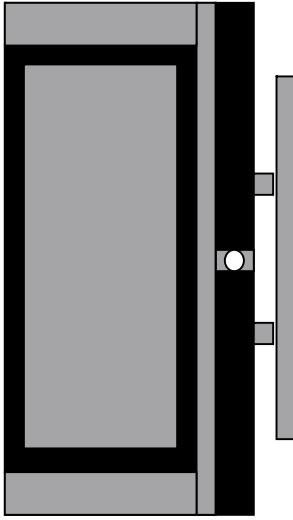

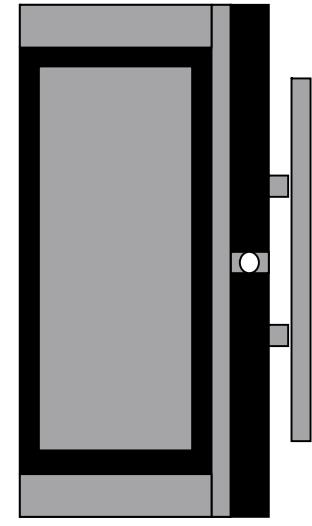


2-3. In case of occur strange screen into specific mode

2-3-1. In case of doesn't display the OSD

(1) Symptom

- 1) LED is White
- 2) The minute discharge work continuously

(2) Check follow

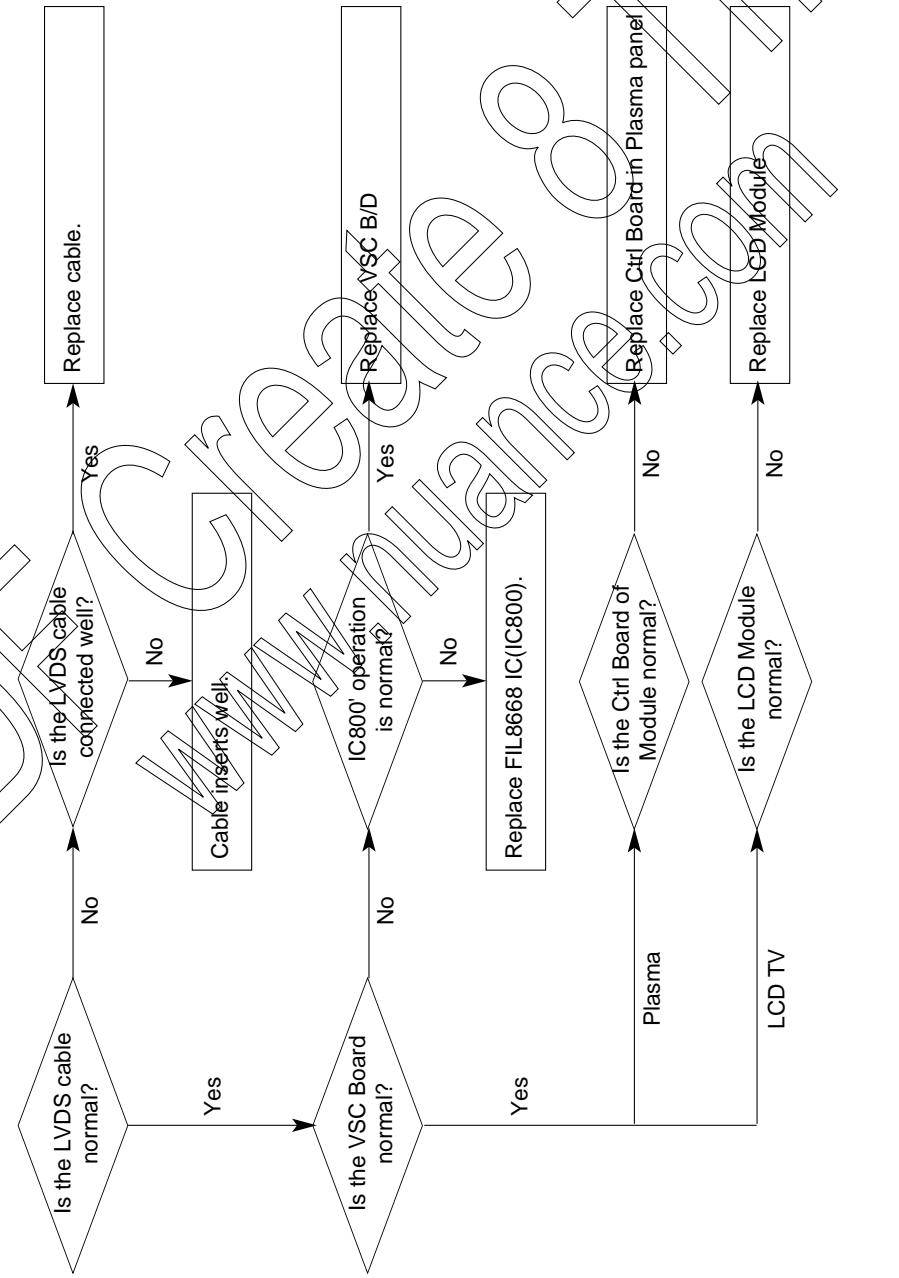

2-3-2. In the case of doesn't work normally at specific input mode




(1) Symptom

1) The screen doesn't work normally at specific input mode (RF, AV, Component, RGB, HDMI)


(2) Check follow

- 1) Check the all input model if all input display normally.
 - 2) Check the PIP and Double Window if it display normally.(Re-Check It Swap)


(3) In case of unusual situation from BE mode

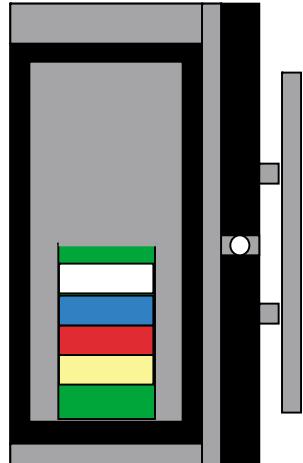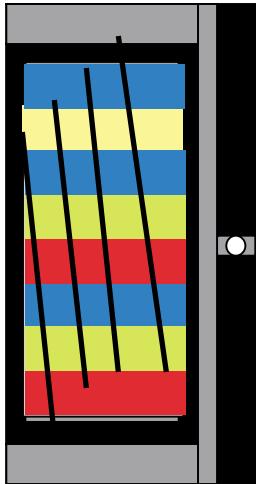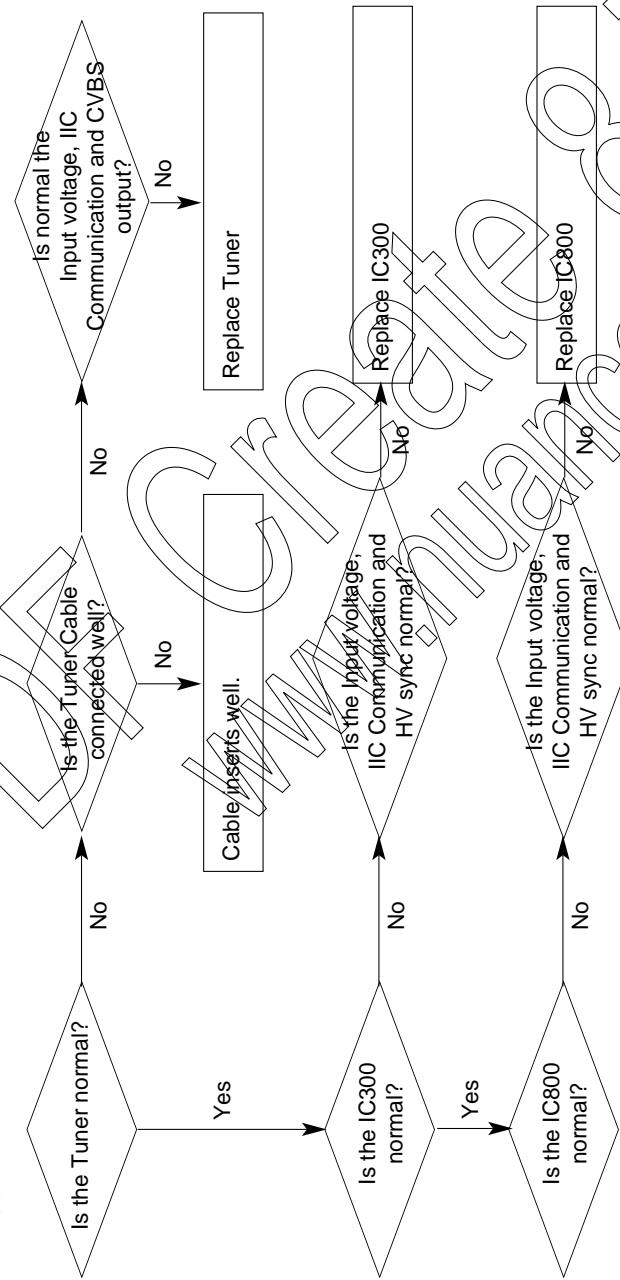


(4) When set doesn't display normally at RF , AV mode

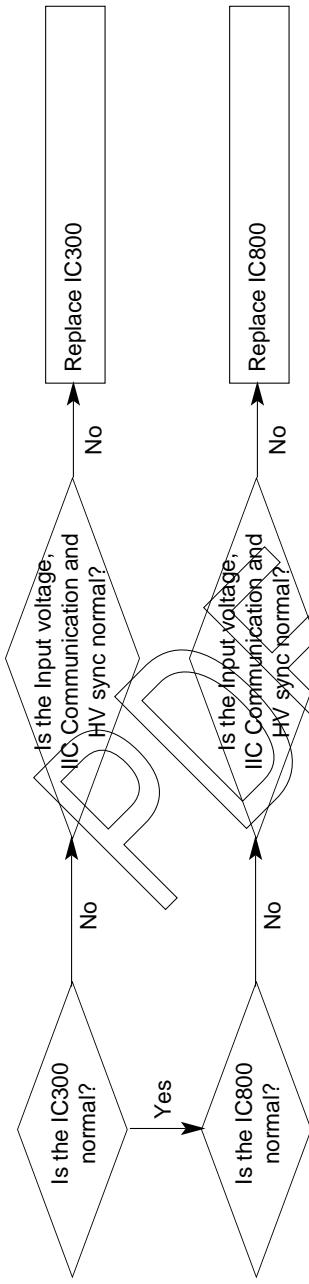

(5) When set doesn't display normally at Component, RGB mode

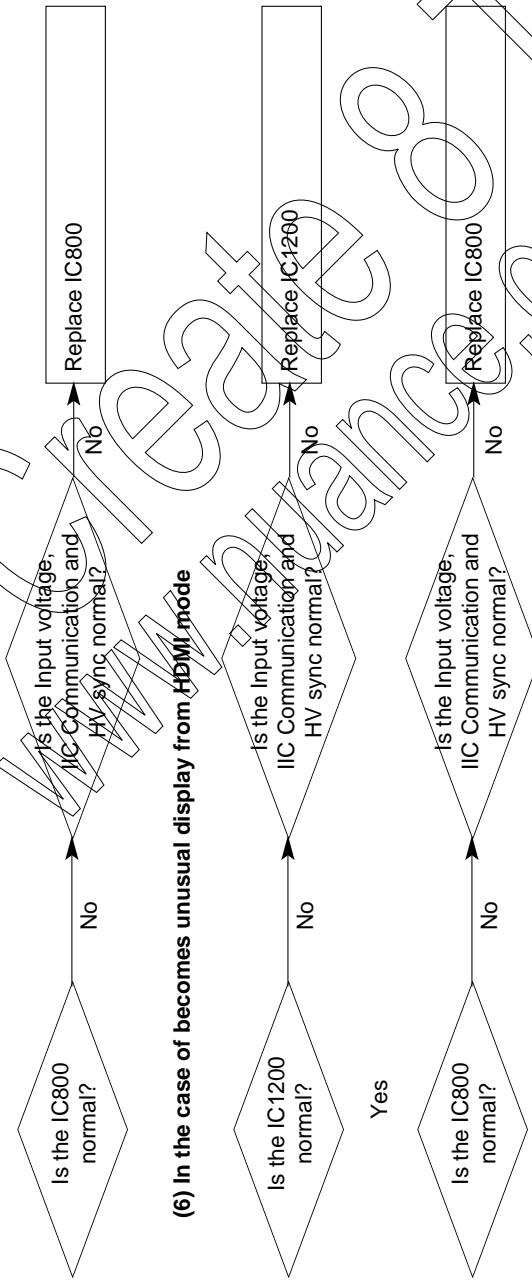


(6) In the case of becomes unusual display from HDMI mode

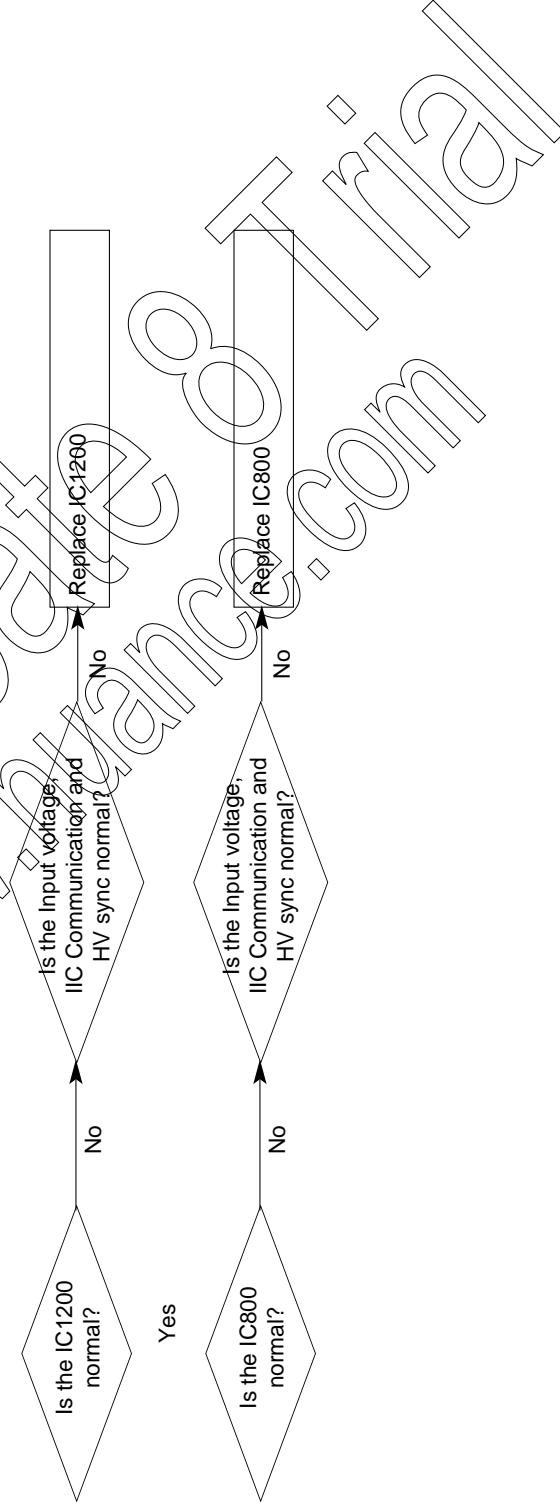


2-4. In case of no sound

- (1) Symptom
 1) LED is White
 2) Screen existent, but Sound isn't


(2) Check follow

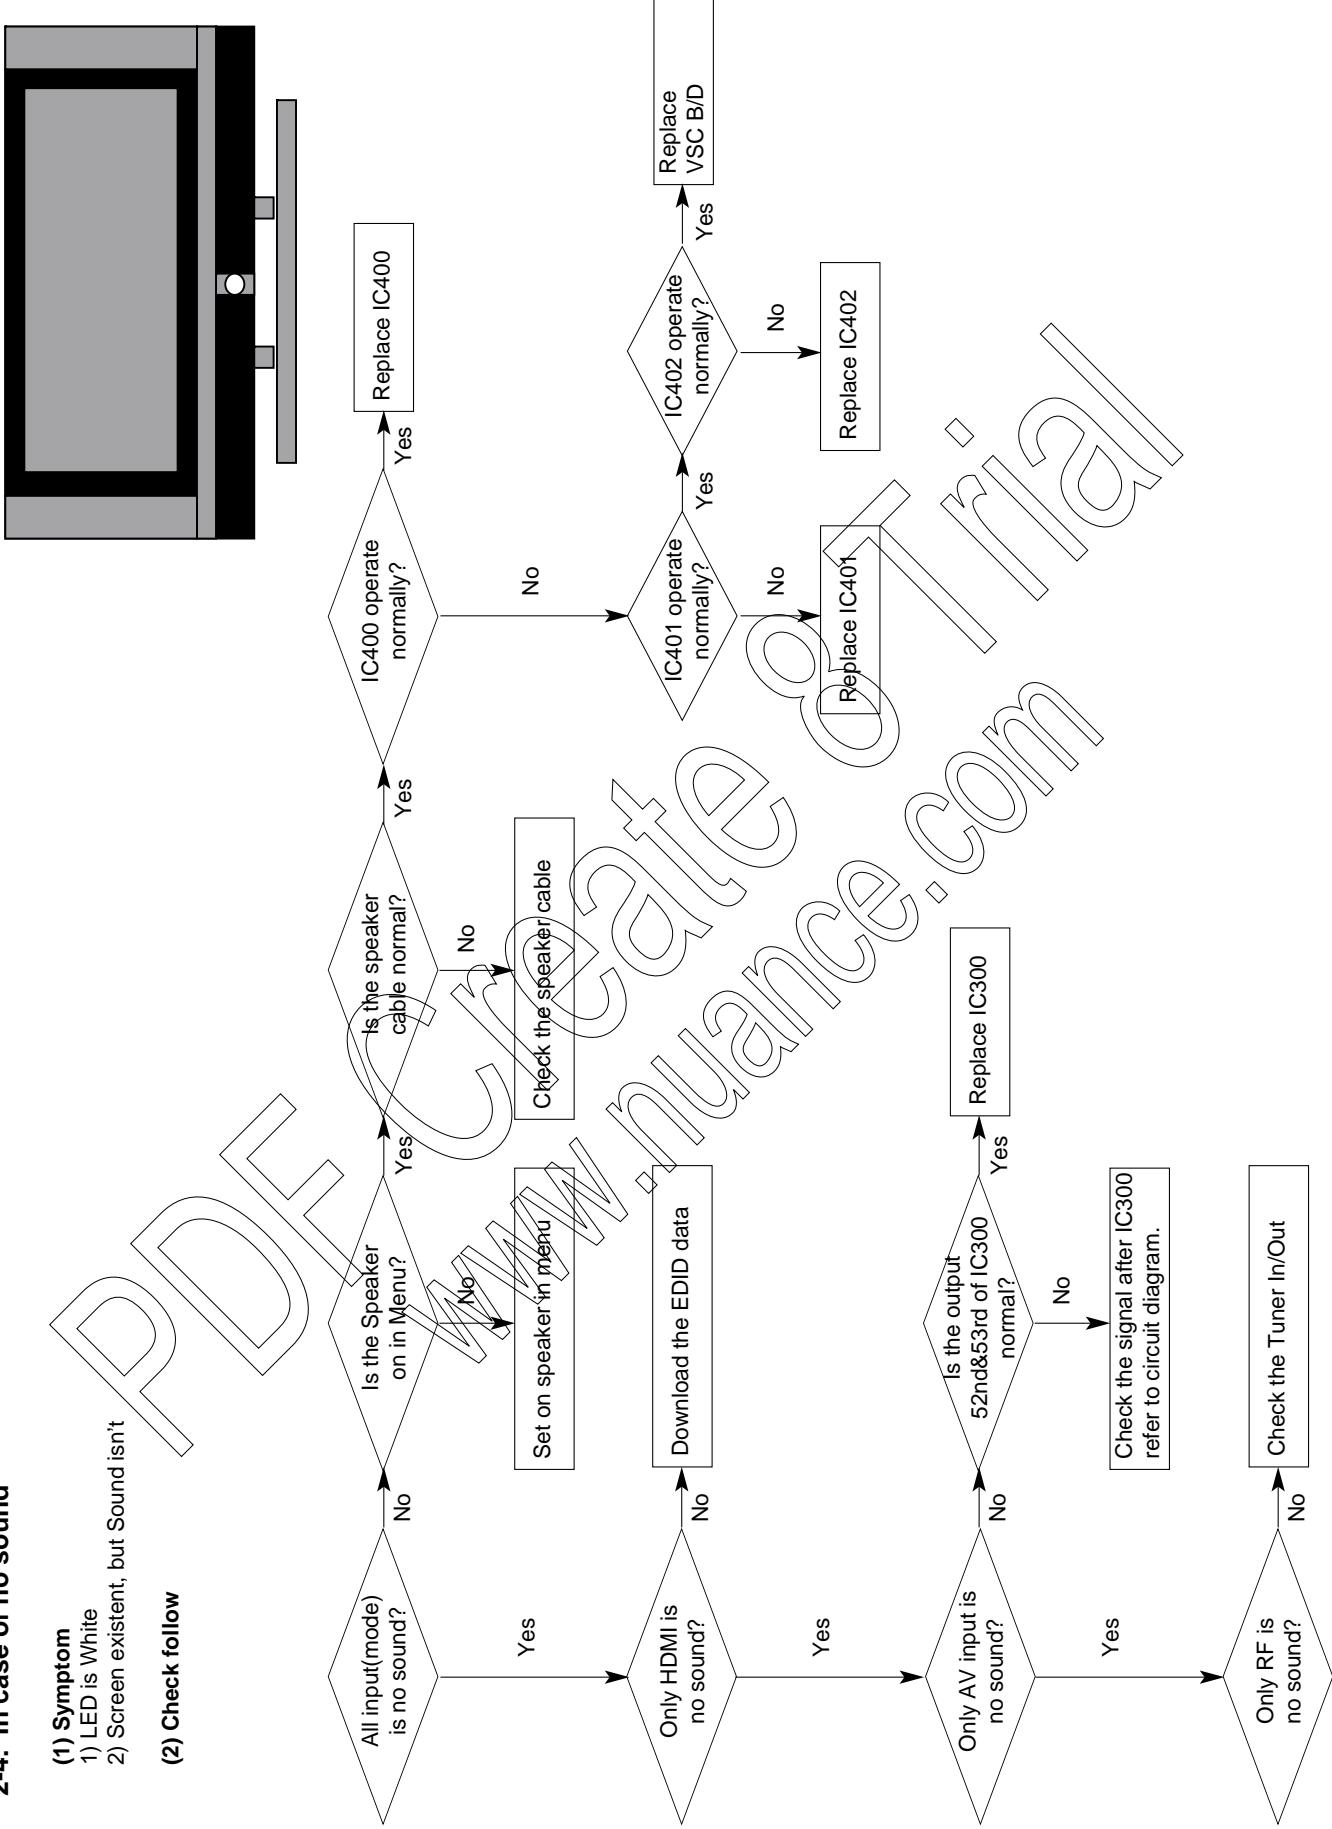

BLOCK DIAGRAM

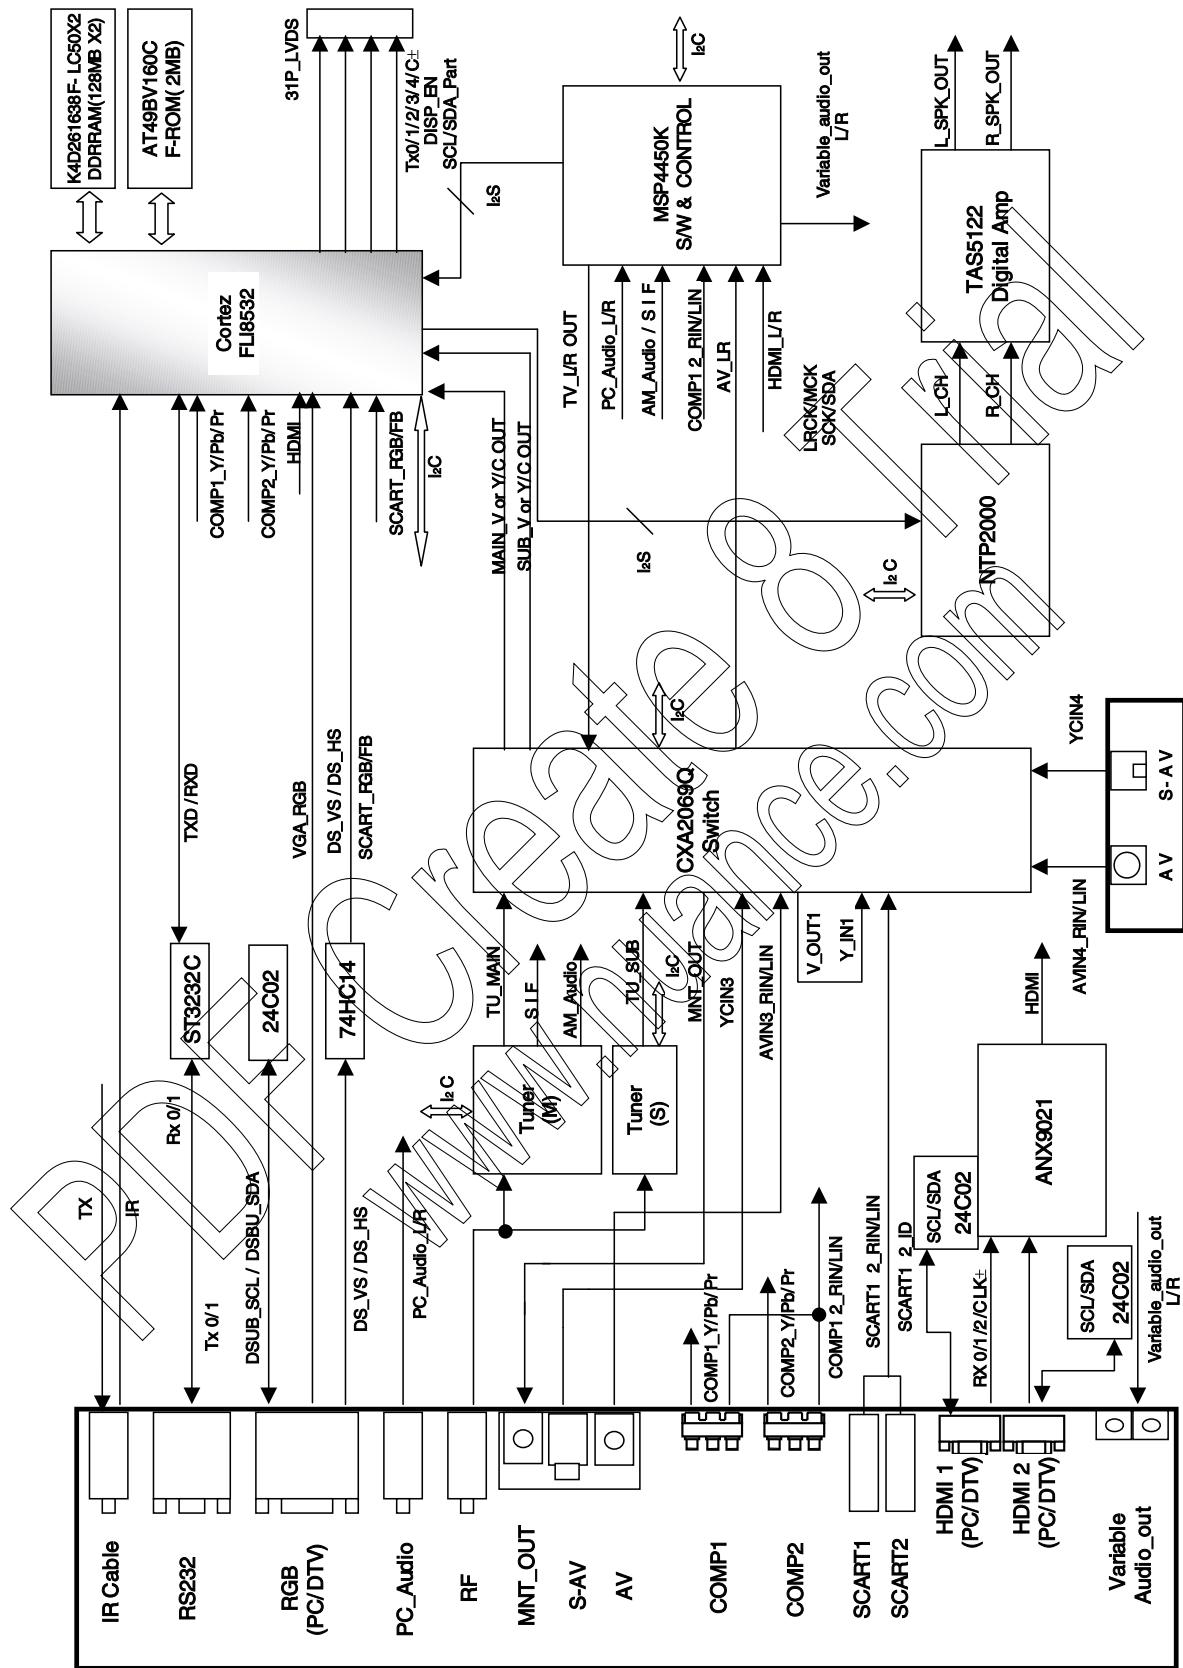


EXPLODED VIEW (37LC2R)

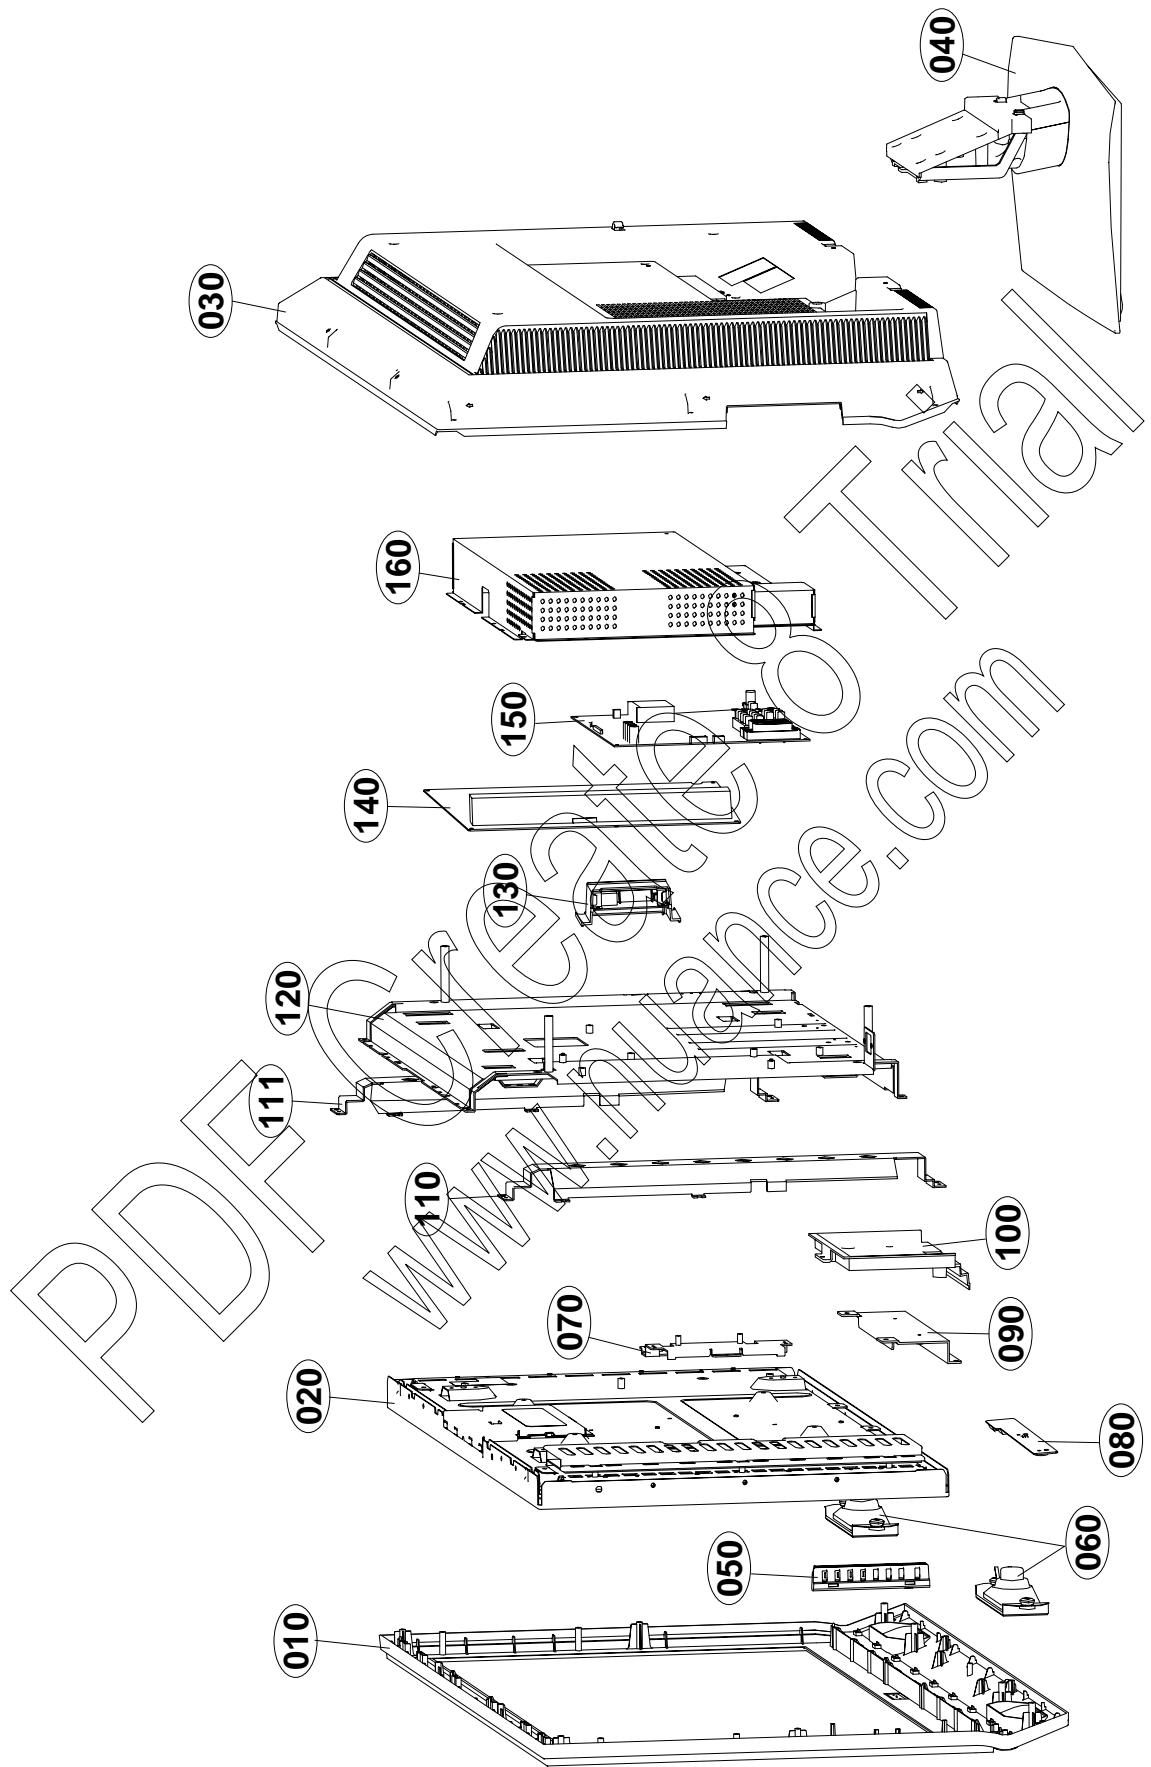

EXPLODED VIEW PARTS LIST(37LC2R)

No.	PART NO.	DESCRIPTION
010	30919E0046J	Cover Assembly, 37LC2R-ZH BRAND 30909E0027 FOR EU(C/SKD)
	30919E0046H	Cover Assembly, 37LC2R-ZH BRAND 30909E0027 FOR EU
020	6304FAU023A	LCD,Panel-TFT, T370XW01-V1 37INCH 1366X768 500CD COLOR 72% T370XW01-V1 500NITS 8MS 20LAMPS
030	3809900164F	Cover Assembly, 37LC2R-ZH NON H3-H(C/SKD)
	3809900164E	Cover Assembly, 37LC2R-ZH NON H3-H-atsula
040	3043900032B	Base Assembly, 37LC2D-UD 35509K0214 FOR WORLDWIDE, BODY ASSY(C/SKD)
	3043900032E	Base Assembly, 37LC2D-EC 35509K0214 FOR NON USA, BASE ASSY(C/SKD)
	3043900032C	Base Assembly, 37LC2D-ND 35509K0214 FOR KOREA
050	68719ST997B	PCB Assembly,Sub, SUB T.T LP62A 37LC2R-ZH ALEULFX LOCAL KEY
060	6400WMCX03A	Speaker,Woofer, G1560102 ND35 15W 8QHM 82DB 100HZ 193X57mM LUG
070	4814V00520B	Plate, PRESS SPTE T0.5 PLATE RT-42PX40 SHIELD TUNER BOTTOM AP03NC SUS PRESS
080	68719ST105A	PCB Assembly,Sub, SUB T.T LP62A/37LC2R-ZH ALEULFX PREAMP + LED LC
090	49509K0222A	Plate, PRESS SBHG T2.0 SUPPORT STAND 37LC2
100	35509K0217A	Cover, MOLD HIPS 37LC2 STAND MID INNER
110	49509K0341C	Plate, PRESS EGI 1.6 SUPPORTER SPC AUO SIDE FRAME (RIGHT, C/SKD)
	49509K0340D	Plate, PRESS EGI 1.6 SUPPORTER SPC 37LC2R(AUO)
	49509K0341E	Plate, PRESS EGI 1.6 SUPPORTER SPC AUO-SKD , For Thailand, Vietnam
111	49509K0340C	Plate, PRESS EGI 1.6 SUPPORTER SPC SIDE FRAME(AUO , LEFT, C/SKD)
	49509K0341D	Plate, PRESS EGI 1.6 SUPPORTER SPC 37LC2R(AUO),LEFT
	49509K0340E	Plate, PRESS EGI 1.6 SUPPORTER SPC SIDE FRAME(AUO , LEFT, C/SKD)-For Thailand, Vietnam
120	4950TKA361M	Plate, FRAME, MAIN 37LC2R(C/SKD)
	4950TKA361L	Plate, FRAME, MAIN 37LC2R-atsula
130	68719STA69A	PCB Assembly,Sub, SUB T.T LP62C 37LC2R-TH AURDLFX SIDE A/V 37LC TH
140	6709900016D	SMPS,AC/DC, LG LP2637HEP 90.0VTO264.0V 215W 47TO63HZ UL/CSA/SEMKO YY / AT / HE
150	33139L3049A	Main Total Assembly, 37LC2R-TH BRAND LP62A- C/SKD
	33139L3022B	Main Total Assembly, 32LC2R-TH AUO BRAND LP62A
160	4950TKA362N	Plate, SHIELD, MAIN PLUS ANALOG AV(37LC2R-TH), C/SKD
	4950TKA362M	Plate, SHIELD, MAIN PLUS ANALOG AV(37LC2R-TH)

EXPLODED VIEW(42LC2R)

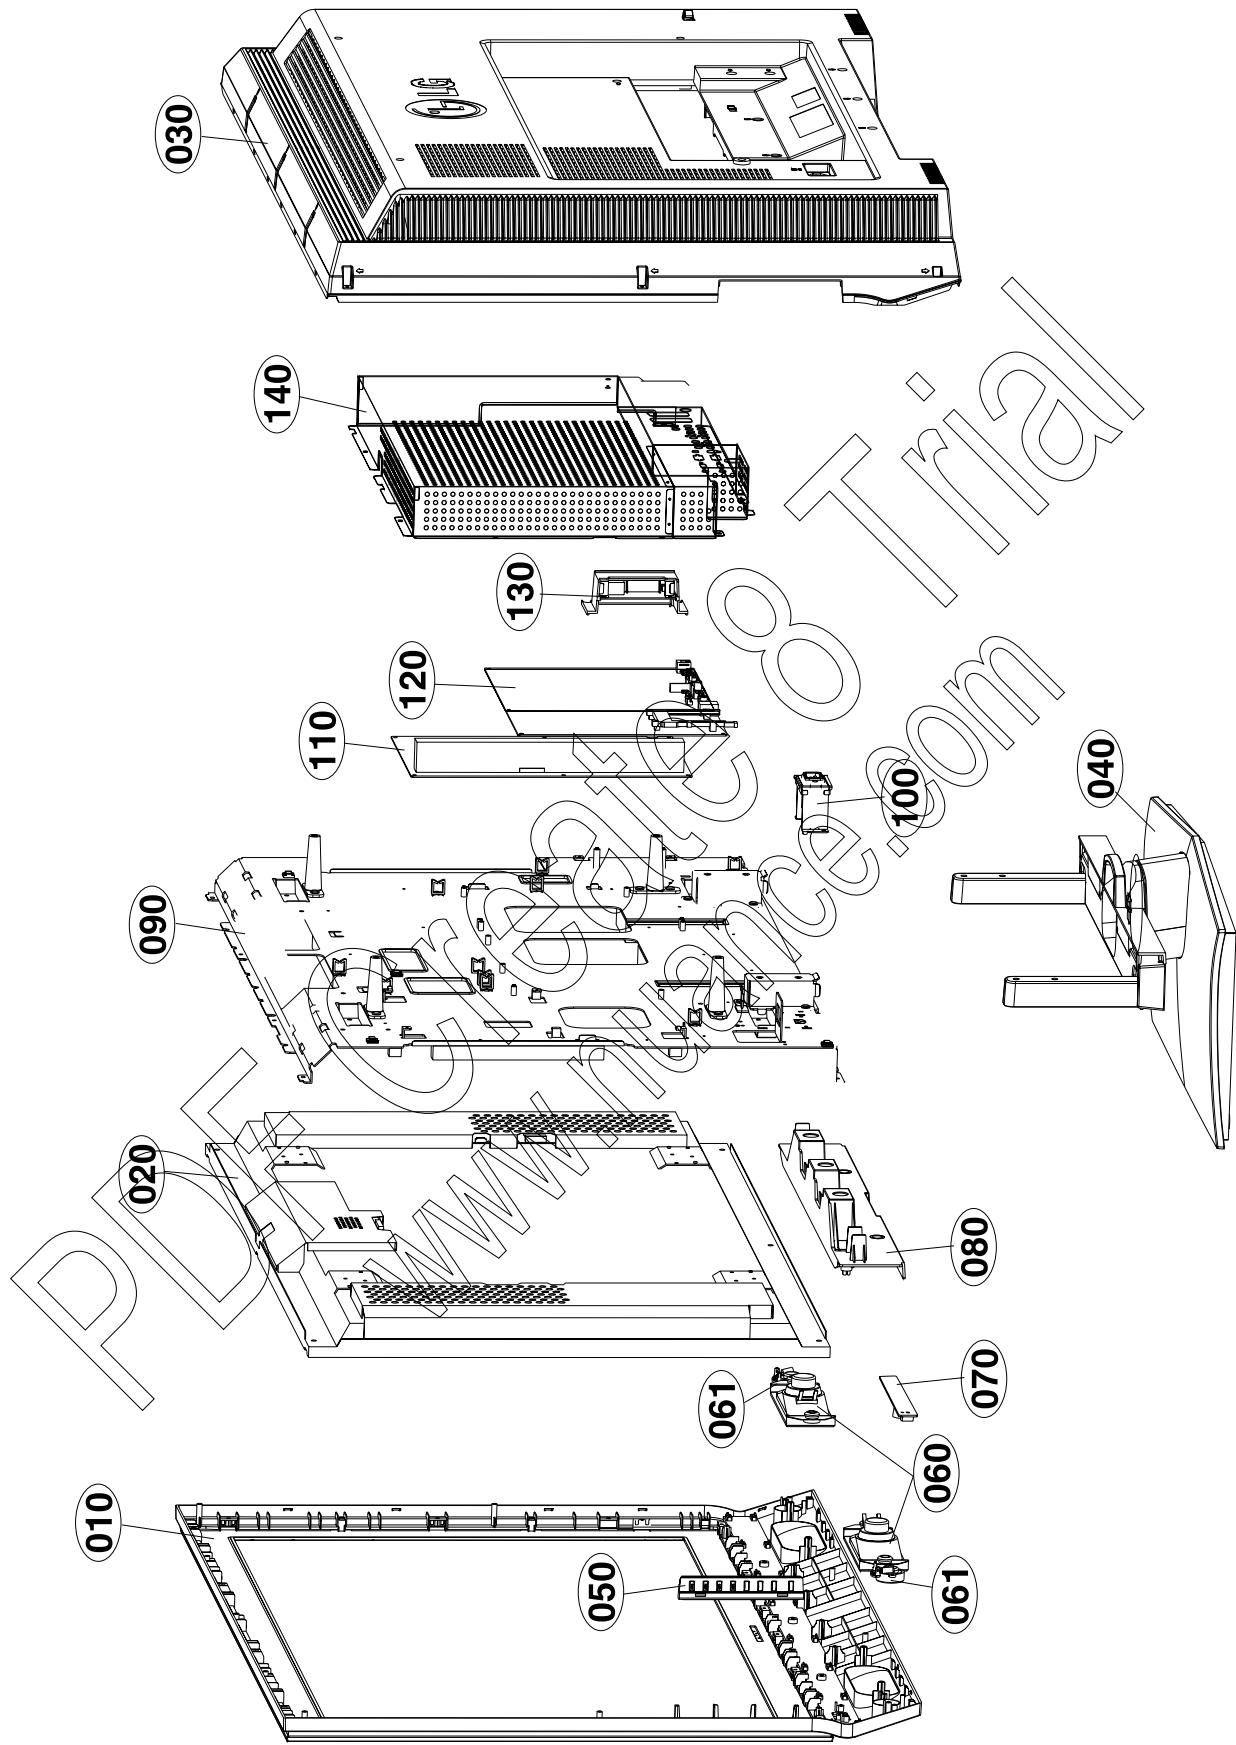

EXPLODED VIEW PARTS LIST(42LC2R)

No.	PART NO.	DESCRIPTION
010	⚠ 30919E0047H	Cover Assembly, 42LC2R BRAND 30909E0028 ZH C/SKD
020	⚠ 6304FLP363A	LCD,Panel-TFT, LC420W02-SLA1 42INCH 1365X768 500CD COLOR 72% -
	or 6304FLP353A	LCD,Panel-TFT, LC420W02-B6K2 42INCH 1365X768 500CD COLOR 72% -
030	⚠ 3809900165L	Cover Assembly, 42LC2R HURRICANE 42" SPRAY
040	⚠ 3043900034C	Base Assembly, 42LC2 42LC2 FOR USA C/SKD
050	68719ST997B	PCB Assembly,Sub, SUB T.T LP62A 37LC2R-ZH ALEULFX LOCAL KEY
	68719ST997C	PCB Assembly, SUB T.T LP62A 37LC2R-ZH ALEULFX LOCAL KEY NT CKD
060	6400WMCX03A	Speaker,Woofe, G1560102 ND35 15W 8OHM 82DB 100HZ 193X57mM LUG
061	6400DTTX02A	Speaker,Tweeter, EN15D-6629 TOPTONE TWEETER(DOME) 80HM 15/20W 78DB OTHERS LC2 MODEL
070	68719ST105A	PCB Assembly,Sub, SUB T.T LP62A 37LC2R-ZH ALEULFX PREAMP + LED LC
	68719ST105C	PCB Assembly, SUB T.T LP62A 37LC2R-ZH ALEULFX PREAMP + LED LC NT CKD
080	35519K0030D	Cover Assembly, 42LC2 STAND 35509K0220B SUPPORT C/SKD
090	49519S0036F	Plate Assembly, FRAME MAIN 42LC2R-ZH C/SKD
100	31419SNJ81A	Chassis Assembly, SUB LA51D AC INLET ASSY
110	⚠ 6709900017B	SMPS,AC/DC, YP4201 90.0VTO264.0V 280W 47TO63HZ UL/CSA/TUV/SEMKO 42" LCD
120	⚠ 33139L3050A	Main Total Assembly, 42LC2R-TH BRAND LP62A
	33139L3050C	Main Total Assembly, 42LC2R-TH BRAND LP62A NT CKD
130	68719STA68A	PCB Assembly,Sub, SUB T.T LP62C 42LC2R-TH AURDLFX SIDE A/V FOR 42LC TH
	68719STA68C	PCB Assembly, SUB T.T LP62C 42LC2R-TH AURDLFX SIDE A/V FOR 42LC TH NT CKD
140	49509K0173H	Plate SHIELD MAIN ANALOG 42LC2R-TH C/SKD

REPLACEMENT PARTS LIST

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;

CC, CX, CK, CN, CH : Ceramic
CQ : Polyester
CE : Electrolytic
CF : Fixed Film

RD : Carbon Film
RS : Metal Oxide Film
RN : Metal Film
RH : CHIP, Metal Glazed(Chip)
RR : Drawing

*S	*AL	LOC. NO.	PART NO.	DATE: 2006. 04. 05.						
				DESCRIPTION / SPECIFICATION						
MAIN BOARD										
CAPACITOR										
		C1001	OCE477WF6DC	MVK10TP16VC470M 47uF 20% 1						
		C1005	OCE477WF6DC	MVK10TP16VC470M 47uF 20% 1						
		C1007	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1009	OCE477WF6DC	MVK10TP16VC470M 47uF 20% 1						
		C1012	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1014	OCE477WF6DC	MVK10TP16VC470M 47uF 20% 1						
		C1016	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1019	OCE477WF6DC	MVK10TP16VC470M 47uF 20% 1						
		C1020	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1022	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1023	OCE477WF6DC	MVK10TP16VC470M 47uF 20% 1						
		C1048	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1049	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1050	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1051	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1053	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1054	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1062	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1063	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1064	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1065	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1067	OCE477WF6DC	MVK10TP16VC470M 47uF 20% 1						
		C1069	OCE477WF6DC	MVK10TP16VC470M 47uF 20% 1						
		C1070	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1072	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1084	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1085	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1086	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1087	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1088	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1089	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1092	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1101	OCE477WF6DC	MVK10TP16VC470M 47uF 20% 1						
		C1107	OCE477WF6DC	MVK10TP16VC470M 47uF 20% 1						
		C1109	OCE477WF6DC	MVK10TP16VC470M 47uF 20% 1						
		C1110	OCE227WF6DC	MVK8.0TP16VC220M 220uF 20%						
		C1111	OCE477WF6DC	MVK10TP16VC470M 47uF 20% 1						
		C1113	OCE227WF6DC	MVK8.0TP16VC220M 220uF 20%						
		C1128	OCE477WF6DC	MVK10TP16VC470M 47uF 20% 1						
		C1129	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1130	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1131	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1132	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1133	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1135	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1137	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1146	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1147	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1148	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1149	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1151	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						
		C1152	OCE107WF6DC	MVK6.3TP16VC100M 100uF 20%						

*S	*AL	LOC. NO.	PART NO.	DATE: 2006. 04. 05.						
				DESCRIPTION / SPECIFICATION						
MAIN BOARD										
CAPACITOR										
		C1157	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1158	OCE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16						
		C1207	OCE476SF6DC	MV476M016S0ANC010 47uF 20%						
		C1222	OCE106SH6DC	MVM106M025S0ANB010 10uF 20%						
		C1226	OCE106SH6DC	MVM106M025S0ANB010 10uF 20%						
		C1244	OCE106SH6DC	MVM106M025S0ANB010 10uF 20%						
		C1403	OCH8106J691	MVK5.0TP35VC10M 10uF 20% 35						
		C1460	OCE106SH6DC	MVM106M025S0ANB010 10uF 20%						
		C1468	OCE106SH6DC	MVM106M025S0ANB010 10uF 20%						
		C148	OCE227SF6DC	MVG6.3TP16VC220M 220uF 20%						
		C149	OCE227SF6DC	MVG6.3TP16VC220M 220uF 20%						
		C174	OCE106SH6DC	MVM106M025S0ANB010 10uF 20%						
		C175	OCE106SH6DC	MVM106M025S0ANB010 10uF 20%						
		C1814	OCE226SF6DC	MVM226M016S0ANB010 22uF 20%						
		C1826	OCE476SF6DC	MVM476M016S0ANC010 47uF 20%						
		C211	OCE477SF6DC	MVM477M016S0ANG030 470uF 20						
		C213	OCE477SF6DC	MVM477M016S0ANG030 470uF 20						
		C215	OCE106SH6DC	MVM106M025S0ANB010 10uF 20%						
		C224	OCE477SF6DC	MVM477M016S0ANG030 470uF 20						
		C227	OCE107SF6DC	MVM107M016S0ANE010 100uF 20						
		C238	OCE227SF6DC	MVG6.3TP16VC220M 220uF 20%						
		C314	OCE107SF6DC	MVM107M016S0ANE010 100uF 20						
		C316	OCE226SF6DC	MVM226M016S0ANB010 22uF 20%						
		C317	OCE107SF6DC	MVM107M016S0ANE010 100uF 20						
		C318	OCE476SF6DC	MVM476M016S0ANC010 47uF 20%						
		C349	OCE476SF6DC	MVM476M016S0ANC010 47uF 20%						
		C351	OCE105SK6DC	MVM105M050S0ANB010 1uF 20%						
		C354	OCE105SK6DC	MVM105M050S0ANB010 1uF 20%						
		C401	OCE476SF6DC	MVM476M016S0ANC010 47uF 20%						
		C405	OCE107SF6DC	MVM107M016S0ANE010 100uF 20						
		C409	OCE226SF6DC	MVM226M016S0ANB010 22uF 20%						
		C412	OCE335SK6DC	MVM335M050S0ANB010 3.3uF 20						
		C432	OCE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16						
		C446	OCE335SK6DC	MVM335M050S0ANB010 3.3uF 20						
		C451	OCE106SH6DC	MVM106M025S0ANB010 10uF 20%						
		C452	OCE106SH6DC	MVM106M025S0ANB010 10uF 20%						
		C463	OCE475SK6DC	MVM475M050S0ANB010 4.7uF 20						
		C464	OCE475SK6DC	MVM475M050S0ANB010 4.7uF 20						
		C466	OCE475SK6DC	MVM475M050S0ANB010 4.7uF 20						
		C467	OCE475SK6DC	MVM475M050S0ANB010 4.7uF 20						
		C512	OCE476SF6DC	MVM476M016S0ANC010 47uF 20%						
		C611	OCE107SF6DC	MVM107M016S0ANE010 100uF 20						
		C834	OCE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16						
		C835	OCE226SF6DC	MVM226M016S0ANB010 22uF 20%						
		C836	OCE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16						
		C837	OCE226SF6DC	MVM226M016S0ANB010 22uF 20%						
		C838	OCE226SF6DC	MVM226M016S0ANB010 22uF 20%						
		C839	OCE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16						
		C840	OCE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16						
		C841	OCE226SF6DC	MVM226M016S0ANB010 22uF 20%						
		C842	OCE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16						
		C853	OCE226SF6DC	MVM226M016S0ANB010 22uF 20%						
		C855	OCE226SF6DC	MVM226M016S0ANB010 22uF 20%						
		C886	OCE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16						

DATE: 2006. 04. 05.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C898	OCE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16
		C901	OCE226SF6DC	VMV226M016S0ANB010 22uF 20%
		C904	OCE226SF6DC	VMV226M016S0ANB010 22uF 20%
		C905	OCE226SF6DC	VMV226M016S0ANB010 22uF 20%
		C930	OCE226SF6DC	VMV226M016S0ANB010 22uF 20%
		C943	OCE226SF6DC	VMV226M016S0ANB010 22uF 20%
		C950	OCE226SF6DC	VMV226M016S0ANB010 22uF 20%
		C1813	OCE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16
		C1031	OCE476WK6DC	MVK8.0TP50VC47M 47uF 20% 50
		C210	OCE477SF6DC	VMV477M016S0ANG030 470uF 20
		C237	OCE227SF6DC	MVG6.3TP16VC220M 220uF 20%
		C1108	OCE477EK618	KMG5.0TP50VB470M 470uF 20%
		C1112	OCE477EK618	KMG5.0TP50VB470M 470uF 20%
		C1428	OCE477EK618	KMG5.0TP50VB470M 470uF 20%
		C1446	OCE477EK618	KMG5.0TP50VB470M 470uF 20%
		C1003	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C1026	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1029	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1033	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1034	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C1036	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1037	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1041	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C1071	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1117	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1118	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1126	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C1127	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C1223	OCC180CK41A	C1608C0G1H180JT 18pF 5% 50V
		C1224	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C1225	OCC180CK41A	C1608C0G1H180JT 18pF 5% 50V
		C1228	OCK103CK51A	0603B103K500CT 10nF 10% 50V
		C1405	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1419	OCK333CK56A	C1608X7R1H333KT 33nf 10% 50
		C1420	OCK333CK56A	C1608X7R1H333KT 33nf 10% 50
		C1421	OCK333CK56A	C1608X7R1H333KT 33nf 10% 50
		C1422	OCK333CK56A	C1608X7R1H333KT 33nf 10% 50
		C1455	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1456	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1457	OCK105DF64A	0805F105Z160CT 1uF -20TO+80
		C1458	OCK105DF64A	0805F105Z160CT 1uF -20TO+80
		C1459	OCK102CK56A	0603B102K500CT 1nF 10% 50V
		C1474	OCC102CK41A	C1608C0G1H102JT 1nF 5% 50V
		C1811	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1851	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C234	OCC271CK41A	C1608C0G1H271JT 270pF 5% 50
		C312	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C313	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C319	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C321	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C322	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C326	OCK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 1
		C327	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C328	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C329	OCK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 1
		C330	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C331	OCK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 1
		C332	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C333	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C334	OCK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 1
		C335	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C336	OCK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 1

DATE: 2006. 04. 05.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C337	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C338	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C339	OCK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 1
		C340	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C341	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C342	OCK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 1
		C343	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C344	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C345	OCK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 1
		C346	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C347	OCK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 1
		C355	OCK821CK56A	C1608X7R1H821KT 820pF 10% 5
		C357	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C402	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C403	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C411	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C414	OCC560CK41A	C1608C0G1H560JT 56pF 5% 50V
		C416	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C428	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C429	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C430	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C431	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C433	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C435	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C438	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C439	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C441	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C442	OCK474CH94A	0603F474Z250CT 470nF -20TO+
		C457	OCK682CK51A	C1608Y5P1H682KT 6.8nF 10% 5
		C458	OCK682CK51A	C1608Y5P1H682KT 6.8nF 10% 5
		C459	OCK682CK51A	C1608Y5P1H682KT 6.8nF 10% 5
		C462	OCK682CK51A	C1608Y5P1H682KT 6.8nF 10% 5
		C494	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C511	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C605	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C606	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C607	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C610	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C800	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C803	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C806	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C812	OCC300CK41A	C1608C0G1H300JT 30pF 5% 50V
		C813	OCC300CK41A	C1608C0G1H300JT 30pF 5% 50V
		C814	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C815	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C817	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C818	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C819	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C820	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C822	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C823	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C824	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C825	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C827	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C828	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C829	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C830	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C831	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C833	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C845	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C868	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C870	OCK103CK56A	0603B103K500CT 10nF 10% 50V

DATE: 2006. 04. 05.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C1461	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1466	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1467	OCC101CK41A	C1608C0G1H101JT 100pF 5% 50
		C1469	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C147	OCK102CK56A	0603B102K500CT 1nF 10% 50V
		C1470	OCC102CK41A	C1608C0G1H102JT 1nF 5% 50V
		C1473	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1475	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1476	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C150	OCK102CK56A	0603B102K500CT 1nF 10% 50V
		C151	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C152	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C178	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1800	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1801	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1802	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1803	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C1804	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1805	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1806	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1807	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1808	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1809	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1810	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1812	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1815	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1852	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C218	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C219	OCC680CK41A	C1608C0G1H680JT 68pF 5% 50V
		C220	OCC680CK41A	C1608C0G1H680JT 68pF 5% 50V
		C221	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C222	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C223	OCC101CK41A	C1608C0G1H101JT 100pF 5% 50
		C225	OCK273CK56A	0603B273K500CT 27nF 10% 50V
		C226	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C229	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C231	OCK273CK56A	0603B273K500CT 27nF 10% 50V
		C233	OCC271CK41A	C1608C0G1H271JT 270pF 5% 50
		C315	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C320	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C348	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C350	OCC102CK41A	C1608C0G1H102JT 1nF 5% 50V
		C352	OCK563CK56A	C1608X7R1H563KT 56pF 10% 50
		C353	OCK223CK56A	UMK107JB223KA-T22nF 10% 50
		C356	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C406	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C407	OCH5010K116	0805N1R0D500LT 1pF 0.5PF 50
		C408	OCH5010K116	0805N1R0D500LT 1pF 0.5PF 50
		C415	OCC560CK41A	C1608C0G1H560JT 56pF 5% 50V
		C434	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C436	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C437	OCC101CK41A	C1608C0G1H101JT 100pF 5% 50
		C444	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C445	OCK471CK56A	C1608X7R1H471KT 470pF 10% 5
		C469	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C479	OCK471CK56A	C1608X7R1H471KT 470pF 10% 5
		C483	OCK471CK56A	C1608X7R1H471KT 470pF 10% 5
		C493	OCK102CK56A	0603B102K500CT 1nF 10% 50V
		C495	OCK102CK56A	0603B102K500CT 1nF 10% 50V
		C502	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C503	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C506	OCC120CK41A	C1608C0G1H120JT 12pF 5% 50V

DATE: 2006. 04. 05.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C514	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C603	OCC221CK41A	C1608C0G1H221JT 220pF 5% 50
		C608	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C609	OCC470CK41A	C1608C0G1H470JT 47pF 5% 50V
		C624	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C816	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C821	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C826	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C843	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C844	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C846	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C847	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C848	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C849	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C850	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C851	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C852	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C854	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C856	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C857	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C858	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C859	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C860	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C861	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C862	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C863	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C864	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C865	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C866	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C867	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C869	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C871	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C872	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C873	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C875	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C876	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C877	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C878	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C879	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C880	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C882	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C883	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C884	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C885	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C887	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C888	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C889	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C890	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C891	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C892	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C893	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C894	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C895	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C896	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C897	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C899	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C902	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C903	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C906	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C907	OCK103CK56A	0603B103K500CT 10nF 10% 50V
		C908	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C909	OCK103CK56A	0603B103K500CT 10nF 10% 50V

DATE: 2006. 04. 05.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C910	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C911	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C912	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C913	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C914	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C915	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C916	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C917	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C918	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C919	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C920	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C921	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C922	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C923	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C924	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C925	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C926	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C927	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C928	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C929	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C931	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C932	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C933	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C934	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C935	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C936	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C937	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C938	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C939	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C940	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C941	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C942	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C944	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C949	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C951	0CK104CK56A	0603B104K500CT 100nF 10% 50
		C1827	OCK471CK56A	C1608X7R1H471KT 470pF 10% 5
		C1828	OCK471CK56A	C1608X7R1H471KT 470pF 10% 5
		C1829	OCK471CK56A	C1608X7R1H471KT 470pF 10% 5
		C1830	OCK471CK56A	C1608X7R1H471KT 470pF 10% 5
		C1831	OCK471CK56A	C1608X7R1H471KT 470pF 10% 5
		C805	OCK471CK56A	C1608X7R1H471KT 470pF 10% 5
		C809	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C810	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C1Q32	OCK104CK56A	0603B104K500CT 100nF 10% 50
		C260	0CC331CK41A	C1608C0G1H331JT 330pF 5% 50
		C201	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C206	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C207	0CC680CK41A	C1608C0G1H680JT 68pF 5% 50V
		C208	0CC680CK41A	C1608C0G1H680JT 68pF 5% 50V
		C209	0CK103CK56A	0603B103K500CT 10nF 10% 50V
		C228	0CC271CK41A	C1608C0G1H271JT 270pF 5% 50
		C1426	0CF4741L438	PCMT 365 76474 470nF 5% 63V
		C1427	0CF4741L438	PCMT 365 76474 470nF 5% 63V
DIODEs				
		D1201	ODD184009AA	KDS184 KDS184 TP KEC - 85V
		D1007	ODD200009AF	RU2M 400V 1.2V 10UA 20A 400
		D1008	ODD200009AF	RU2M 400V 1.2V 10UA 20A 400
		D300	0DS226009AA	KDS226 1.2V 85V 300MA 2A 4N
		D500	0DS226009AA	KDS226 1.2V 85V 300MA 2A 4N
		D501	0DS226009AA	KDS226 1.2V 85V 300MA 2A 4N
COIL & CORE & INDUCTOR				
		L1000	6140VB0004B	LN-15A1 26uH -- 12X9MM LEA
		L1101	6140VB0004B	LN-15A1 26uH -- 12X9MM LEA
		L1105	6140VB0004B	LN-15A1 26uH -- 12X9MM LEA
		L1106	6140VB0004B	LN-15A1 26uH -- 12X9MM LEA
		L1107	6140VB0004B	LN-15A1 26uH -- 12X9MM LEA
		L1110	6140VB0004B	LN-15A1 26uH -- 12X9MM LEA

DATE: 2006. 04. 05.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		L207	OLC6461201A	D75C-646CY-121M=P3 120UH 20
		L120	OLCML00020G	MLI-201209-3R3K 3.3UH 10% -
		L121	OLCML00020G	MLI-201209-3R3K 3.3UH 10% -
		L122	OLCML00020G	MLI-201209-3R3K 3.3UH 10% -
		L123	OLCML00020G	MLI-201209-3R3K 3.3UH 10% -
		L206	OLCML00020G	MLI-201209-3R3K 3.3UH 10% -
		L311	OLCML00020C	MLI-201212-100K 10UH 10% -
		L407	OLCML00020C	MLI-201212-100K 10UH 10% -
		L408	OLCML00020C	MLI-201212-100K 10UH 10% -
		L204	OLCML00020G	MLI-201209-3R3K 3.3UH 10% -
FET & TRANSISTOR				
		IC1205	OTR830009BA	BSS83 N-CHANNEL MOSFET 10V
		IC1206	OTR830009BA	BSS83 N-CHANNEL MOSFET 10V
		IC1006	OTF492509AA	S14925DY P-CHANNEL -30V +2
		Q1000	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q1001	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q1004	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q1005	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q1201	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q212	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q300	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q301	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q302	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q303	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q304	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q400	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q401	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q402	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q404	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q408	OTR102009AM	KRA102S PNP -30V -50V -0.
		Q410	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q411	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q600	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q105	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q106	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q107	OTR102009AM	KRA102S PNP -30V -50V -0.
		Q201	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q202	OTR150400BA	2SA1504S(ASY) PNP -5V -50V
		Q203	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q204	OTR150400BA	2SA1504S(ASY) PNP -5V -50V
		Q205	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q206	OTR150400BA	2SA1504S(ASY) PNP -5V -50V
		Q207	OTR150400BA	2SA1504S(ASY) PNP -5V -50V
		Q305	OTR150400BA	2SA1504S(ASY) PNP -5V -50V
		Q403	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q405	OTR102009AM	KRA102S PNP -30V -50V -0.
		Q407	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q409	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q801	OTR150400BA	2SA1504S(ASY) PNP -5V -50V
		Q800	OTR102009AJ	KRC102S NPN 30V -50V 100MA
		Q1006	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q211	OTR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q200	OTR150400BA	2SA1504S(ASY) PNP -5V -50V
RESISTORs				
		AR800	ORJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W
		AR801	ORJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W
		AR802	ORJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W
		AR803	ORJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W
DATE: 2006. 04. 05.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		AR804	ORJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W
		AR805	ORJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W
		AR806	ORJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W
		AR807	ORJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W
		R226	ORD0331H609	RD-92T1J3R30 3.3OHM 5% 1/2W
		C832	OCK104CK56A	0603B104K500CT 100nF 10% 50%-CKD
		C832	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W-SKD
		L1853	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		L1856	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R1002	ORJ1801D677	MCR03EZPJ182 1.8KOHM 5% 1/1
		R1003	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R1005	ORJ2000D677	MCR03EZPJ201 200OHM 5% 1/10
		R1010	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1012	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1015	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1016	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1017	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1019	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1020	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1021	ORJ2002D677	MCR03EZPJ203 20KOHM 5% 1/1
		R1100	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1101	ORJ1201D677	MCR03EZPJ122 1.2KOHM 5% 1/1
		R1200	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1206	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W
		R1210	ORJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W
		R1215	ORJ0102D677	MCR03EZPJ100 10OHM 5% 1/10W
		R1216	ORJ0102D677	MCR03EZPJ100 10OHM 5% 1/10W
		R1217	ORJ0102D677	MCR03EZPJ100 10OHM 5% 1/10W
		R1218	ORJ0102D677	MCR03EZPJ100 10OHM 5% 1/10W
		R1219	ORJ0102D677	MCR03EZPJ100 10OHM 5% 1/10W
		R1220	ORJ0102D677	MCR03EZPJ100 10OHM 5% 1/10W
		R1221	ORJ0102D677	MCR03EZPJ100 10OHM 5% 1/10W
		R1222	ORJ0102D677	MCR03EZPJ100 10OHM 5% 1/10W
		R1237	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10
		R1238	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10
		R1251	ORJ1502D677	MCR03EZPJ153 15KOHM 5% 1/10
		R1253	ORJ1502D677	MCR03EZPJ153 15KOHM 5% 1/10
		R1257	ORJ222D677	MCR03EZPJ220 22OHM 5% 1/10W
		R1258	ORJ222D677	MCR03EZPJ220 22OHM 5% 1/10W
		R1261	ORJ222D677	MCR03EZPJ220 22OHM 5% 1/10W
		R1263	ORJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W
		R1264	ORJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W
		R1265	ORJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W
		R1266	ORJ1004D677	MCR03EZPJ105 1MOHM 5% 1/10W
		R1267	ORJ1820D477	MCR03EZPF1820 182OHM 1% 1/1
		R1268	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R1269	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R1272	ORJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W
		R1274	ORJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W
		R1275	ORJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W
		R1276	ORJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W
		R1279	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W
		R1280	ORJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W
		R1406	ORJ0101D677	MCR03EZPJ1R0 1OHM 5% 1/10W
		R1413	ORJ0221D677	MCR03EZPJ2R2 2.2OHM 5% 1/10
		R1414	ORJ0221D677	MCR03EZPJ2R2 2.2OHM 5% 1/10
		R1415	ORJ0221D677	MCR03EZPJ2R2 2.2OHM 5% 1/10
		R1416	ORJ0221D677	MCR03EZPJ2R2 2.2OHM 5% 1/10
		R1438	ORJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W
		R1439	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10
		R1440	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W
		R1441	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W

DATE: 2006. 04. 05.					
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	
		R1442	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1447	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1	
		R1450	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W	
		R1451	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W	
		R1452	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W	
		R1458	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R1460	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1461	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1463	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1465	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1466	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1469	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1802	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R1803	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R1807	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R1808	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R1814	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1815	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1816	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1817	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1818	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1819	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1820	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1821	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1822	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1823	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1825	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1866	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R1867	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R1889	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W	
		R247	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R306	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R311	ORJ2200D677	MCR03EZPJ221 220QHM 5% 1/10	
		R312	ORJ2200D677	MCR03EZPJ221 220OHM 5% 1/10	
		R313	ORJ2200D677	MCR03EZPJ221 220OHM 5% 1/10	
		R314	ORJ2200D677	MCR03EZPJ221 220OHM 5% 1/10	
		R315	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R316	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R317	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R318	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R319	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R320	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R322	ORJ1000D677	MCR03EZPJ104 100KOHM 5% 1/1	
		R323	ORJ2200D677	MCR03EZPJ221 220OHM 5% 1/10	
		R324	ORJ2200D677	MCR03EZPJ221 220OHM 5% 1/10	
		R326	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R329	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R330	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R333	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R334	ORJ1201D677	MCR03EZPJ122 1.2KOHM 5% 1/1	
		R335	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R336	ORJ1201D677	MCR03EZPJ122 1.2KOHM 5% 1/1	
		R337	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R338	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R339	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R340	ORJ1201D677	MCR03EZPJ122 1.2KOHM 5% 1/1	
		R341	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R342	ORJ1201D677	MCR03EZPJ122 1.2KOHM 5% 1/1	
		R343	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R344	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R345	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R346	ORJ1201D677	MCR03EZPJ122 1.2KOHM 5% 1/1	
		R347	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R348	ORJ1201D677	MCR03EZPJ122 1.2KOHM 5% 1/1	
		R349	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R350	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R352	ORJ1201D677	MCR03EZPJ122 1.2KOHM 5% 1/1	
		R354	ORJ1201D677	MCR03EZPJ122 1.2KOHM 5% 1/1	
		R355	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R356	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R357	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R358	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R359	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R360	ORJ1003D677	MCR03EZPJ104 100KOHM 5% 1/1	
		R361	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R362	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R371	ORJ5600D677	MCR03EZPJ561 560OHM 5% 1/10	
		R372	ORJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W	
		R376	ORJ3901D677	MCR03EZPJ392 3.9KOHM 5% 1/1	
		R400	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R410	ORJ0622D677	MCR03EZPJ620 62OHM 5% 1/10W	
		R411	ORJ2402D677	MCR03EZPJ243 24KOHM 5% 1/10	
		R412	ORJ1501D677	MCR03EZPJ152 1.5KOHM 5% 1/1	
		R413	ORJ4700D677	MCR03EZPJ471 470OHM 5% 1/10	
		R425	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R426	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R427	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R428	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R429	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W	
		R430	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W	
		R431	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W	
		R432	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W	
		R436	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R437	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R438	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R444	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R451	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R452	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R453	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R454	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R458	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R460	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R461	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R462	ORJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W	
		R481	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1	
		R482	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1	
		R494	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R516	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R517	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R518	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R520	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R521	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R524	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R525	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R526	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R527	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R536	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R537	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R600	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R601	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R602	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R603	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R607	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R608	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	


DATE: 2006. 04. 05.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R609	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10
		R619	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R621	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W
		R800	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R810	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R814	ORJ2701D677	MCR03EZPJ272 2.7KOHM 5% 1/1
		R818	ORJ2701D677	MCR03EZPJ272 2.7KOHM 5% 1/1
		R819	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R821	ORJ3301D677	MCR03EZPJ332 3.3KOHM 5% 1/1
		R829	ORJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W
		R830	ORJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W
		R833	ORH0202D622	MCR10EZHJ200 200OHM 5% 1/8W
		R835	ORJ0562D677	MCR03EZPJ560 560OHM 5% 1/10W
		R836	ORJ0562D677	MCR03EZPJ560 560OHM 5% 1/10W
		R837	ORH0202D622	MCR10EZHJ200 200OHM 5% 1/8W
		R839	ORJ0562D677	MCR03EZPJ560 560OHM 5% 1/10W
		R840	ORJ0562D677	MCR03EZPJ560 560OHM 5% 1/10W
		R841	ORH0202D622	MCR10EZHJ200 200OHM 5% 1/8W
		R844	ORJ0562D677	MCR03EZPJ560 560OHM 5% 1/10W
		R845	ORH0202D622	MCR10EZHJ200 200OHM 5% 1/8W
		R846	ORH0202D622	MCR10EZHJ200 200OHM 5% 1/8W
		R847	ORH0202D622	MCR10EZHJ200 200OHM 5% 1/8W
		R849	ORJ0562D677	MCR03EZPJ560 560OHM 5% 1/10W
		R852	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R853	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R861	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R862	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R863	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R864	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R867	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R868	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R870	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R871	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R872	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R873	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R874	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R878	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R879	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R880	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R881	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R882	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R883	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R884	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R885	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R889	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R890	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R891	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R892	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R893	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R894	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R905	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R906	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R907	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R909	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R910	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R911	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R912	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R917	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R918	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R921	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R922	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R937	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R938	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R940	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		L126	ORH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2
		L127	ORH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2
		L128	ORH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2
		L1852	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		L1854	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		L1855	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		L1857	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		L409	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		L410	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		L411	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		L412	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R1001	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1008	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1013	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R1102	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1103	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1104	ORJ2002D677	MCR03EZPJ203. 20KOHM 5% 1/1
		R1213	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R1236	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W
		R1240	ORJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10
		R1241	ORJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10
		R1250	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10
		R1252	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10
		R1254	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10
		R1255	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10
		R1260	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1262	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1273	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R1278	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10
		R1403	ORJ0221D677	MCR03EZPJ2R2 2.2OHM 5% 1/10
		R1404	ORJ0221D677	MCR03EZPJ2R2 2.2OHM 5% 1/10
		R1407	ORJ0221D677	MCR03EZPJ2R2 2.2OHM 5% 1/10
		R1409	ORJ0221D677	MCR03EZPJ2R2 2.2OHM 5% 1/10
		R1417	ORJ0331D677	MCR03EZPJ3R3 3.3OHM 5% 1/10
		R1423	ORJ0331D677	MCR03EZPJ3R3 3.3OHM 5% 1/10
		R1424	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1425	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1426	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1427	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1432	ORJ0101D677	MCR03EZPJ1R0 1OHM 5% 1/10W
		R1433	ORJ0101D677	MCR03EZPJ1R0 1OHM 5% 1/10W
		R1434	ORJ0101D677	MCR03EZPJ1R0 1OHM 5% 1/10W
		R1435	ORJ0101D677	MCR03EZPJ1R0 1OHM 5% 1/10W
		R1448	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R1449	ORJ3301D677	MCR03EZPJ332 3.3KOHM 5% 1/1
		R1459	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R1470	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R168	ORJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W
		R169	ORJ2203D677	MCR03EZPJ224 220KOHM 5% 1/1
		R170	ORJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W
		R171	ORJ2203D677	MCR03EZPJ224 220KOHM 5% 1/1
		R172	ORJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W
		R173	ORJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W
		R180	ORJ2203D677	MCR03EZPJ224 220KOHM 5% 1/1
		R181	ORJ2203D677	MCR03EZPJ224 220KOHM 5% 1/1
		R182	ORJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W
		R183	ORJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W
		R1830	ORJ3301D677	MCR03EZPJ332 3.3KOHM 5% 1/1-CKD
		R1830	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W-SKD
		R1831	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W-CKD

DATE: 2006. 04. 05.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R184	ORJ0752D677	MCR03EZPJ750 750OHM 5% 1/10W
		R1842	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1843	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1844	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1845	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1846	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1847	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1848	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1849	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1850	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1851	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1852	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1853	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1854	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1855	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1856	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R1857	ORJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W
		R186	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1864	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1865	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1868	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1869	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1870	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1873	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1874	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1875	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R1878	ORJ1201D677	MCR03EZPJ122 1.2KOHM 5% 1/1
		R1879	ORJ0512D677	MCR03EZPJ510 510OHM 5% 1/10W
		R188	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W
		R1880	ORJ222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R1881	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W
		R189	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W
		R198	ORJ0822D677	MCR03EZPJ820 820OHM 5% 1/10W
		R199	ORJ0822D677	MCR03EZPJ820 820OHM 5% 1/10W
		R208	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R209	ORJ2201D677	MCR03EZPJ222 2.2KOHM 5% 1/1
		R210	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R2100	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R2101	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R2102	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R2105	ORJ4703D677	MCR03EZPJ474 470KOHM 5% 1/1
		R2106	ORJ4703D677	MCR03EZPJ474 470KOHM 5% 1/1
		R2108	ORJ2203D677	MCR03EZPJ224 220KOHM 5% 1/1
		R2109	ORJ2203D677	MCR03EZPJ224 220KOHM 5% 1/1
		R211	ORJ0222D677	MCR03EZPJ220 220OHM 5% 1/10W
		R2112	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10
		R2113	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W
		R2114	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W
		R2115	ORJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W
		R2116	ORJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W
		R212	ORJ102D677	MCR03EZPJ100 100OHM 5% 1/10W
		R213	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W
		R214	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R215	ORJ3300D677	MCR03EZPJ331 330OHM 5% 1/10
		R216	ORJ3300D677	MCR03EZPJ331 330OHM 5% 1/10
		R217	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R218	ORJ4700D677	MCR03EZPJ471 470OHM 5% 1/10
		R219	ORJ0822D677	MCR03EZPJ820 820OHM 5% 1/10W
		R220	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R221	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R222	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W
		R223	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W


DATE: 2006. 04. 05.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R224	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R225	ORJ2000D677	MCR03EZPJ201 200OHM 5% 1/10
		R227	ORJ2700D677	MCR03EZPJ271 270OHM 5% 1/10
		R228	ORJ2200D677	MCR03EZPJ221 220OHM 5% 1/10
		R229	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W
		R230	ORJ1800D677	MCR03EZPJ181 180OHM 5% 1/10
		R231	ORJ1500D677	MCR03EZPJ151 150OHM 5% 1/10
		R232	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R233	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R239	ORJ2201D677	MCR03EZPJ222 2.2KOHM 5% 1/1
		R245	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R248	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R2811	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R2812	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R305	ORJ3300D677	MCR03EZPJ331 330OHM 5% 1/10
		R309	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10
		R310	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10
		R327	ORJ2200D677	MCR03EZPJ221 220OHM 5% 1/10
		R328	ORJ2200D677	MCR03EZPJ221 220OHM 5% 1/10
		R363	ORJ2200D677	MCR03EZPJ221 220OHM 5% 1/10
		R364	ORJ2200D677	MCR03EZPJ221 220OHM 5% 1/10
		R365	ORJ1503D677	MCR03EZPJ154 150KOHM 5% 1/1
		R366	ORJ0752D677	MCR03EZPJ750 750OHM 5% 1/10W
		R367	ORJ0752D677	MCR03EZPJ750 750OHM 5% 1/10W
		R368	ORJ0752D677	MCR03EZPJ750 750OHM 5% 1/10W
		R369	ORJ4703D677	MCR03EZPJ474 470KOHM 5% 1/1
		R370	ORJ4703D677	MCR03EZPJ474 470KOHM 5% 1/1
		R375	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R406	ORJ0432D677	MCR03EZPJ430 430OHM 5% 1/10W
		R409	ORJ0432D677	MCR03EZPJ430 430OHM 5% 1/10W
		R455	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R456	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R457	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R459	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R463	ORJ4703D677	MCR03EZPJ474 470KOHM 5% 1/1
		R464	ORJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W
		R465	ORJ1501D677	MCR03EZPJ152 1.5KOHM 5% 1/1
		R466	ORJ4703D677	MCR03EZPJ474 470KOHM 5% 1/1
		R467	ORJ1501D677	MCR03EZPJ152 1.5KOHM 5% 1/1
		R469	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R474	ORJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W
		R475	ORJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W
		R476	ORJ4703D677	MCR03EZPJ474 470KOHM 5% 1/1
		R477	ORJ4703D677	MCR03EZPJ474 470KOHM 5% 1/1
		R478	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R479	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R484	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R486	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R492	ORJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W
		R493	ORJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W
		R500	ORJ2203D677	MCR03EZPJ224 220KOHM 5% 1/1
		R501	ORJ2203D677	MCR03EZPJ224 220KOHM 5% 1/1
		R502	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W
		R503	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W
		R504	ORJ0752D677	MCR03EZPJ750 750OHM 5% 1/10W
		R505	ORJ0752D677	MCR03EZPJ750 750OHM 5% 1/10W
		R506	ORJ0752D677	MCR03EZPJ750 750OHM 5% 1/10W
		R507	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R508	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1
		R509	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R510	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W
		R511	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W

DATE: 2006. 04. 05.					
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	
		R512	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R513	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R514	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R515	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R519	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R522	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R523	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R531	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R532	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R533	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R534	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1	
		R540	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R541	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R542	ORJ4700D677	MCR03EZPJ471 470OHM 5% 1/10	
		R544	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W- SKD	
		R604	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1	
		R605	ORJ4700D677	MCR03EZPJ471 470OHM 5% 1/10	
		R606	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R809	ORJ1000D677	MCR03EZPJ101 100OHM 5% 1/10	
		R834	ORH0202D622	MCR10EZHJ200 200HM 5% 1/8W	
		R838	ORH0202D622	MCR10EZHJ200 200HM 5% 1/8W	
		R842	ORH0202D622	MCR10EZHJ200 200HM 5% 1/8W	
		R851	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R854	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R855	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R857	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R859	ORJ222D677	MCR03EZPJ220 220OHM 5% 1/10W	
		R860	ORJ222D677	MCR03EZPJ220 220OHM 5% 1/10W	
		R865	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R866	ORJ222D677	MCR03EZPJ220 220OHM 5% 1/10W	
		R875	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R876	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R877	ORJ332D677	MCR03EZPJ330 330HM 5% 1/10W	
		R886	ORJ332D677	MCR03EZPJ330 330HM 5% 1/10W	
		R887	ORJ332D677	MCR03EZPJ330 330HM 5% 1/10W	
		R888	ORJ332D677	MCR03EZPJ330 330HM 5% 1/10W	
		R900	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R904	ORJ0600D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R908	ORJ222D677	MCR03EZPJ220 220HM 5% 1/10W	
		R914	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R915	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R919	ORJ2700D677	MCR03EZPJ271 270OHM 5% 1/10	
		R920	ORJ2700D677	MCR03EZPJ271 270QHM 5% 1/10	
		R923	ORJ1200D677	MCR03EZPJ121 120OHM 5% 1/10	
		R924	ORJ1200D677	MCR03EZPJ121 120OHM 5% 1/10	
		R934	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R824	ORH0202D622	MCR10EZHJ200 200HM 5% 1/8W	
		R826	ORH0202D622	MCR10EZHJ200 200HM 5% 1/8W	
		R828	ORH0202D622	MCR10EZHJ200 200HM 5% 1/8W	
		L129	ORH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2	
		L130	ORH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2	
		L131	ORH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2	
		R175	ORJ2203D677	MCR03EZPJ224 220KOHM 5% 1/1	
		R176	ORJ2203D677	MCR03EZPJ224 220KOHM 5% 1/1	
		R177	ORJ0752D677	MCR03EZPJ750 750HM 5% 1/10W	
		R178	ORJ0752D677	MCR03EZPJ750 750HM 5% 1/10W	
		R179	ORJ0752D677	MCR03EZPJ750 750HM 5% 1/10W	
		R193	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R194	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R2107	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R2803	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R1810	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/42LC2R	
DATE: 2006. 04. 05.					
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	
		L1819	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		L1820	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		L1821	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		L1822	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		L1823	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1828	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W- 42LC2R	
		R2800	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1	
		R2801	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1	
		R2802	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R820	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1	
		R822	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1	
		R1022	ORJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W	
		R1023	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R1829	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R1007	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10-37LC2R	
		R4007	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1-42LC2R	
		R1895	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W-37LC2R	
		R1896	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W-42LC2R	
		R1897	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W-42LC2R	
		R856	ORJ1501D677	MCR03EZPJ152 1.5KOHM 5% 1/1-37LC2R	
		R856	ORJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/1-42LC2R	
		R858	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W-42LC2R	
		R58	ORJ1501D677	MCR03EZPJ152 1.5KOHM 5% 1/1-37LC2R	
		R246	ORJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10	
		R200	ORJ0822D677	MCR03EZPJ820 820HM 5% 1/10W	
		R201	ORJ4700D677	MCR03EZPJ471 470OHM 5% 1/10	
		R202	ORJ4700D677	MCR03EZPJ471 470OHM 5% 1/10	
		R203	ORJ3900D677	MCR03EZPJ391 390OHM 5% 1/10	
		R204	ORJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W	
		R205	ORJ2201D677	MCR03EZPJ222 2.2KOHM 5% 1/1	
		R206	ORJ3300D677	MCR03EZPJ331 330OHM 5% 1/10	
		R207	ORJ3300D677	MCR03EZPJ331 330OHM 5% 1/10	
OTHERs					
		D1003	ODL233309AC	SAM2333 RED/Y-GREEN 2.7V 2.	
		D1103	ODL233309AC	SAM2333 RED/Y-GREEN 2.7V 2.	
		X400	156-A02M	HC-49/U 18.432MHZ 30PPM 18.	
		X1200	6202TST001H	SX-1 27MHZ 30PPM 27MHZ 30PP	
		X800	6212AB2015J	HC-49SM 19.66080HZ 19.6608H	
		X300	166-E02F	CSBLA500KECF09-B0 500KHZ 2	
		SW800	6600VR1004A	SKHMPWE010 1C1P 12VDC 0.05A	
		SW900	6600VR1004A	SKHMPWE010 1C1P 12VDC 0.05A	
		TU200	6700MF0017B	TAFV-W302P PAL - - - HORI	
		TU201	6700MF0017A	TAUV-W301P PAL - - - HORI	
CONTROL BOARD					
		SW101	140-313A	THVV501BBC 1C1P 12VDC 0.05A	
		SW102	140-313A	THVV501BBC 1C1P 12VDC 0.05A	
		SW103	140-313A	THVV501BBC 1C1P 12VDC 0.05A	
		SW104	140-313A	THVV501BBC 1C1P 12VDC 0.05A	
		SW105	140-313A	THVV501BBC 1C1P 12VDC 0.05A	
		SW106	140-313A	THVV501BBC 1C1P 12VDC 0.05A	
		SW107	140-313A	THVV501BBC 1C1P 12VDC 0.05A	
		SW108	140-313A	THVV501BBC 1C1P 12VDC 0.05A	
		R101	ORH1302D622	MCR10EZHJ133 13KOHM 5% 1/8W	
		R102	ORH4701D622	MCR10EZHJ472 4.7KOHM 5% 1/8	
		R103	ORH1501D622	MCR10EZHJ152 1.5KOHM 5% 1/8	
		R104	ORH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2	
		R105	ORH1302D622	MCR10EZHJ133 13KOHM 5% 1/8W	
		R106	ORH4701D622	MCR10EZHJ472 4.7KOHM 5% 1/8	


DATE: 2006.04.05.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R107	0RH1501D622	MCR10EZHJ152 1.5KOHM 5% 1/8
		R108	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2
PREAMP&LED BOARD				
		C200	0CH5101K416	C2012C0G1H101JT 100pF 5% 50
		C201	0CH5330K416	C2012C0G1H330JT 33pF 5% 50V
		C202	0CE476VF6DC	VGV476M016S0ANE010 47uF 20%
		C203	0CE476VF6DC	VGV476M016S0ANE010 47uF 20%
		C204	0CE476VF6DC	VGV476M016S0ANE010 47uF 20%
		L200	OLC1032101A	FI-C3216-103KJT 10UH 10% -
		Q200	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q201	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		Q202	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50
		R200	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2
		R201	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2
		R202	0RH4700D622	MCR10EZHJ471 470OHM 5% 1/8W
		R203	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2
		R204	0RH4700D622	MCR10EZHJ471 470OHM 5% 1/8W
		R205	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2
		R206	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2
		R207	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W
		R208	0RH4700D622	MCR10EZHJ471 470OHM 5% 1/8W
		D200	0DLAU0410AA	SAW5670 ROUND 5mM AMBER/WHT
		IC201	6712000013A	TSOP4438SO1 4.5TO5.5V 1.5MA
SIDE A/V BOARD				
		C101	0CH5101K416	C2012C0G1H101JT 100pF 5% 50
		C102	0CH5101K416	C2012C0G1H101JT 100pF 5% 50
		R102	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2
		R103	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2
		R104	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2
		R105	0RH4700D622	MCR10EZHJ471 470OHM 5% 1/8W
		R106	0RH4700D622	MCR10EZHJ471 470OHM 5% 1/8W

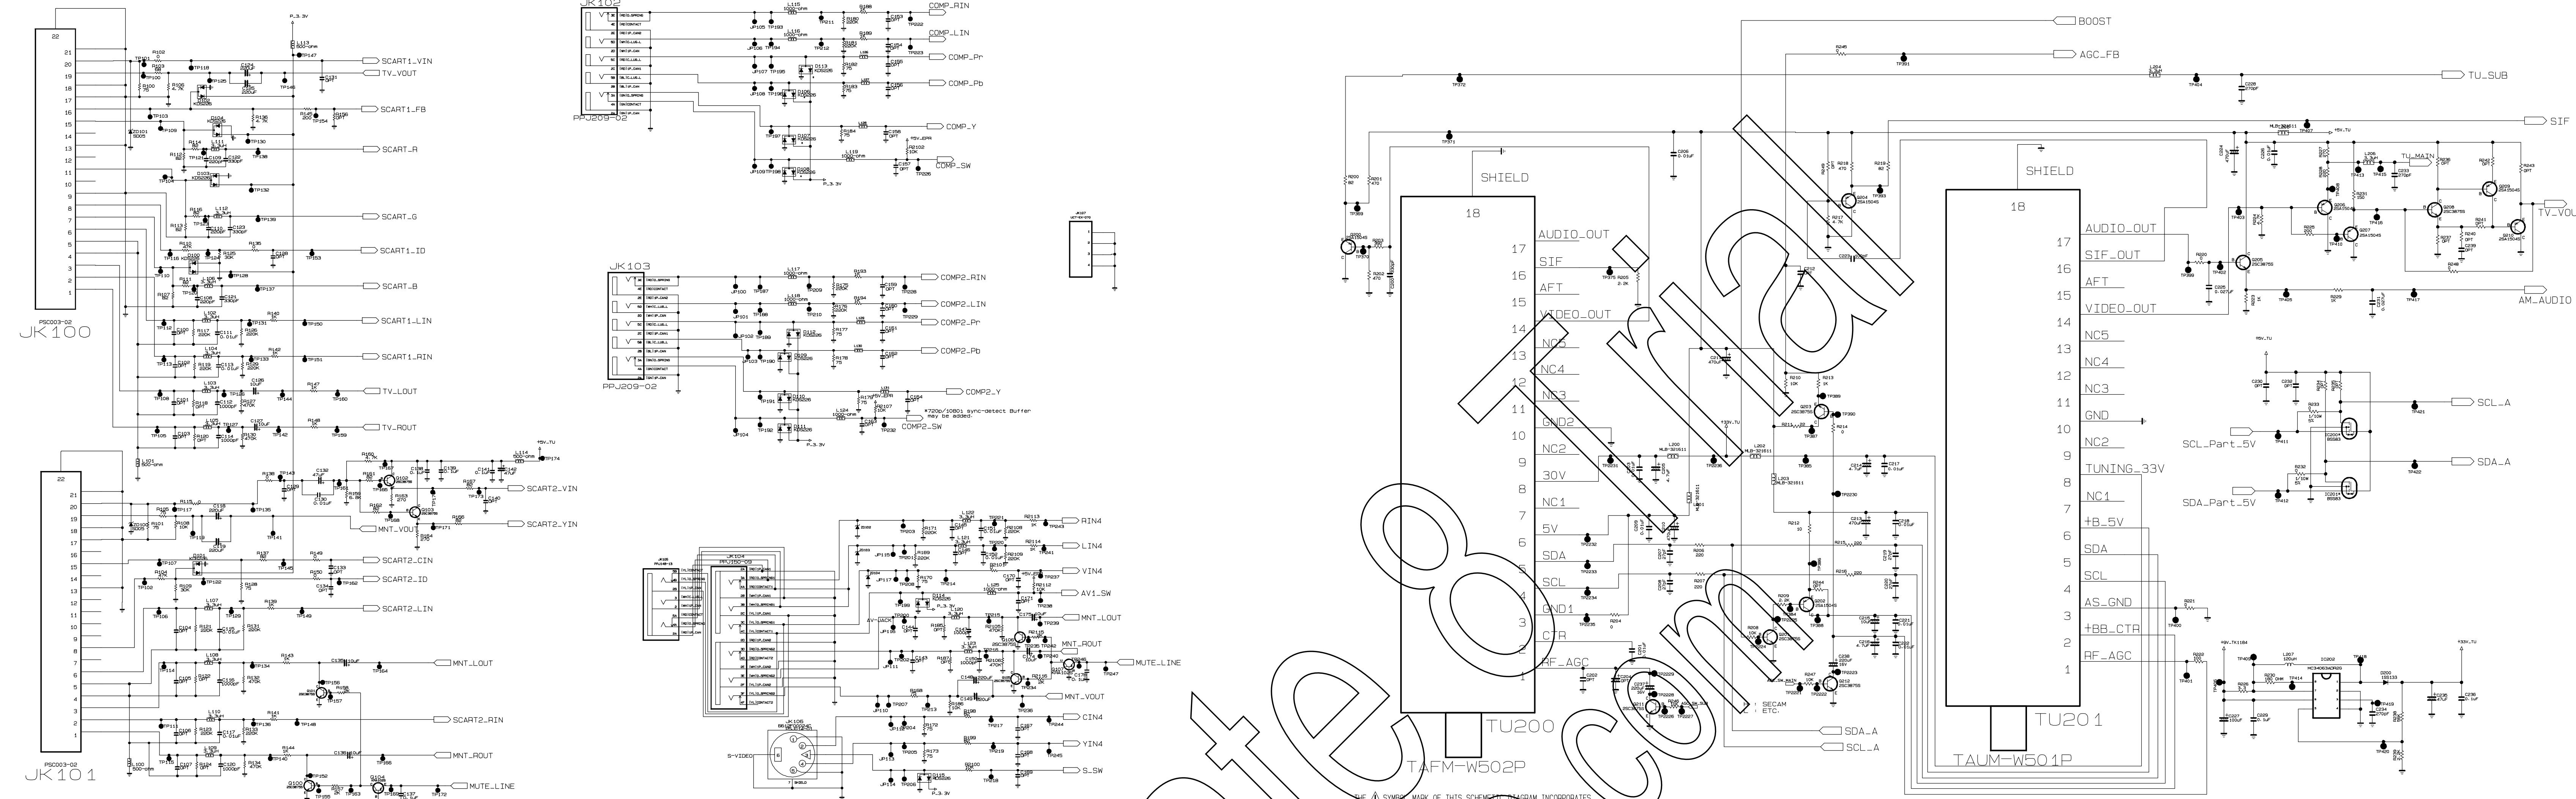


THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION, FIRE AND ELECTRICAL SHOCK HAZARDS. WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

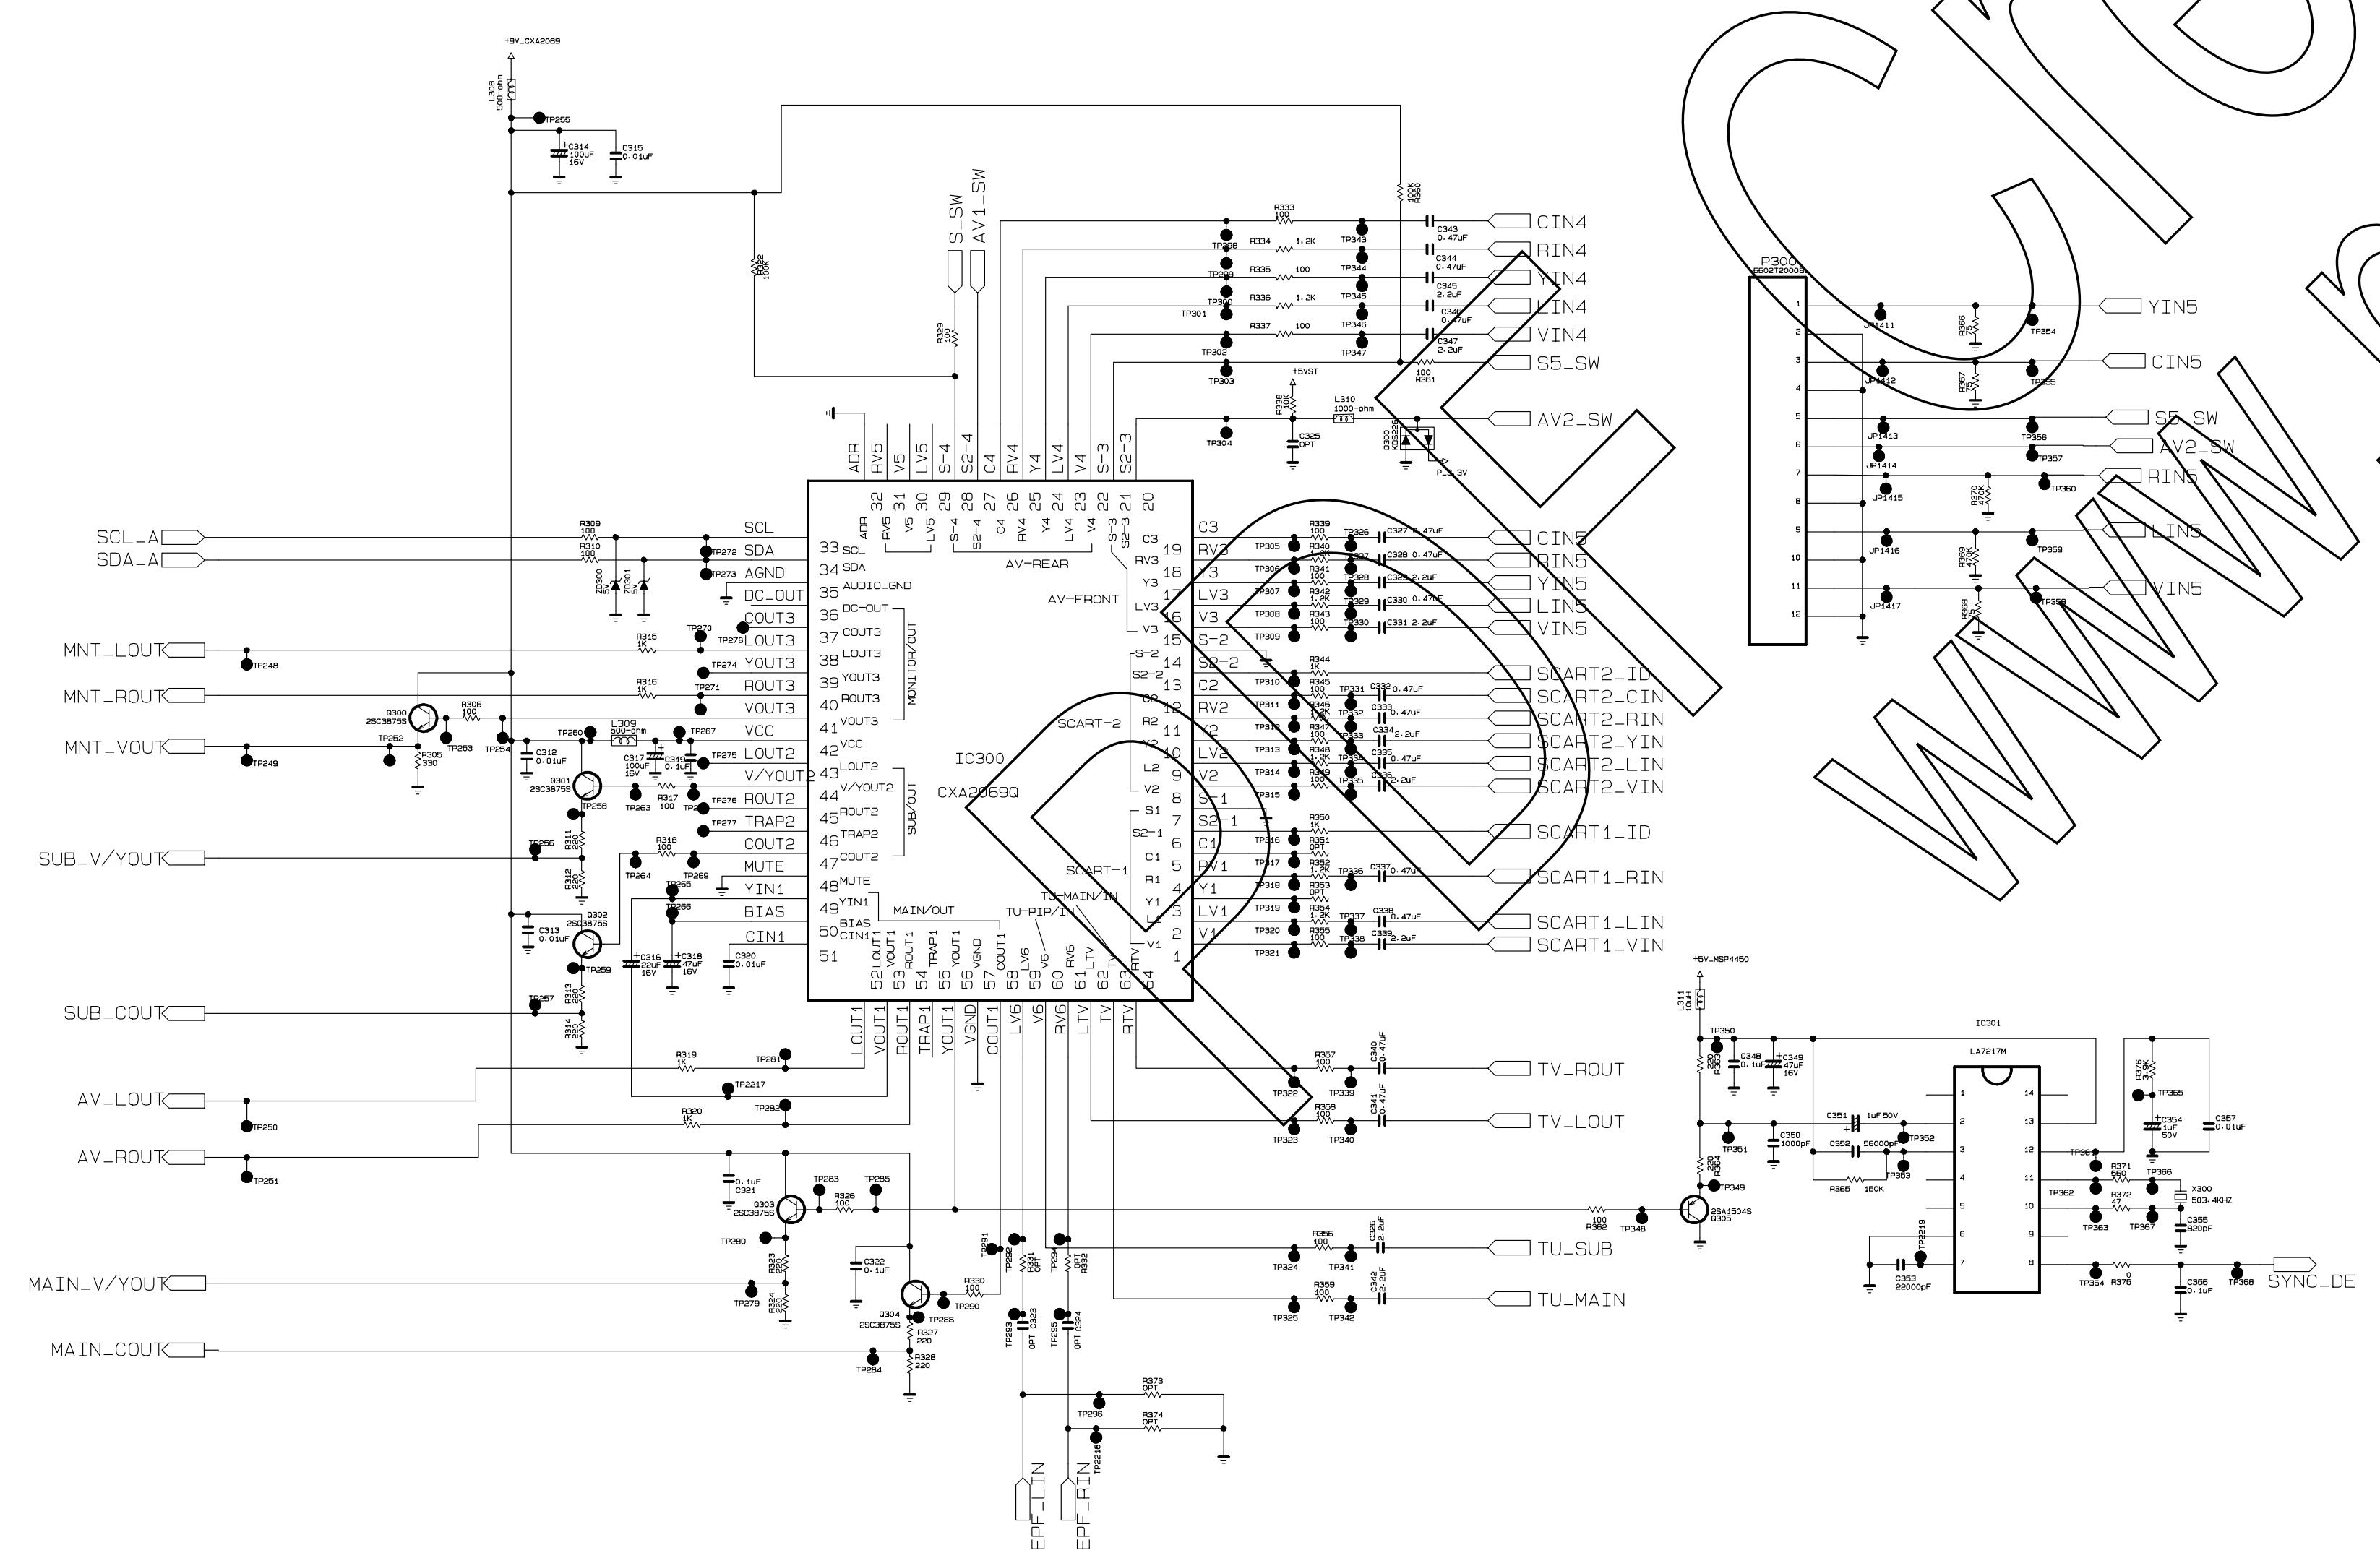


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION, FIRE AND ELECTRICAL SHOCK HAZARDS. WHEN SERVICING IT IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.




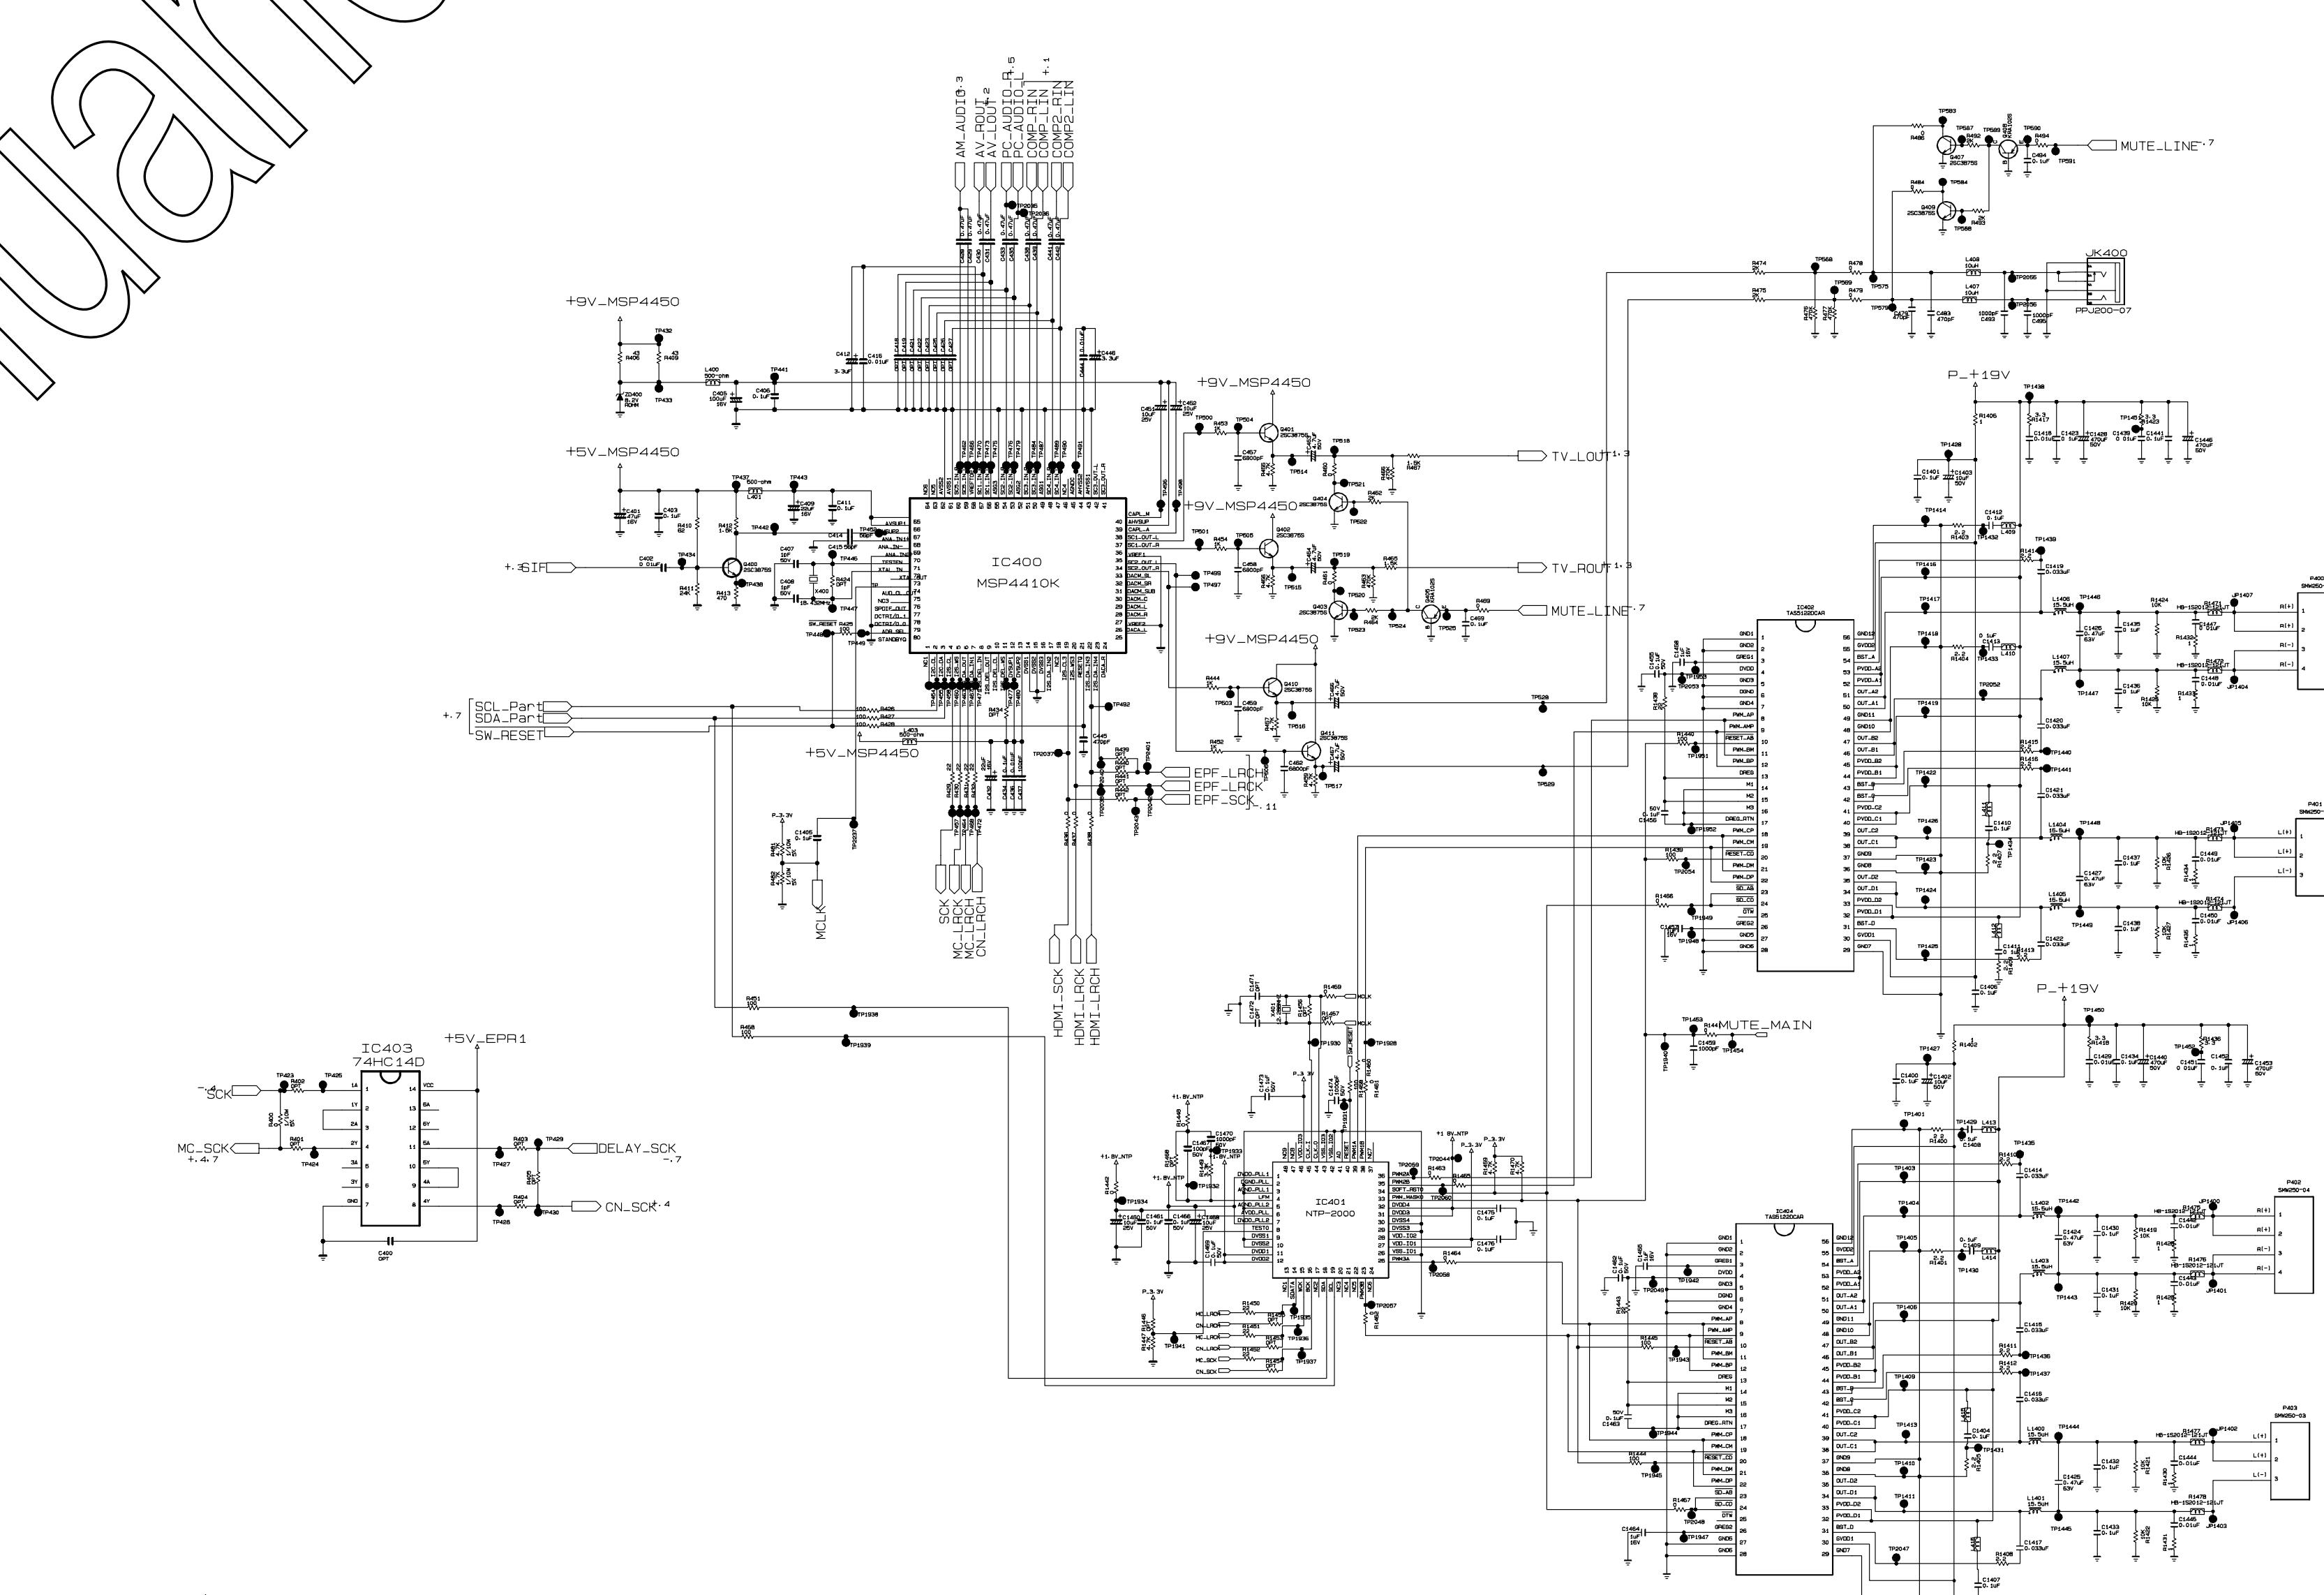


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION, FIRE AND ELECTRICAL SHOCK HAZARDS. WHEN SERVICING IT IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.

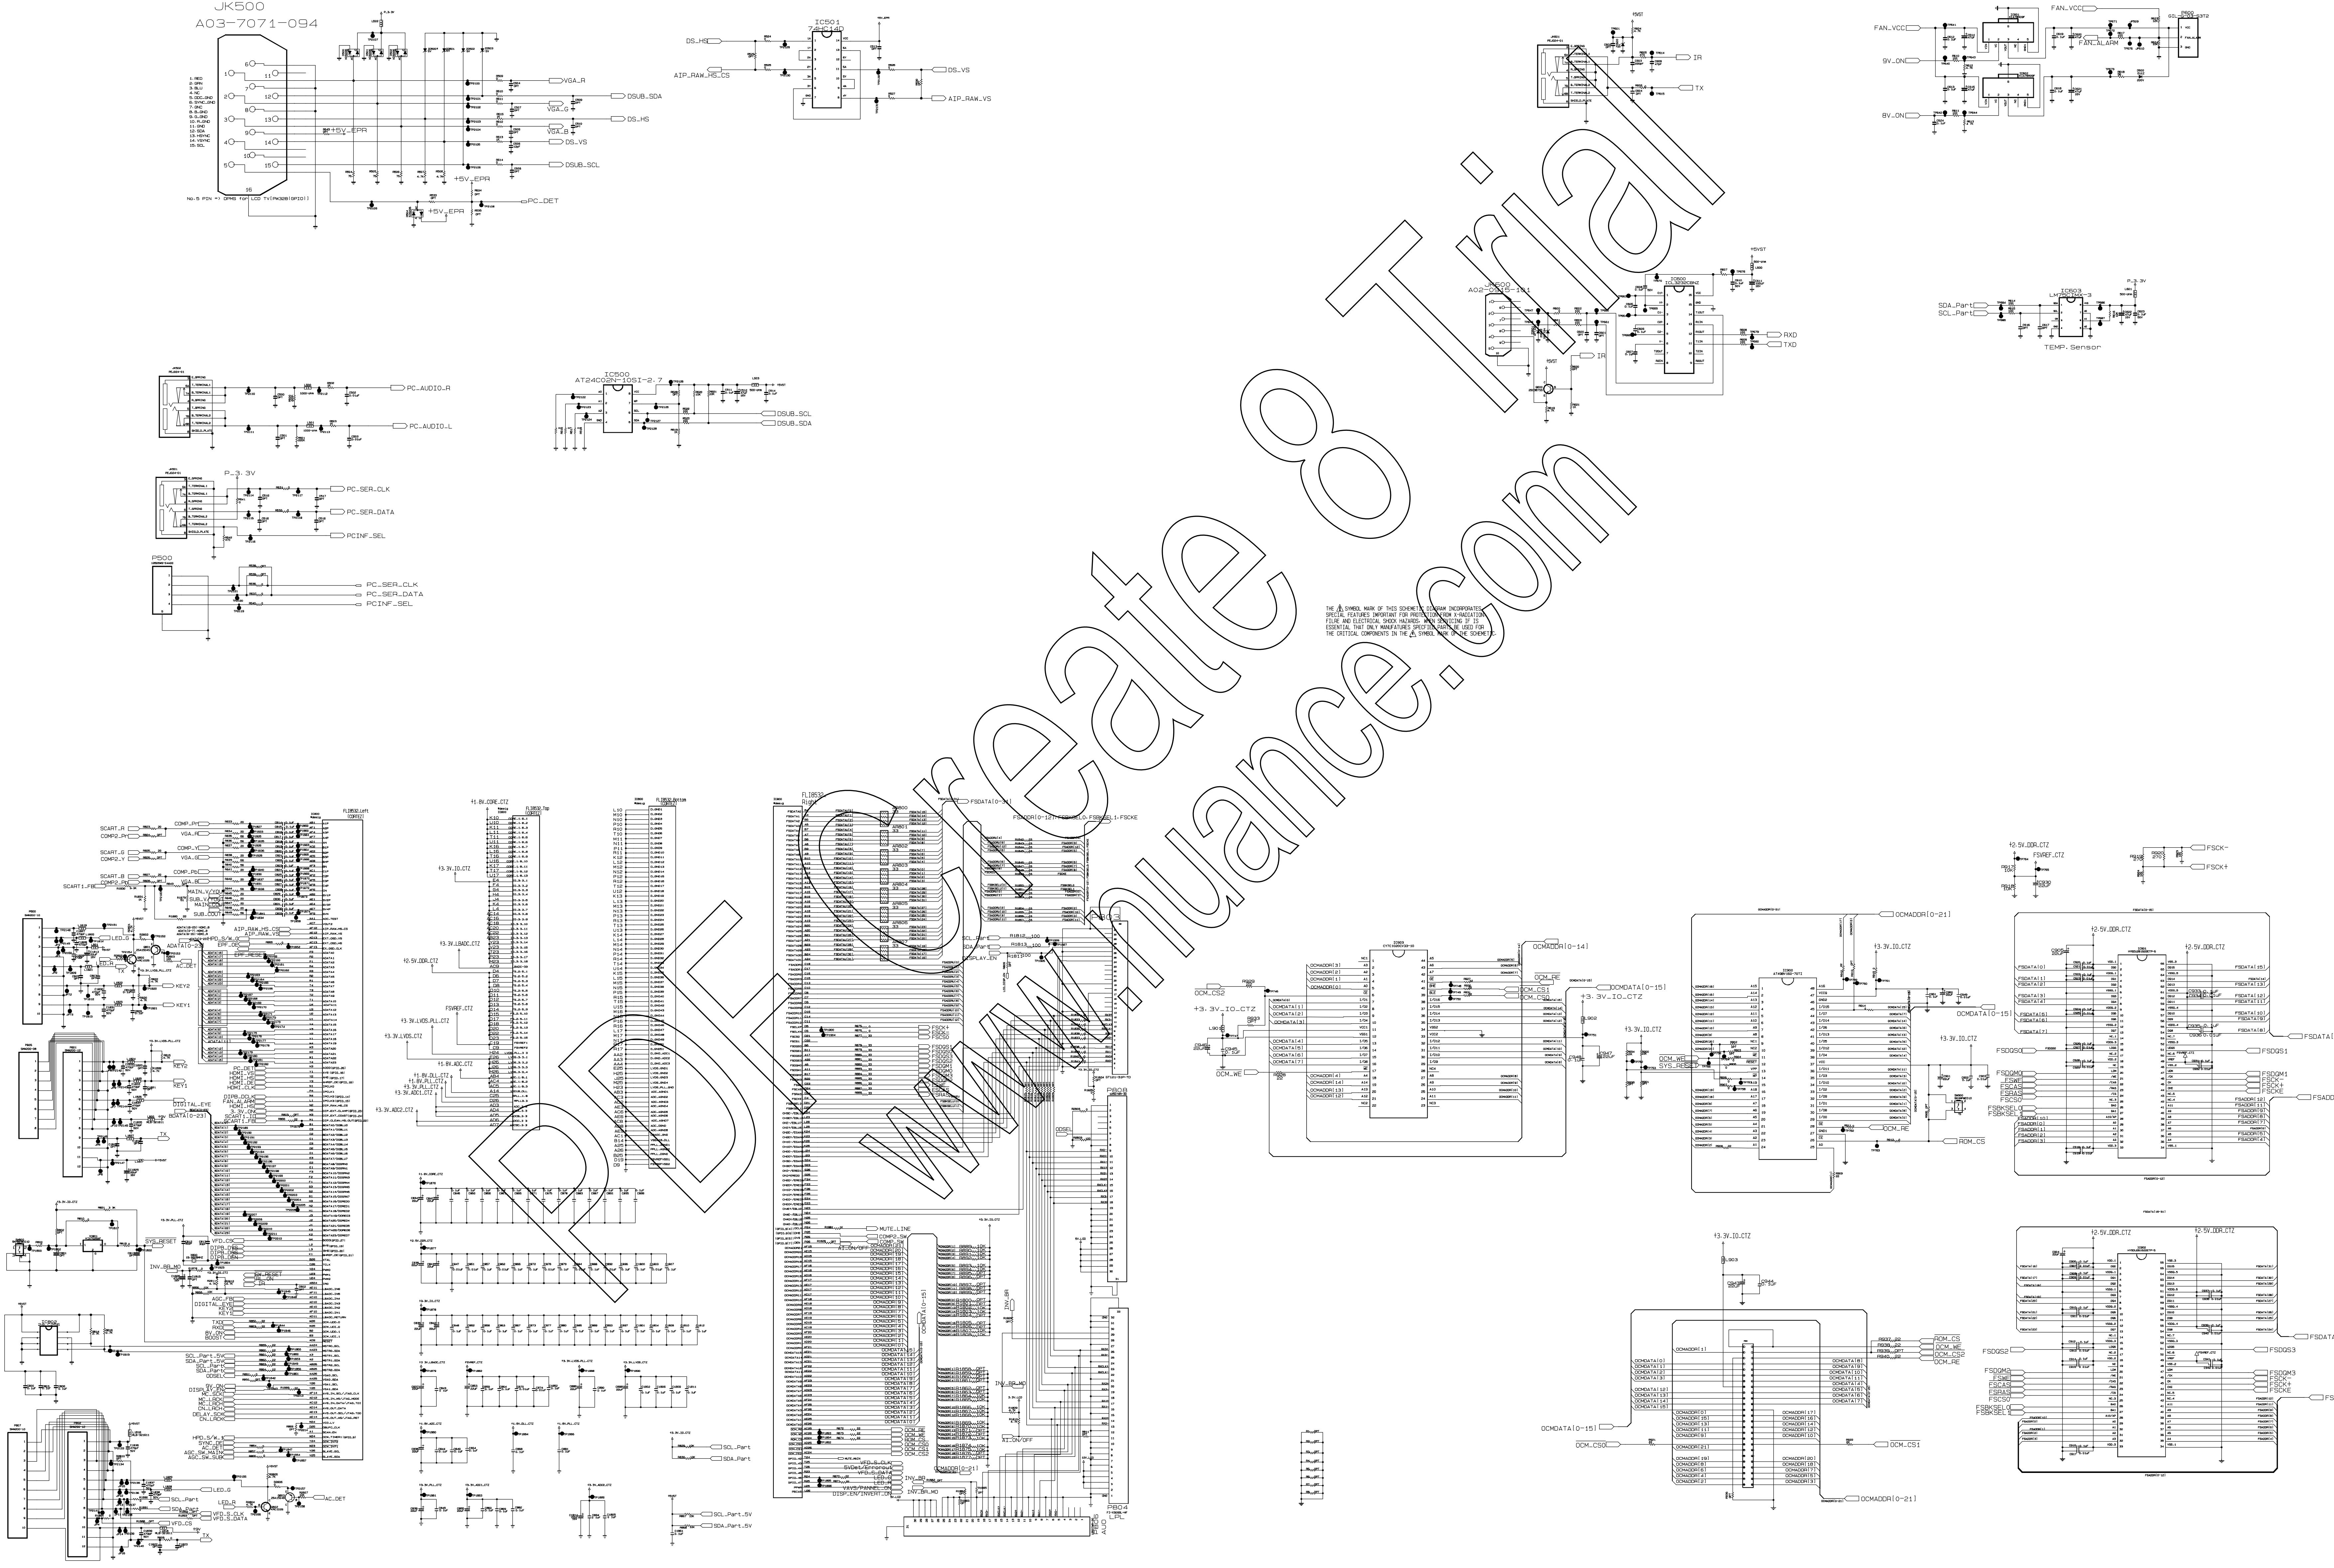

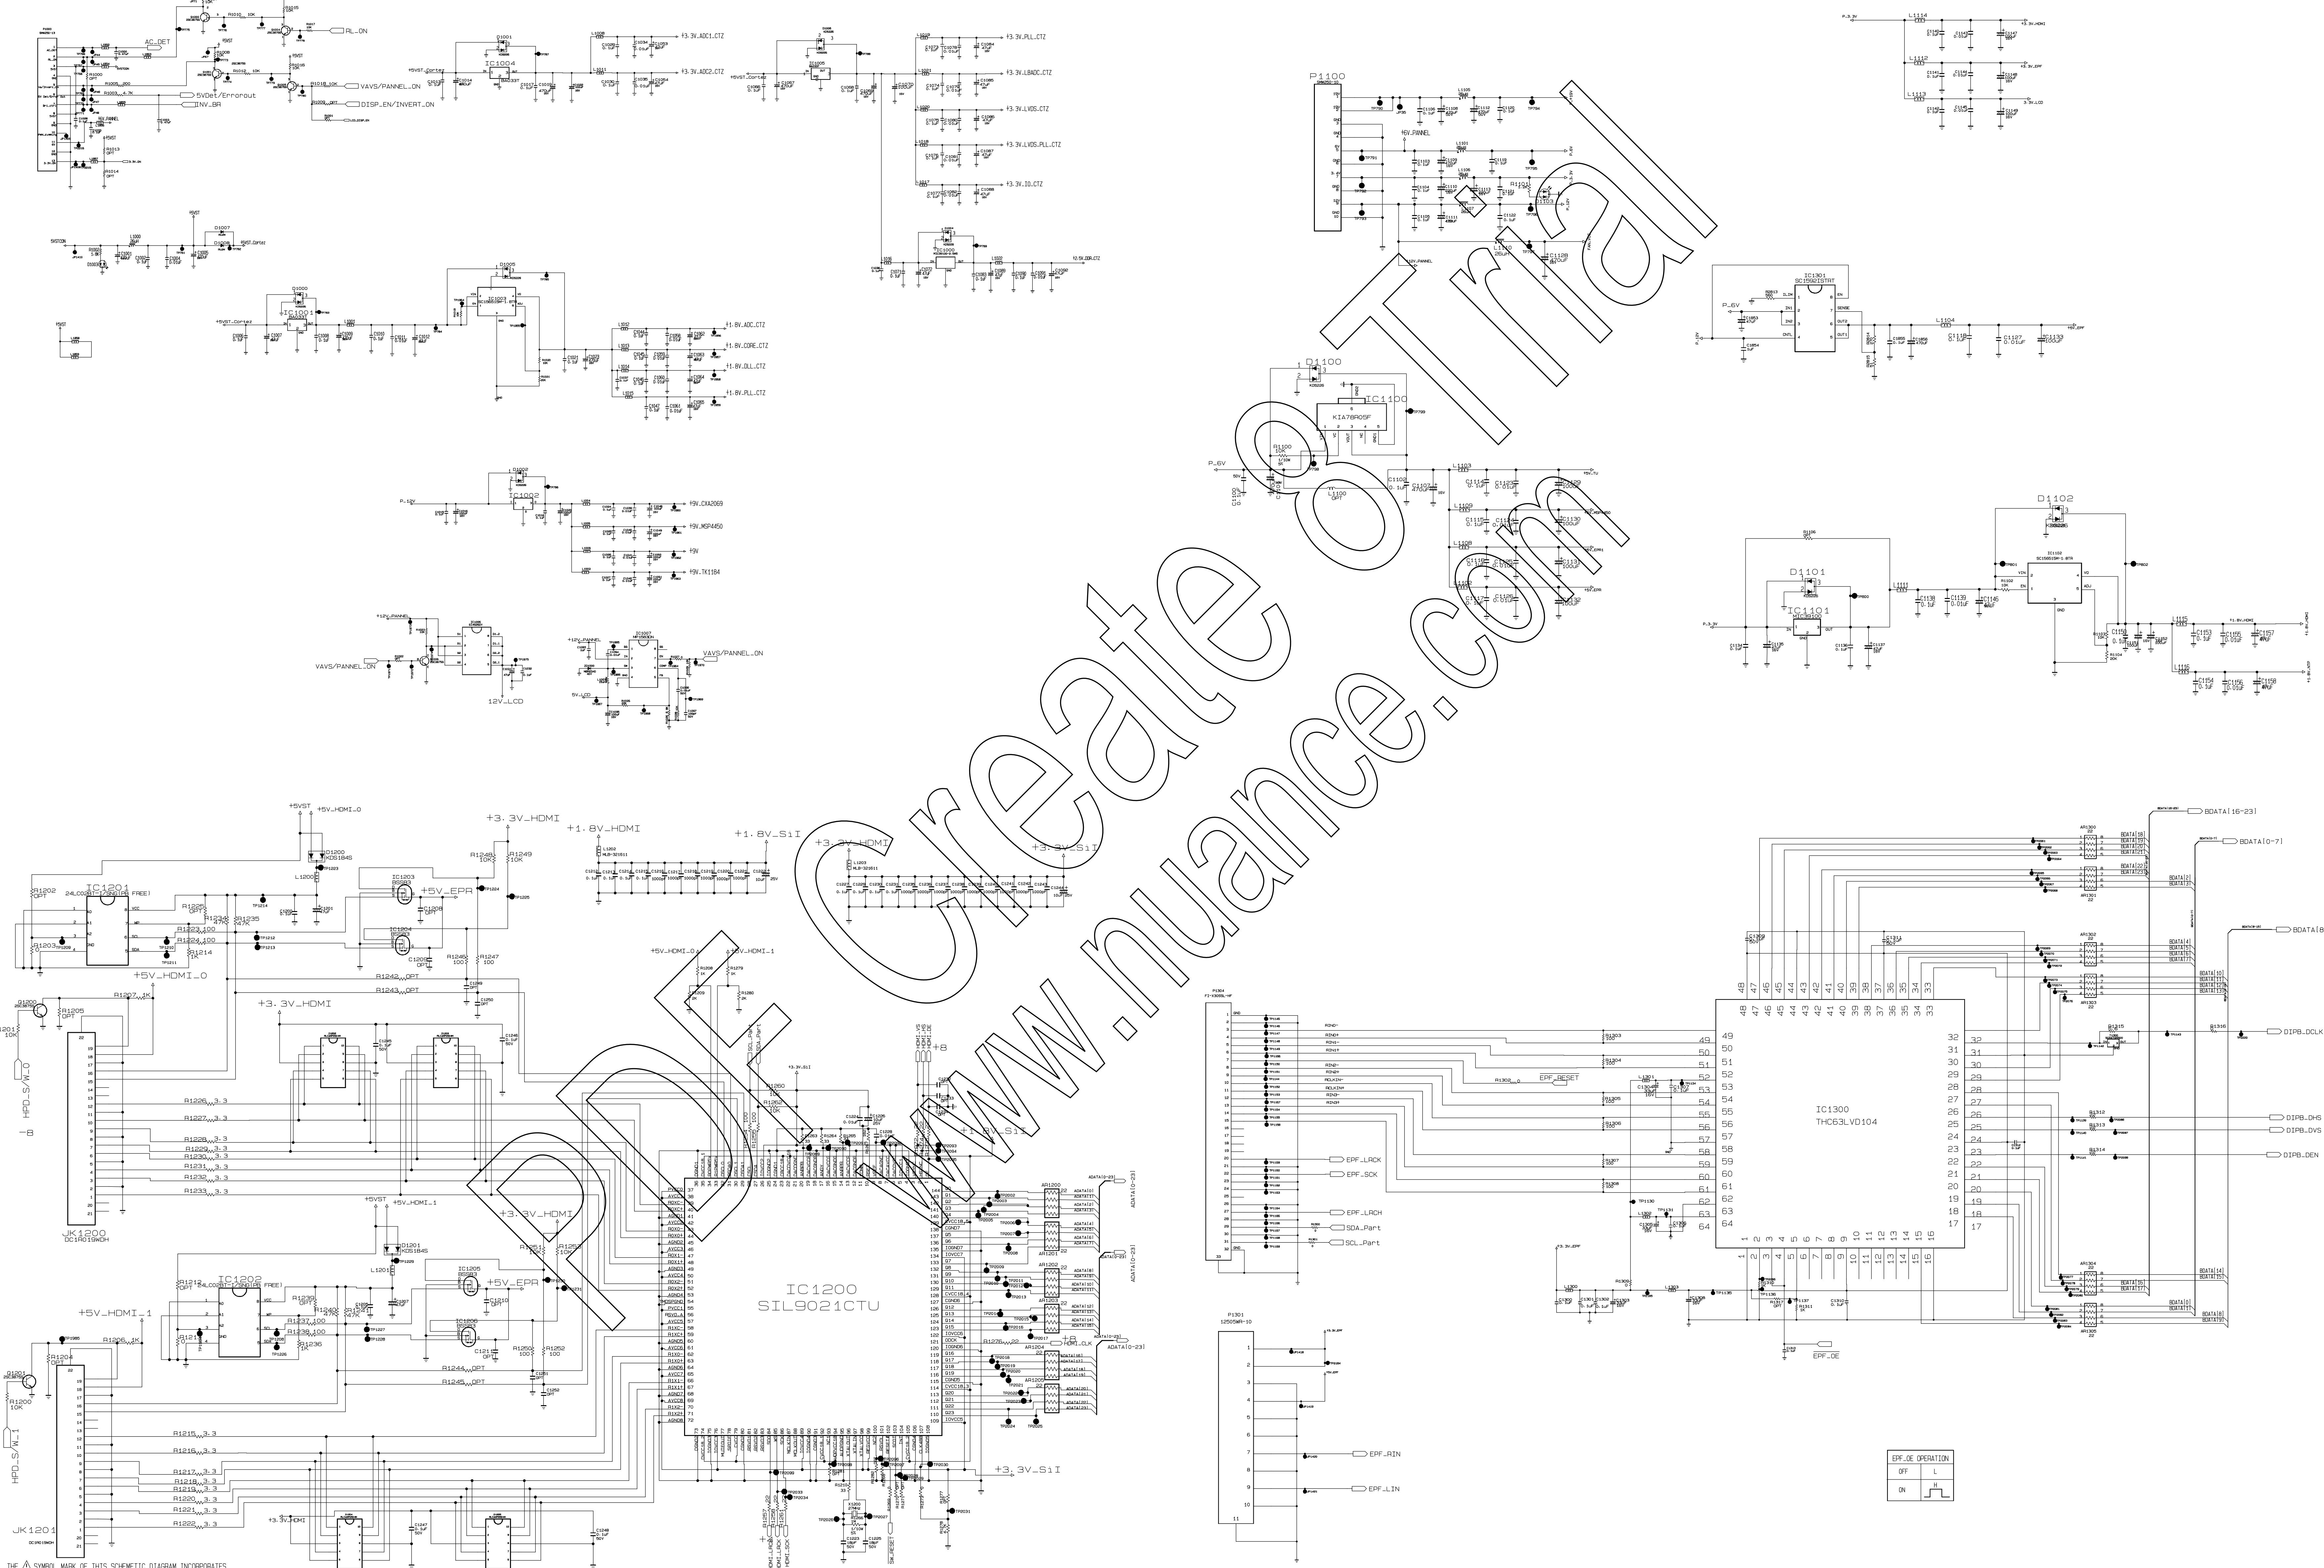

THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS. WHEN SERVICING IT IS ESSENTIAL THAT ONLY MANUFACTURED SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.

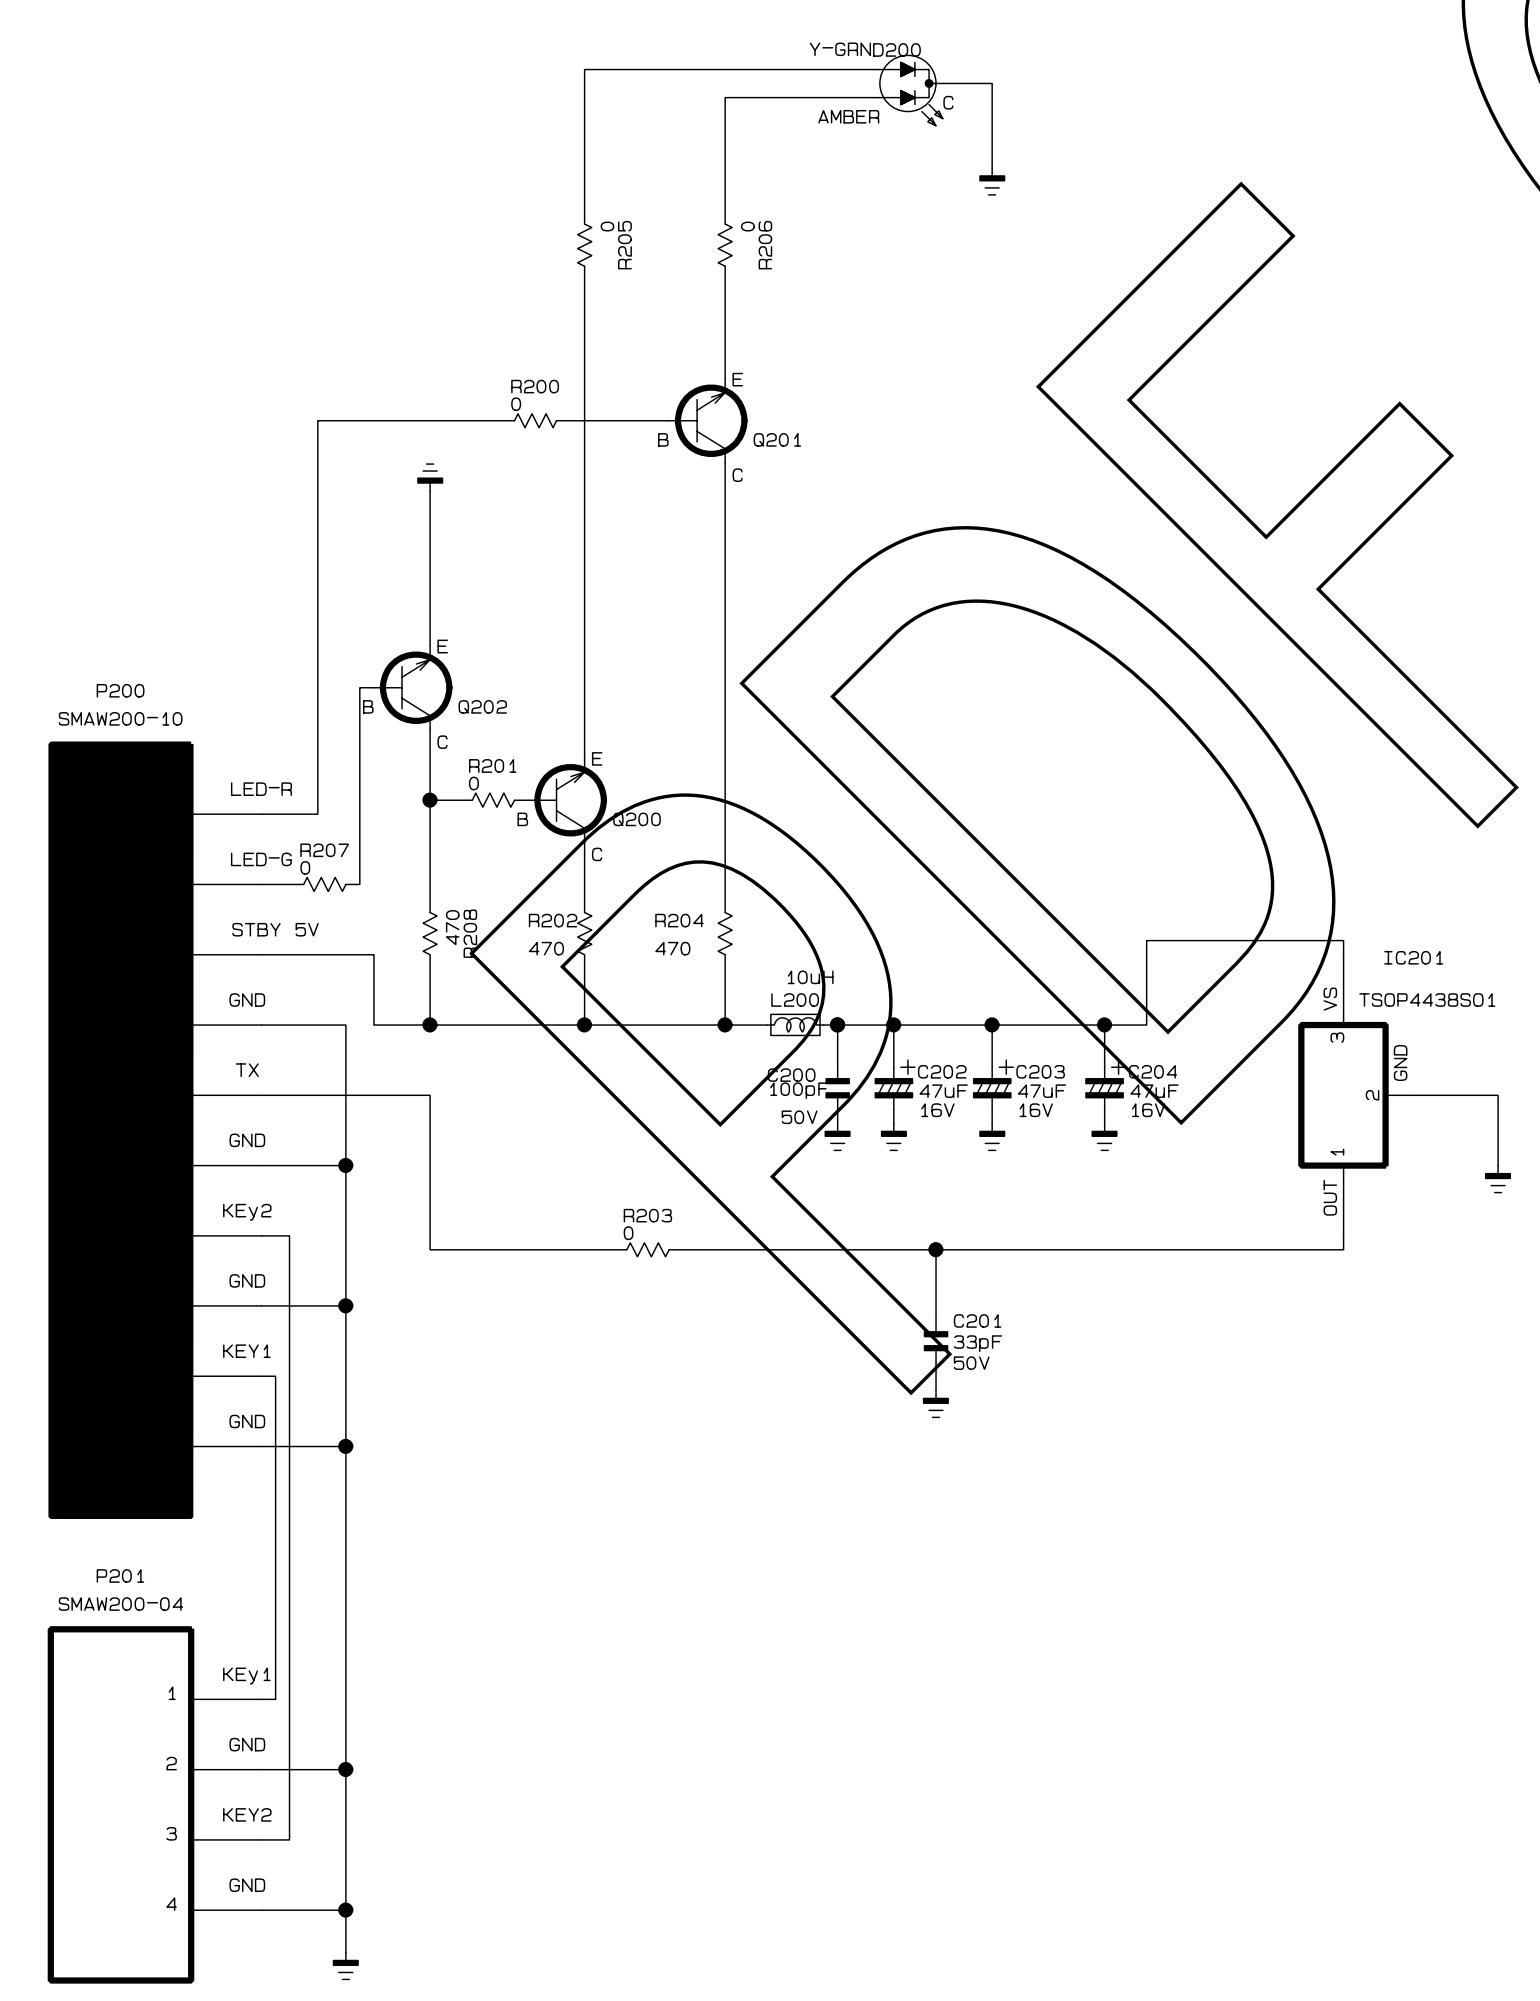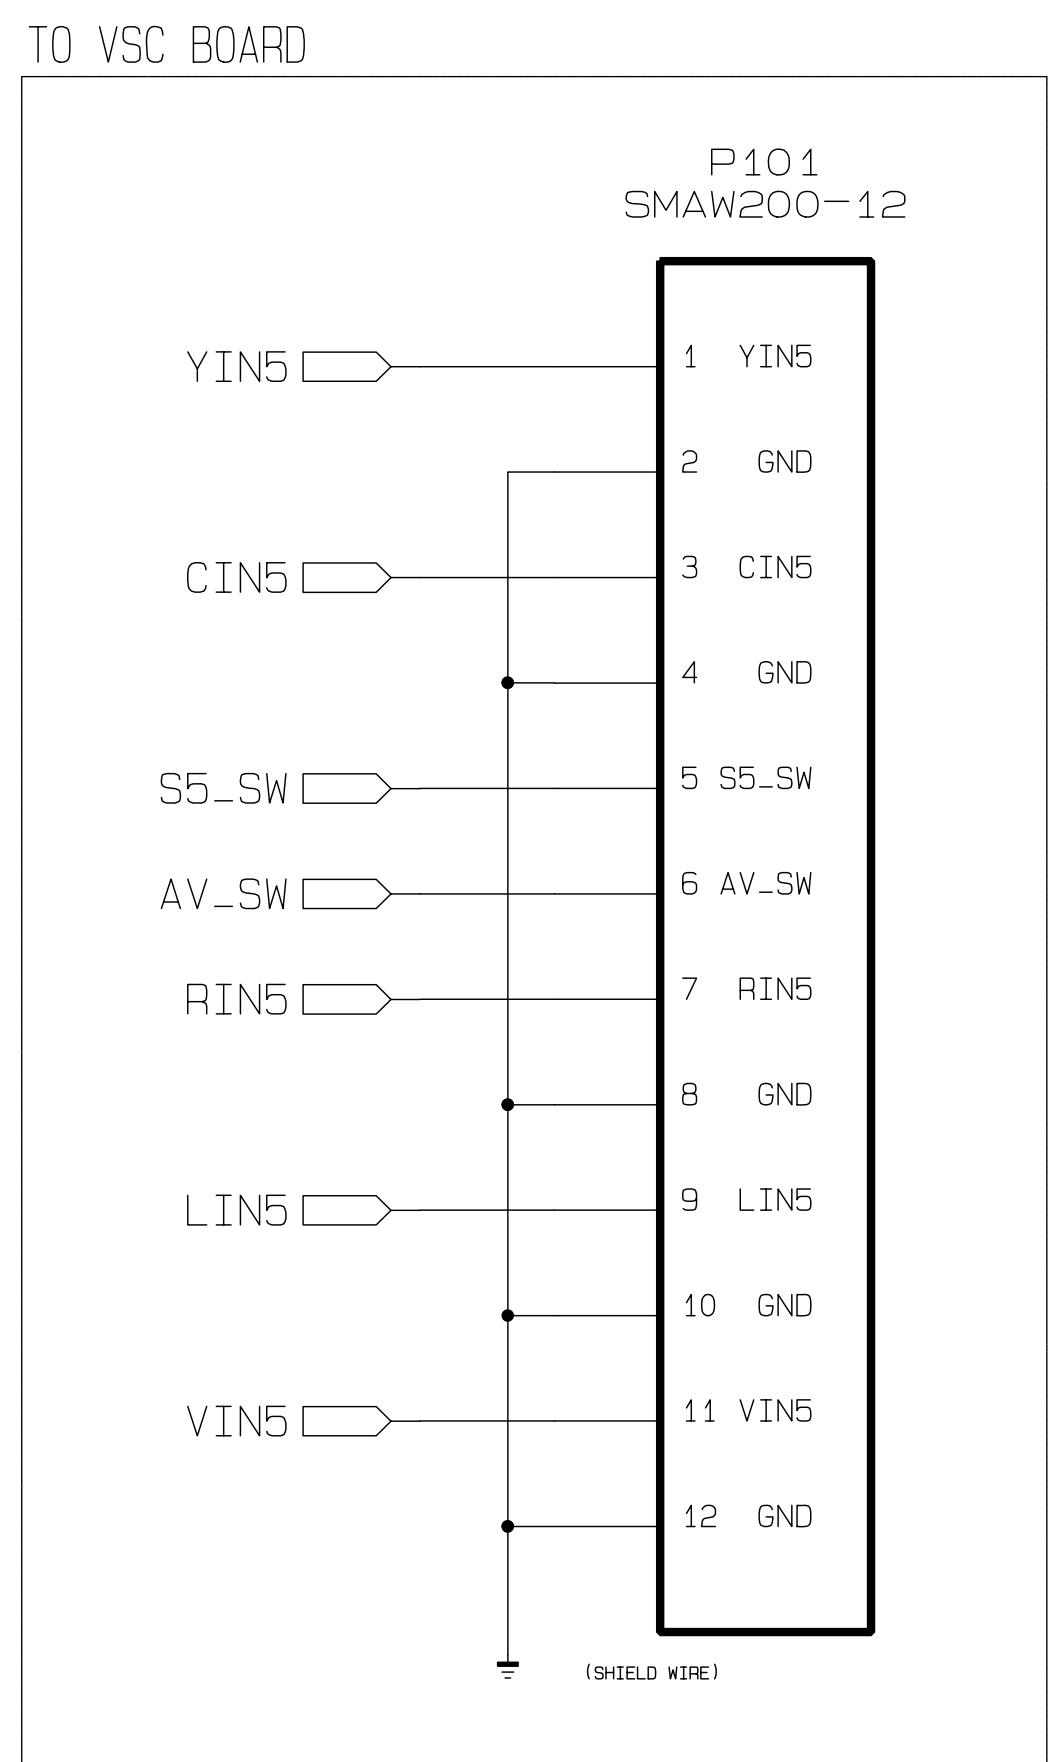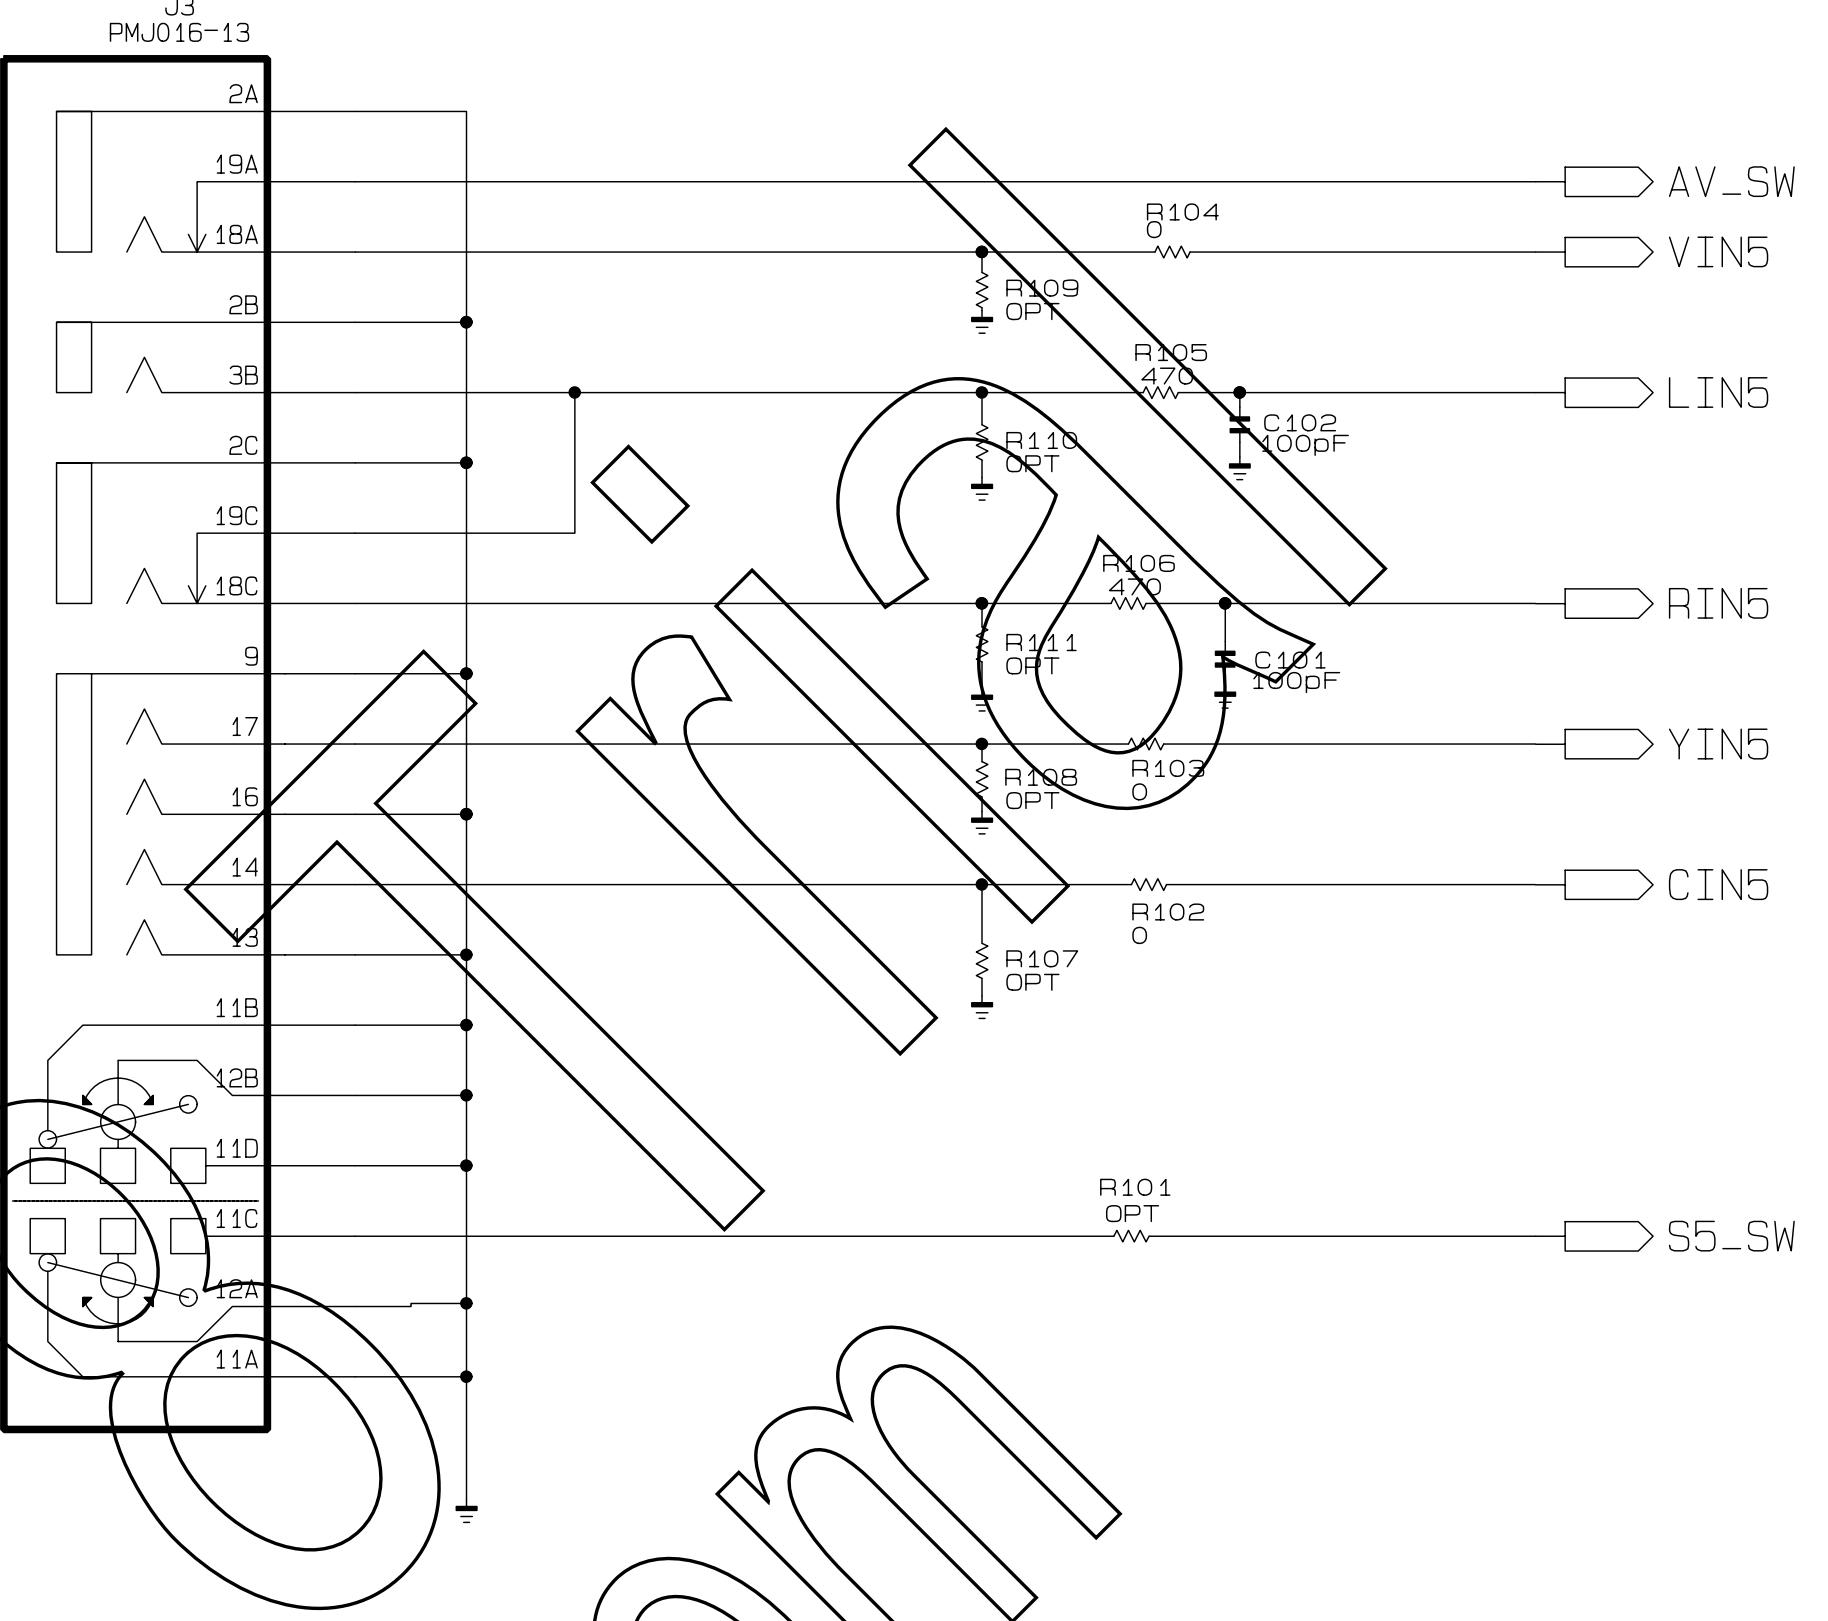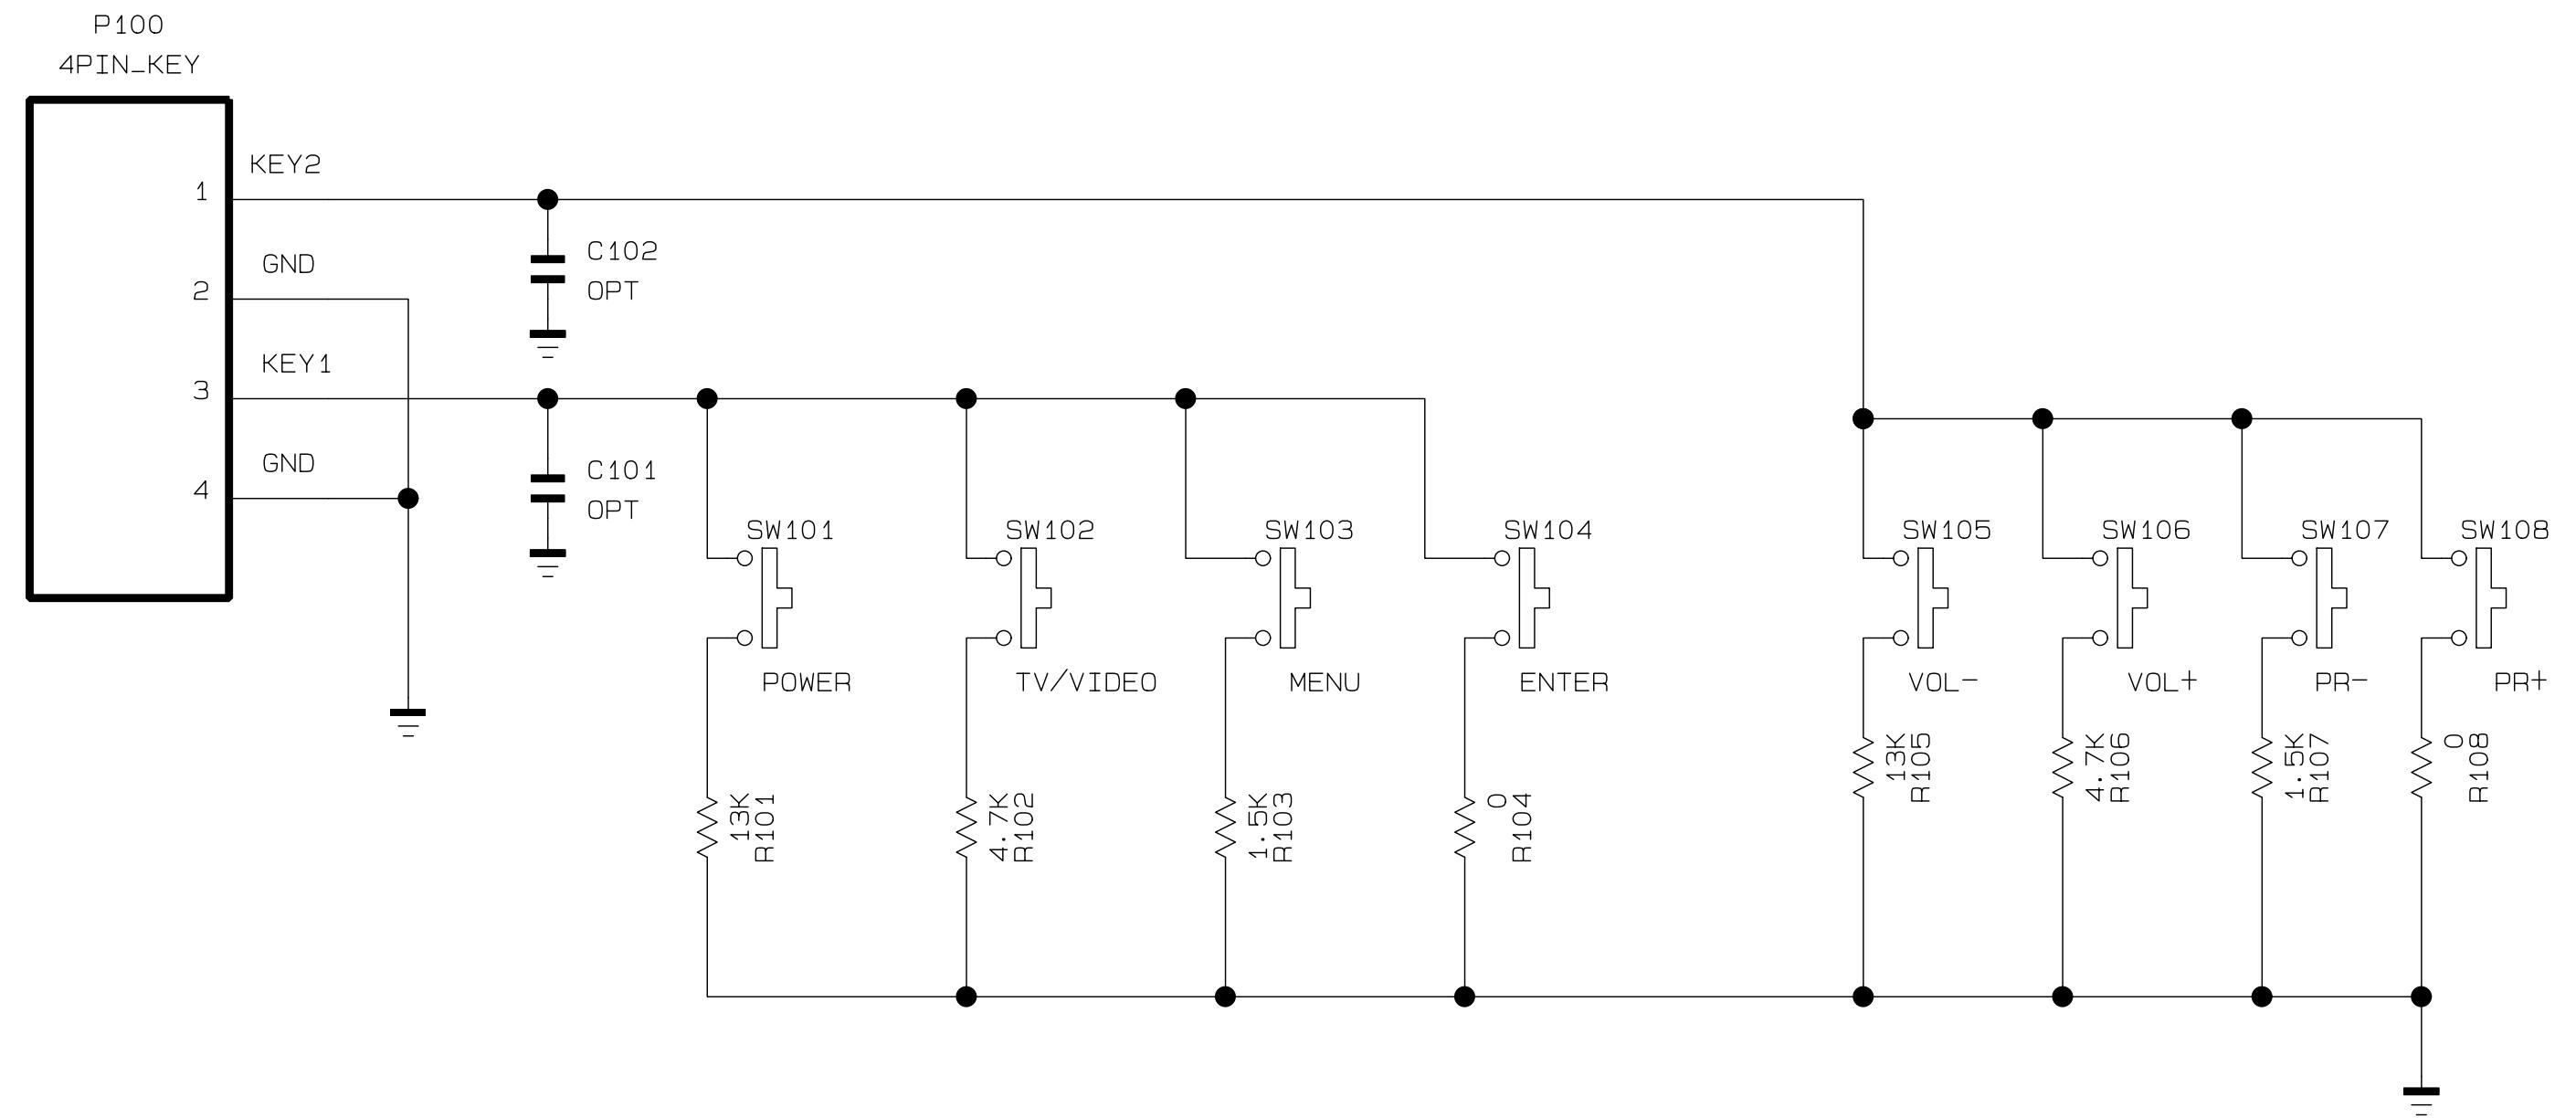

www.nuanche.com

THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION, FIRE AND ELECTRICAL SHOCK HAZARDS. WHEN SERVICING IT IS ESSENTIAL THAT ONLY MANUFACTURER-SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.

P/NQ MFL30105507



LG Electronics Inc.

PDF Create & Trial
www.nuance.com

Mar., 2006
Printed in Korea