

FEATURES AND SPECIFICATIONS

Features and Benefits

- Solderable fitting nail provides retention to PCB
- Fully polarized to mating receptacle
- Tape and reel packaging eliminates handling and provides higher insertion speeds compared to tray packing or hand assembly

Reference Information

Product Specification: PS-43045
 Packaging: Tape and reel
 UL File No.: E29179
 CSA File No.: LR19980
 Mates With: [43025](#)
 Designed In: Millimeters

Electrical

Voltage: 250V
 Current: 5.0A max.
 Contact Resistance: 10mΩ max.
 Dielectric Withstanding Voltage: 1500V AC
 Insulation Resistance: 1000 MΩ min.

Physical


Housing: High temperature LCP, UL 94V-0
 Contact: Brass
 Plating: Tin or Gold




**3.00mm (.118") Pitch
 Micro-Fit 3.0™
 Wire-to-Board
 Header**

43045

**Dual Row, Right Angle, SMT
 With Solderable Fitting Nail**

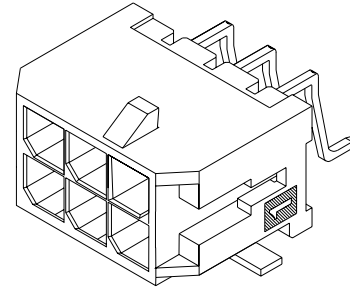

CATALOG DRAWING (FOR REFERENCE ONLY)

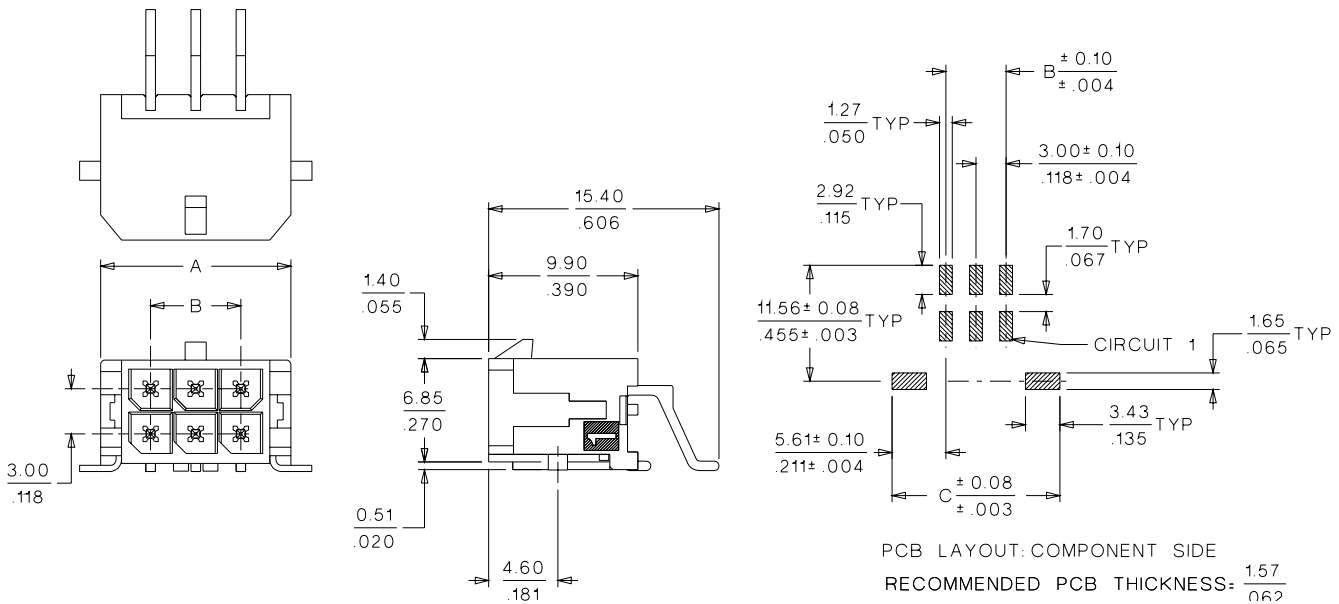

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.			Dimension		
	Tin	15μ" Gold	30μ" Gold	A	B	C
2	43045-0209	43045-0210	43045-0211	6.65 (.262)	3.00 (.118)	11.20 (.441)
4	43045-0409	43045-0410	43045-0411	9.65 (.380)	3.00 (.118)	14.20 (.559)
6	43045-0609	43045-0610	43045-0611	12.65 (.499)	3.00 (.118)	17.20 (.677)
8	43045-0809	43045-0810	43045-0811	15.65 (.616)	3.00 (.118)	20.20 (.795)
10	43045-1009	43045-1010	43045-1011	18.65 (.734)	3.00 (.118)	23.20 (.913)
12	43045-1209	43045-1210	43045-1211	21.65 (.852)	3.00 (.118)	26.20 (1.031)
14	43045-1409	43045-1410	43045-1411	24.65 (.970)	3.00 (.118)	29.20 (1.150)
16	43045-1609	43045-1610	43045-1611	27.65 (1.088)	3.00 (.118)	32.20 (1.268)
18	43045-1809	43045-1810	43045-1811	30.65 (1.206)	3.00 (.118)	35.20 (1.386)
20	43045-2009	43045-2010	43045-2011	33.65 (1.325)	3.00 (.118)	38.20 (1.504)
22	43045-2209	43045-2210	43045-2211	36.65 (1.443)	3.00 (.118)	41.20 (1.622)
24	43045-2409	43045-2410	43045-2411	39.65 (1.561)	3.00 (.118)	44.20 (1.740)