



ZXXS260-L02

## Product Information

DATE : 7. Oct. 2010

ZHIXUAN TFT-LCD  
MODEL : ZXXS260-L02

*The Information Described in this Specification is Preliminary and can be changed without prior notice*

LCD Business

ZHIXUAN Display Co.,Ltd

APPROVED BY <b>Kwang-soo Lee</b>	DATE 07.Oct.2010	PREPARED BY <b>Dong-Hyun Kim</b>	DATE 07.Oct.2010
-------------------------------------	---------------------	-------------------------------------	---------------------

## Contents

General Description .....	(3)
General Information .....	(3)
1. Absolute Maximum Ratings .....	(4)
2. Optical Characteristics .....	(5)
3. Electrical Characteristics .....	(8)
3.1 TFT LCD Module	
3.2 Back Light Unit	
3.3 Inverter Input & Specification	
4. Input Terminal Pin Assignment .....	(11)
4.1 Input Signal & Power	
4.2 Inverter Input Pin Configuration	
4.3 Inverter Input Power Sequence	
4.4 LVDS Interface	
4.5 Input Signals, Basic Display Colors and Gray Scale of Each Color	
5. Interface Timing .....	(16)
5.1 Timing Parameters (DE only mode)	
5.2 Spread Spectrum	
5.3 LVDS Input Data Position	
5.4 Timing diagrams of interface signal	
5.5 Power ON/OFF Sequence	
6. Outline Dimension .....	(19)
7. Packing .....	(21)
8. Marking & Others .....	(22)
9. General Precaution .....	(23)
9.1 Handling	
9.2 Storage	
9.3 Operation	
9.4 Operation Condition Guide	
9.5 Others	

## General Description

### Description

ZXXS260-L02 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT(Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a back light unit. The resolution of a 26.0" is 1366 x 768 and this model can display up to 16.7 million colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide a excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV and High Definition TV.

### Features

- RoHS compliance (Pb-free)
- High contrast & aperture ratio with wide color gamut
- APVA( Advanced Patterned Vertical Align) mode
- Wide viewing angle ( $\pm 178^\circ$ )
- High speed response
- HD resolution (16:9)
- Low Power consumption
- U-Type 4 CCFLs (Cold Cathode Fluorescent Lamp)
- DE(Data Enable) mode
- LVDS (Low Voltage Differential Signaling) interface (1pixel/clock)

### Caution

- Only Landscape
- Must use under 8 hour
- Don't use still image

## General Information

Items	Specification	Unit	Note
Module Size	626.0(H <sub>TYP</sub> ) x 373.0(V <sub>TYP</sub> )	mm	±1.0mm
Weight	48.6(D <sub>MAX</sub> )	g	Max
Pixel Pitch	5,500 (Max)	mm	
Active Display Area	0.4215(H) x 0.4215(V)	mm	
Surface Treatment	575.769(H) x 323.712(V)		
Display Colors	Antiglare , Hard-coating (3H)	colors	
Number of Pixels	8 bit - 16.7M	pixel	
Pixel Arrangement	1366 x 768		
Display Mode	RGB Horizontal stripe		
Luminance of White	1000	cd/m <sup>2</sup>	

## 1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	$V_{DD}$	GND-0.5	13.2	V	(1)
Dimming control	Max. Lum	-	5	V	(1)
Storage temperature	$T_{STG}$	-20	60	°C	(2)
Surface temperature	$T_{SUR}$	0	60	°C	(3)
Operation temperature	$T_{OPR}$	0	50	°C	(2)
Shock ( non - operating )	$S_{nop}$	-	50	G	(4)
Vibration ( non - operating )	$V_{nop}$	-	1.5	G	(5)

Note (1)  $T_a = 25 \pm 2 \text{ }^\circ\text{C}$

(2) Temperature and relative humidity range are shown in the figure below.

a. 90 % RH Max. ( $T_a \leq 39 \text{ }^\circ\text{C}$ )

b. Relative Humidity is 90% or less. ( $T_a > 39 \text{ }^\circ\text{C}$ )

c. No condensation

(3) Although abnormal visual problems can be occurred in  $T_{sur}$  range, the polarizer is not damaged in this range.

(4) 11ms, sine wave, one time for  $\pm X, \pm Y, \pm Z$  axis

(5) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis

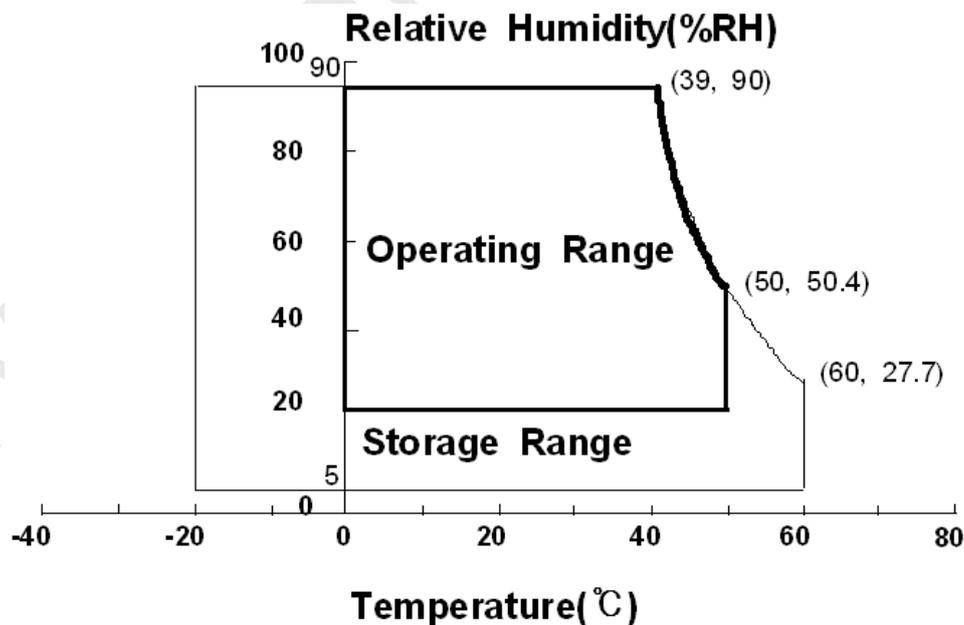


Fig. Temperature and Relative humidity range

## 2. Optical Characteristics

The optical characteristics should be measured in a dark room or equivalent.

Measuring equipment : TOPCON RD-80S, TOPCON SR-3, ELDIM EZCONTRAST

( $T_a = 25 \pm 2^\circ\text{C}$ ,  $V_{DD}=12.0\text{V}$ ,  $f_v=60\text{Hz}$ ,  $f_{DCLK}=78\text{MHz}$ , Dimming = Max )


Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note	
Contrast Ratio (Center of screen)	C/R	Normal $\theta_{L,R}=0$ $\theta_{U,D}=0$  Viewing Angle	3000	4000	-		(1) SR-3	
Response Time	G-to-G		Tg	-	8	-	msec	(3) RD-80S
Luminance of White (Center of screen)	$Y_L$			350	1000	-	cd/m <sup>2</sup>	(4) SR-3
Color Chromaticity (CIE 1931)	Red		Rx	TYP. -0.03	0.646	TYP. +0.03		(5),(6) SR-3
			Ry		0.337			
	Green		Gx		0.283			
			Gy		0.597			
	Blue		Bx		0.146			
			By		0.071			
	White		Wx		0.280			
		Wy	0.290					
Color Gamut	-	-	72	-	%	(5) SR-3		
Color Temperature	-	-	10,000	-	K	(5) SR-3		
Viewing Angle	Hor.	$\theta_L$	C/R $\geq$ 10	75	89	-	Degree	(6) EZ-Contrast
		$\theta_R$		75	89	-		
	Ver.	$\theta_U$		75	89	-		
		$\theta_D$		75	89	-		
Brightness Uniformity (9 Points)	$B_{uni}$	-	-	25	%	(2) SR-3		

### - Test Equipment Setup


The measurement should be executed in a stable, windless and dark room between 40min and 60min after lighting the back light at the given temperature for stabilization of the back light. This should be measured in the center of screen.

Environment condition :  $T_a = 25 \pm 2^\circ\text{C}$

Photo detector	Field
SR-3	2°
RD-80S	1°

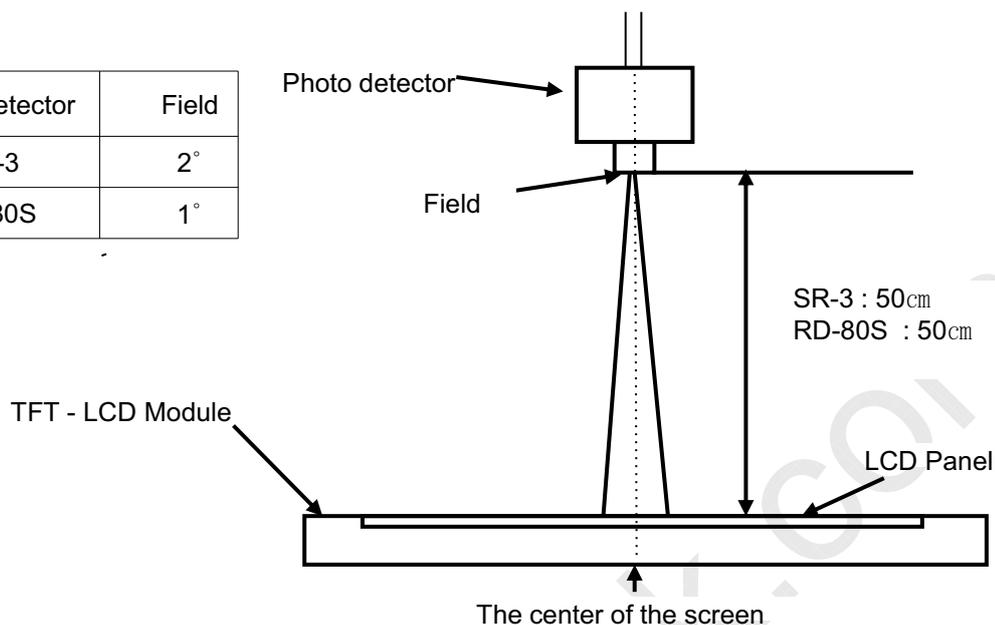

- Definition of test point

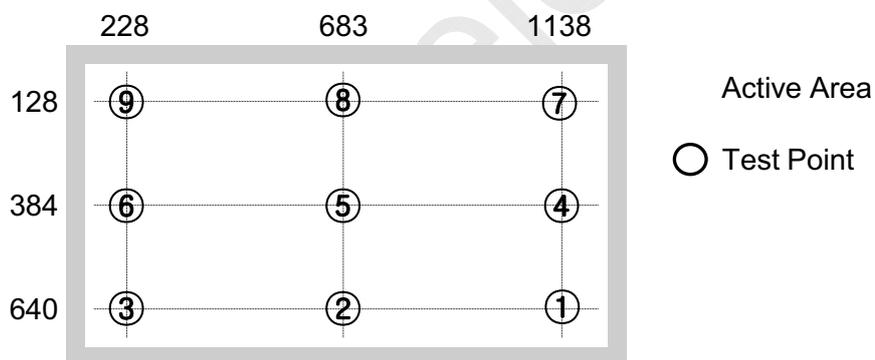

Note (1) Definition of Contrast Ratio (C/R)

: Ratio of gray max (Gmax) & gray min (Gmin) at the center point ⑤ of the panel

$$C/R = \frac{G_{max}}{G_{min}}$$

Gmax : Luminance with all pixels white

Gmin : Luminance with all pixels black


Note (2) Definition of 9 points brightness uniformity ( Test Pattern : Full White )

$$B_{uni} = 100 * \frac{(B_{max} - B_{min})}{B_{max}}$$

Bmax : Maximum brightness

Bmin : Minimum brightness

Note (3) Definition of Response time : Sum of Tr, Tf

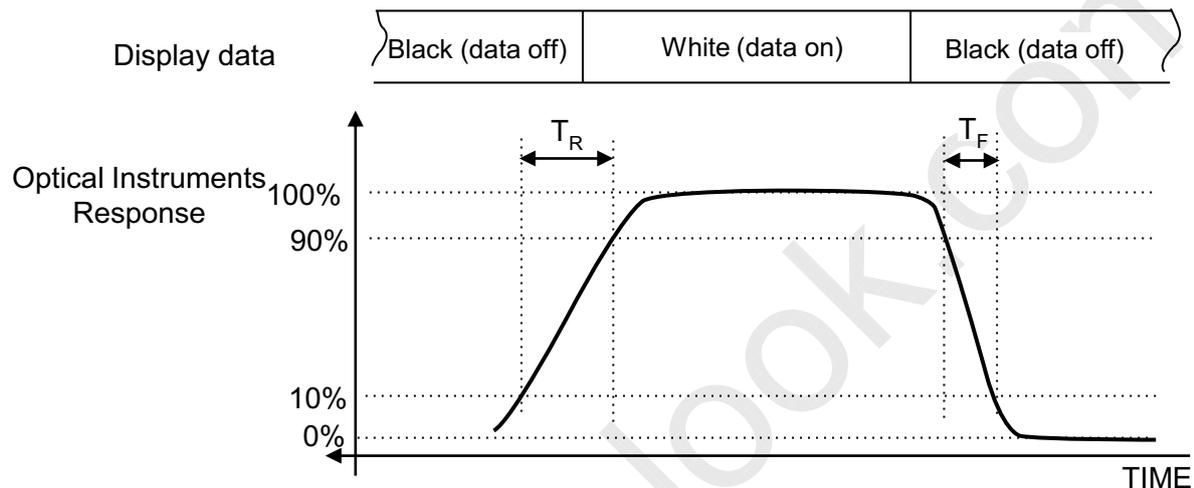


Note (4) Definition of Luminance of White : Luminance of white at center point ⑤

Note (5) Definition of Color Chromaticity (CIE 1931)

Color coordinate of Red, Green, Blue & White at center point ⑤

Note (6) Definition of Viewing Angle

: Viewing angle range (C/R ≥ 10)

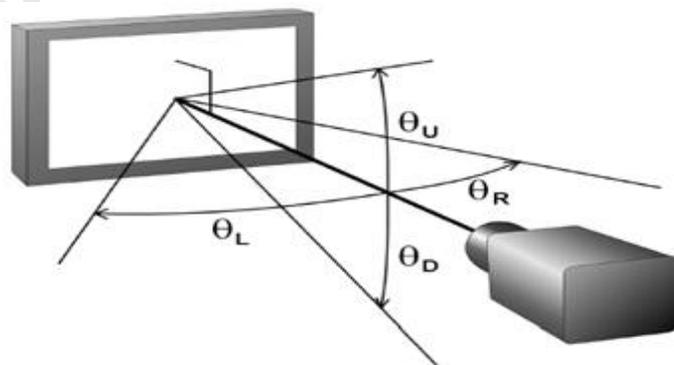

### 3. Electrical Characteristics

#### 3.1 TFT LCD Module

The connector for display data & timing signal should be connected.

$T_a = 25^\circ\text{C} \pm 2^\circ\text{C}$


Item	Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply	$V_{DD}$	10.8	12.0	13.2	V	(1)
Current of Power Supply	(a) Black	-	313	-	mA	(2),(3)
	(b) White	-	305	-	mA	
	(c) N-Pattern	-	559	659	mA	
Vsync Frequency	$f_V$	48	60	66	Hz	
Hsync Frequency	$f_H$	44	48	53	kHz	
Main Frequency	$f_{DCLK}$	72	78	85	MHz	
Rush Current	$I_{RUSH}$	-	-	4	A	(4)

Note (1) The ripple voltage should be controlled under 10% of  $V_{DD}$ .

(2)  $f_V=60\text{Hz}$ ,  $f_{DCLK} = 78\text{ MHz}$ ,  $V_{DD} = 12.0\text{V}$ , DC Current.

(3) Power dissipation check pattern (LCD Module only)



a) Black Pattern




b) White Pattern



c) N-Pattern



(4) Measurement Conditions

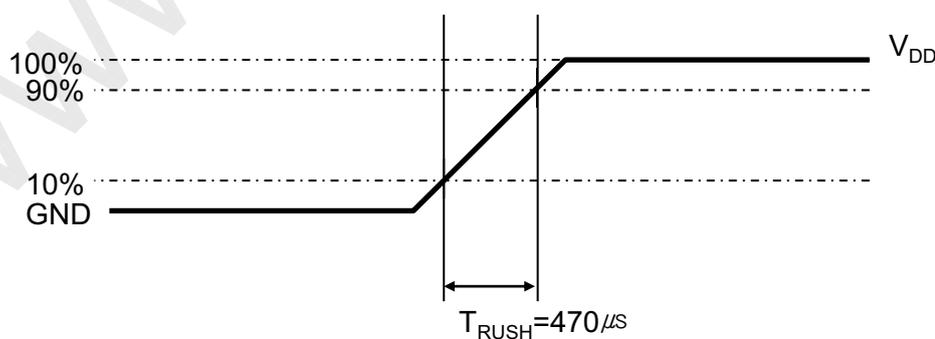


Rush Current  $I_{RUSH}$  can be measured when  $T_{RUSH}$  is  $470\mu\text{s}$ .

### 3.2 Back Light Unit

The back light unit contains 4 direct-lighting U-type CCFLs ( Cold Cathode Fluorescent Lamp ).

$T_a = 25 \pm 2^\circ\text{C}$

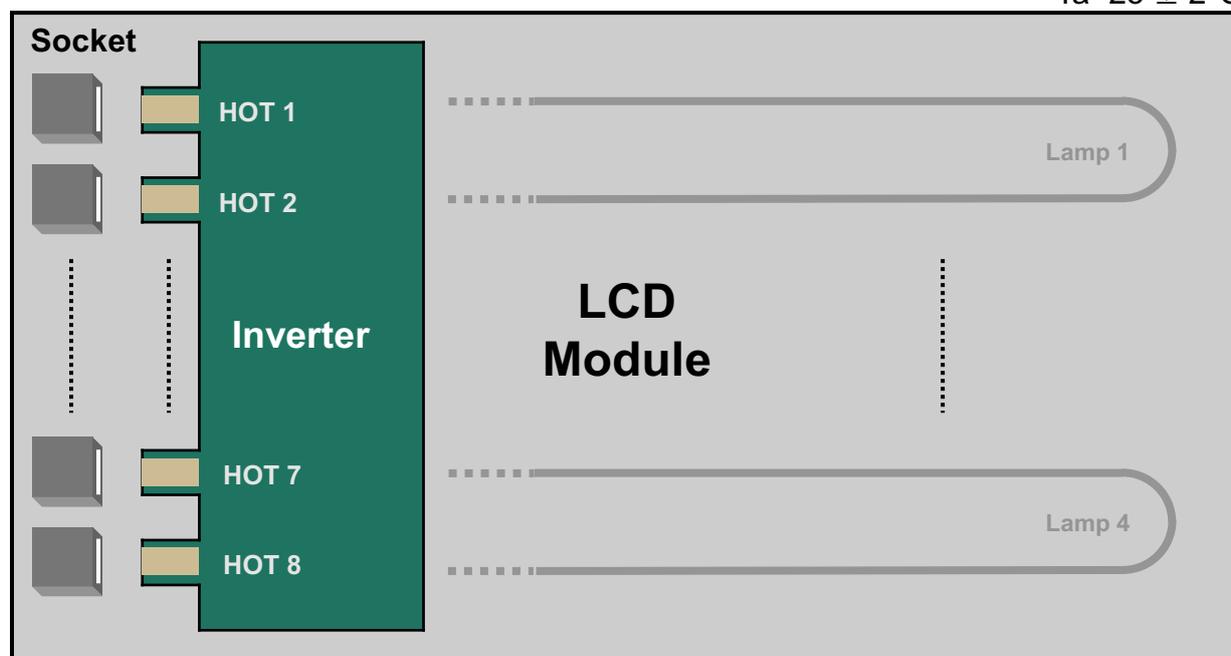

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Life Time	Hr	50,000	-	-	Hour	(1)

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value.

[Operating condition :  $T_a = 25 \pm 2^\circ\text{C}$ , For single lamp only. ]

### 3.3 Inverter Input Condition & Specification


Items	Symbol	Conditions	Specifications			Unit	Note
			Min.	Typ.	Max.		
Input Voltage	V <sub>in</sub>	-	22	24	26	V	Ta=25±2 °C (3)
Input Current	I <sub>in</sub>	V <sub>in</sub> =24.0V V <sub>dim</sub> =3.3V		2.4		Adc	(1)
Frequency	F <sub>LAMP</sub>	V <sub>in</sub> =24.0 V	60	62	64	kHz	After 2 Hours Warm-Up @V <sub>in</sub> =24V
Lamp current	I <sub>o</sub>	V <sub>in</sub> =24.0V V <sub>dim</sub> =3.3V	11.5	12.0	12.5	mArms	
Backlight On/Off	ON	V <sub>in</sub> =24.0 V	2.4	-	5.25	V	(3)
	OFF	V <sub>in</sub> =24.0 V	0	-	0.8		
PWM dimming	F <sub>PMD</sub>	V <sub>in</sub> =24.0V, V <sub>dim</sub> =3.3V	140	150	160	Hz	-
Dimming Control	V <sub>DIM</sub>	Max Lum	3.3	-	-	V	(3)
		Min. Lum	-	-	0		

Note) Power Consumption is measured when 450 [cd/m ] of luminance which is the typical luminance.

Lamp Current is measured at the point before Lamp.

- (1) Max Value of the Power Consumption is measured during initial turn on time\* of the backlight
- (2) Max Value of the Power Consumption is measured after 60 min warm-up.
- (3) The ripple voltage should be controlled under 10% of Input Signal
- (4) Duty = On/(On+Off) \* 100

\* Initial turn-on time : From 0sec to 60min after turn-on

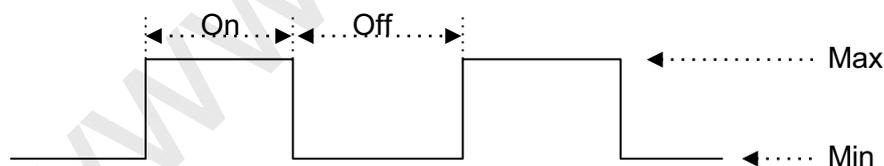

## 4. Input Terminal Pin Assignment

### 4.1. Input Signal & Power


Connector : IS100-L300-C23 (UJU) or Compatible

PIN No.	Description	PIN No.	Description
1	No Connection (Note 1)	16	GND
2	No Connection	17	RxIN3-
3	No Connection	18	RxIN3+
4	GND	19	GND
5	RxIN0-	20	No Connection
6	RxIN0+	21	LVDS OPTION (Note 2)
7	GND	22	No Connection
8	RxIN1-	23	GND
9	RxIN1+	24	GND
10	GND	25	No Connection
11	RxIN2-	26	Vin
12	RxIN2+	27	Vin
13	GND	28	Vin
14	RxCLK-	29	Vin
15	RxCLK+	30	Vin



Note)(1) No Connection: This PINS are only used for SAMSUNG internal using.

(2) LVDS OPTION : If this PIN : HIGH (3.3 V) → Normal LVDS format  
: LOW (GND) → JEIDA LVDS format

SEQUENCE : On =  $V_{DD}(T1) \geq \text{LVDS Option} \geq \text{Interface Signal}(T2)$   
OFF =  $\text{Interface Signal}(T3) \geq \text{LVDS Option} \geq V_{DD}$

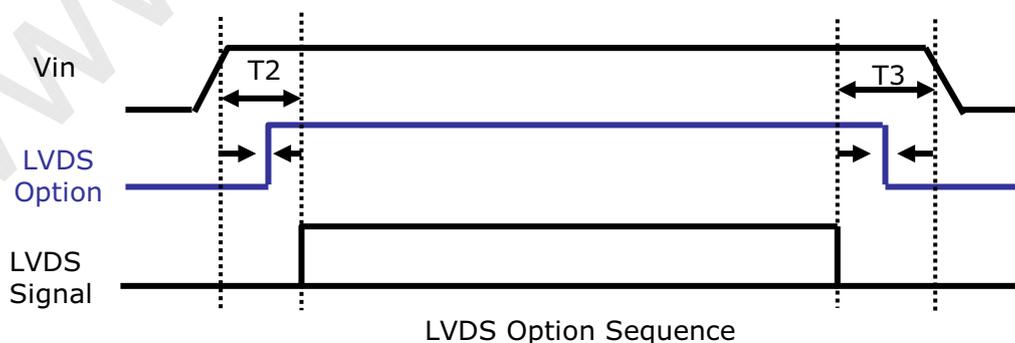

Note(3) Pin number starts from Right side

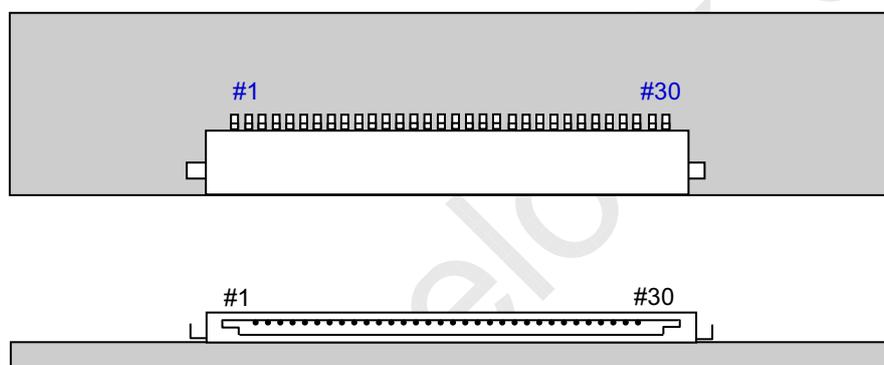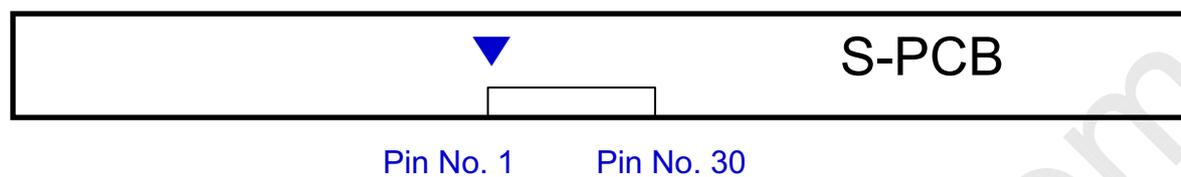

**Fig. Connector diagram**

- All GND pins should be connected together and also be connected to the LCD's metal chassis.
- All power input pins should be connected together.
- All NC pins should be separated from other signal or power.


## 4.2. Inverter Input Pin Configuration

Connector : 20022WR-14AML (Yeon-ho)

Pin No.	Pin Configuration(FUNCTION)
1	24 V
2	24 V
3	24 V
4	24 V
5	24 V
6	GND
7	GND
8	GND
9	GND
10	GND
11	No Connection *Note(1)
12	Backlight On /Off [ON:2.4 - 5.25 V, OFF: 0 - 0.8 V]
13	Dimming Control [0V:Min, 3.3V:Max]
14	No Connection

Note(1) No Connection : SEC Internally Used

## 4.3. Inverter Input Power Sequence

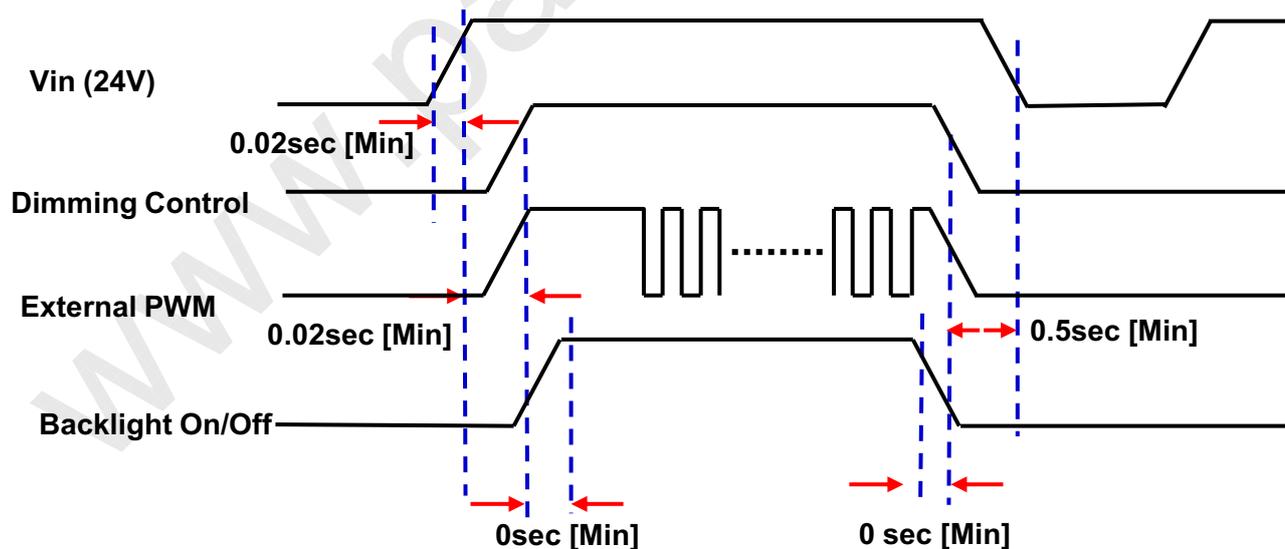

Note) SEQUENCE : On = Vin(24V) > Dimming Control ≥ Backlight On/off  
 OFF = Backlight On/Off ≥ Dimming Control > Vin(24V)

## 4.4 LVDS Interface

- LVDS Receiver : Tcon (merged)

- Data Format (JEIDA &amp; Normal)

	LVDS pin	JEIDA -DATA	Normal -DATA
TxOUT/RxIN0	TxIN/RxOUT0	R2	R0
	TxIN/RxOUT1	R3	R1
	TxIN/RxOUT2	R4	R2
	TxIN/RxOUT3	R5	R3
	TxIN/RxOUT4	R6	R4
	TxIN/RxOUT6	R7	R5
	TxIN/RxOUT7	G2	G0
TxOUT/RxIN1	TxIN/RxOUT8	G3	G1
	TxIN/RxOUT9	G4	G2
	TxIN/RxOUT12	G5	G3
	TxIN/RxOUT13	G6	G4
	TxIN/RxOUT14	G7	G5
	TxIN/RxOUT15	B2	B0
	TxIN/RxOUT18	B3	B1
TxOUT/RxIN2	TxIN/RxOUT19	B4	B2
	TxIN/RxOUT20	B5	B3
	TxIN/RxOUT21	B6	B4
	TxIN/RxOUT22	B7	B5
	TxIN/RxOUT24	HSYNC	HSYNC
	TxIN/RxOUT25	VSYNC	VSYNC
	TxIN/RxOUT26	DEN	DEN
TxOUT/RxIN3	TxIN/RxOUT27	R0	R6
	TxIN/RxOUT5	R1	R7
	TxIN/RxOUT10	G0	G6
	TxIN/RxOUT11	G1	G7
	TxIN/RxOUT16	B0	B6
	TxIN/RxOUT17	B1	B7
	TxIN/RxOUT23	RESERVED	RESERVED

### 4.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	DATA SIGNAL																								GRAY SCALE LEVEL
		RED							GREEN							BLUE										
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7	
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	-
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	-
	CYAN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	MAGENTA	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	-
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	-
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0	
	DARK ↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1	
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~R252	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~R252	
	LIGHT ↓	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R252	
		0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R252	
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R252	
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0	
	DARK ↑	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1	
		0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	G2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~G252	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~G252	
	LIGHT ↓	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	G252	
		0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	G252	
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	G252	
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0	
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	B1	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	B2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~B252	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~B252	
	LIGHT ↓	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	B252	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	B252	
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	B252	

Note) Definition of Gray :  
 Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)  
 Input Signal : 0 = Low level voltage, 1 = High level voltage

## 5. Interface Timing

### 5.1 Timing Parameters ( DE only mode )

SIGNAL	ITEM	SYMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Clock	Frequency	$1/T_C$	72	78	85	MHz	-
Hsync		$F_H$	44	48	53	KHz	-
Vsync		$F_V$	48	60	66	Hz	-
Vertical Active Display Term	Display Period	$T_{VD}$	-	768	-	lines	-
	Vertical Total	$T_V$	775	802	1200	lines	-
Horizontal Active Display Term	Display Period	$T_{HD}$	-	1366	-	clocks	-
	Horizontal Total	$T_H$	1460	1624	2000	clocks	-

Note) This product is DE only mode. The input of Hsync & Vsync signal does not have an effect on normal operation.

- (1) Test Point : TTL control signal and CLK at LVDS Tx input terminal in system  
 (2) Internal  $V_{DD} = 3.3V$

### 5.2 Spread Spectrum


- Modulation rate (max) :  $\pm 1.5\%$
- Modulation Frequency : under 300 KHz

### 5.3 LVDS Input Data Position

ITEM		SYMBOL	Min.	Typ.	Max.	UNIT	NOTE
Input Data Position	$F_{IN}=85MHz$	$t_{RSRM}$	-	-	400	Ps	-
	$F_{IN}=78MHz$		-	-	450	ps	
	$F_{IN}=72MHz$		-	-	500	ps	
Input Data Position	$F_{IN}=85MHz$	$t_{RSLM}$	-400	-	-	ps	
	$F_{IN}=78MHz$		-450	-	-	ps	
	$F_{IN}=72MHz$		-500	-	-	ps	
Input common mode voltage		$V_{CM}$	0.3	-	1.8	V	-
Differential Input Voltage		$ V_{ID} $	200	350	600	mV	-


Note) When the skew is measured the Spread Spectrum should be 0%

## 5.4 Timing diagrams of interface signal ( DE only mode )

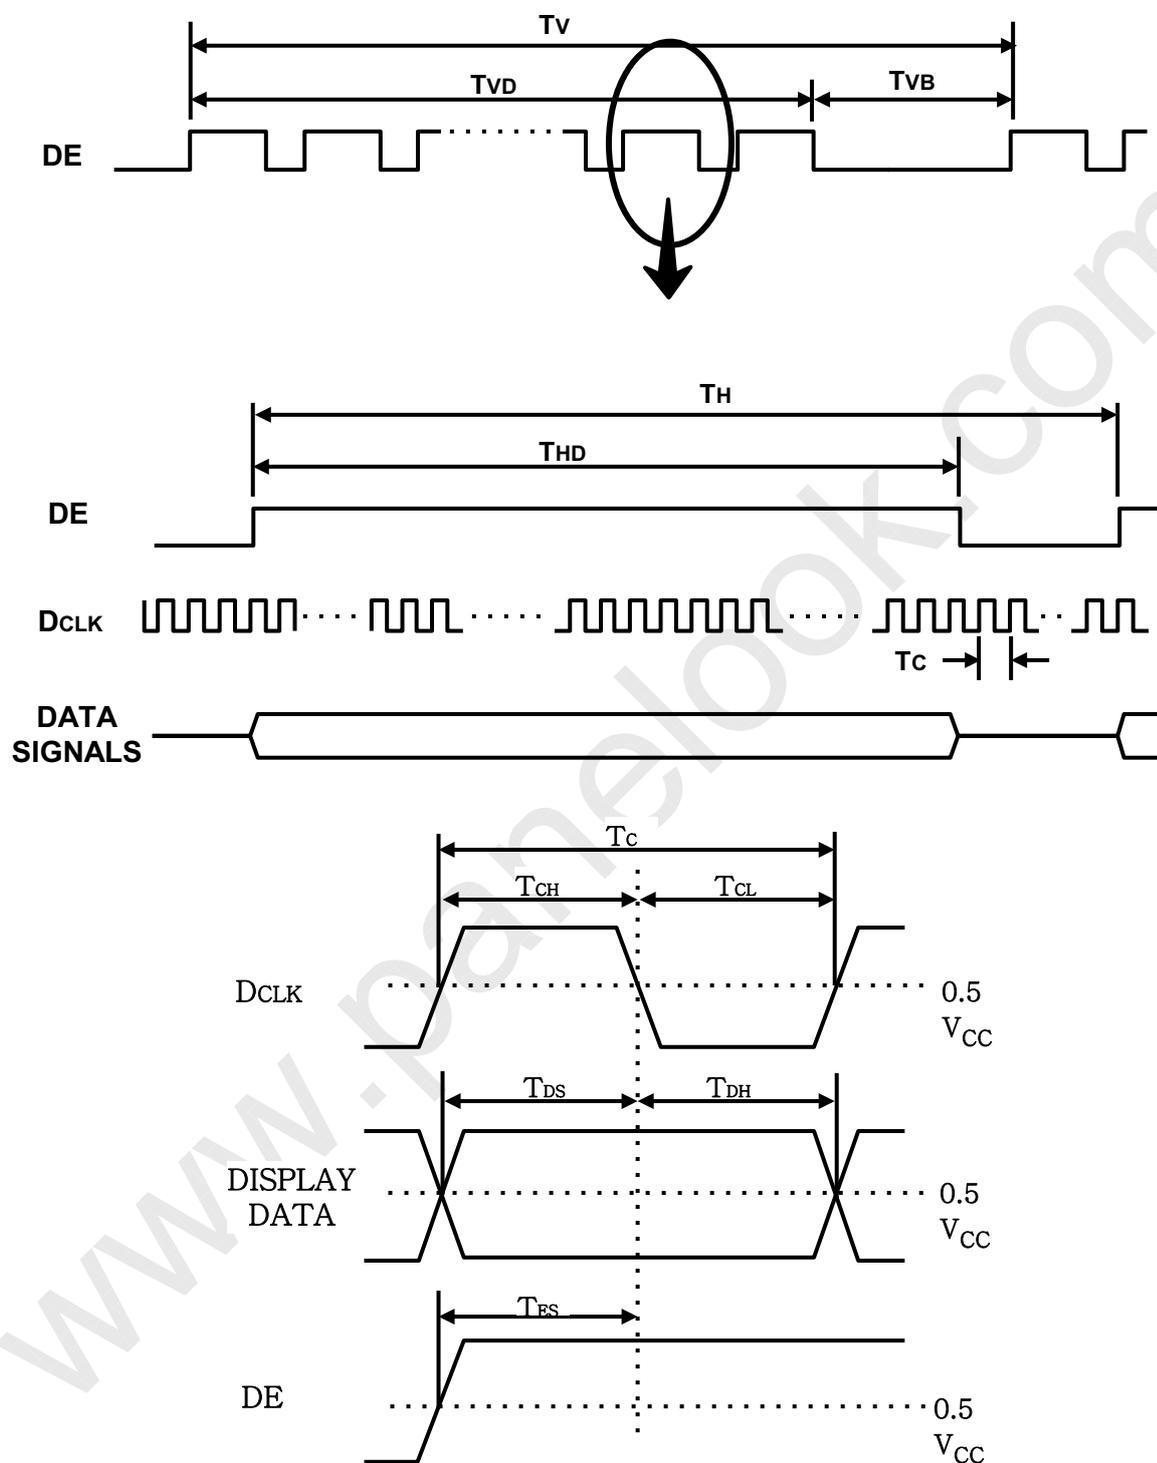

### 5.3 Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

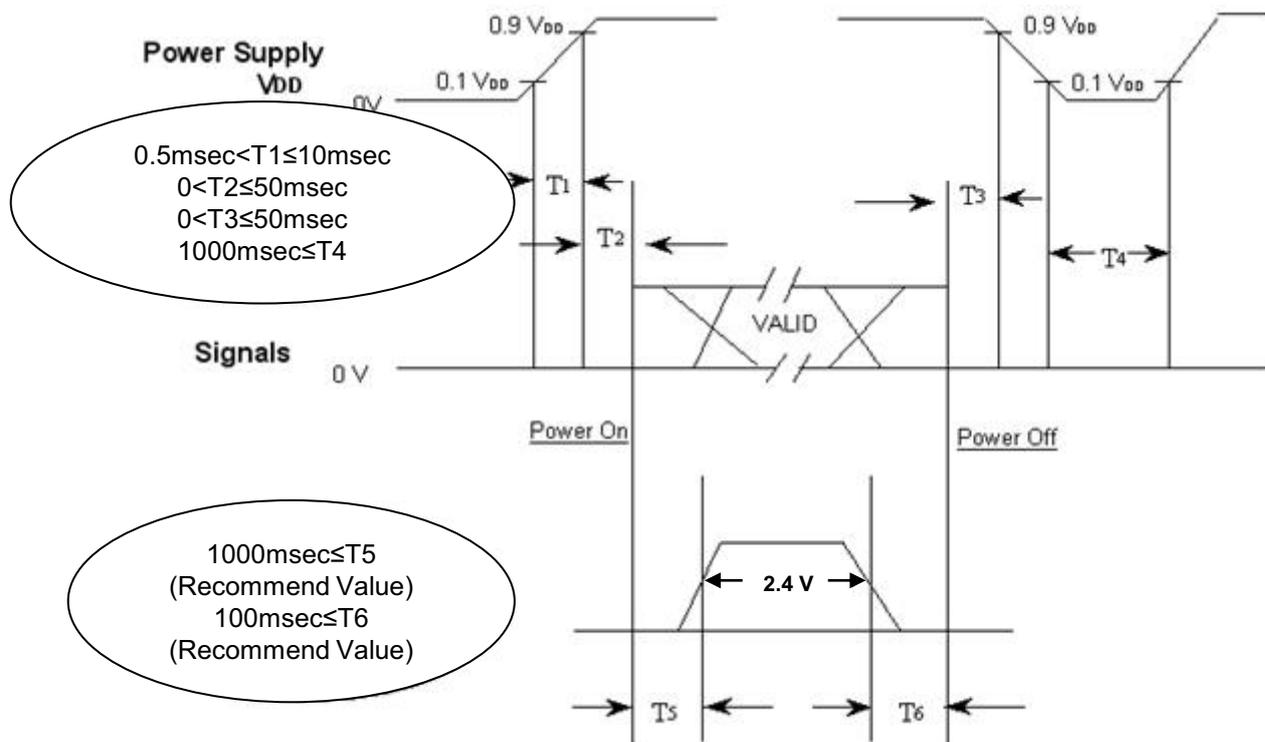

T1 : V<sub>DD</sub> rising time from 10% to 90%

T2 : The time from V<sub>DD</sub> to valid data at power ON.

T3 : The time from valid data off to V<sub>DD</sub> off at power Off.


T4 : V<sub>DD</sub> off time for Windows restart

T5 : The time from valid data to B/L enable at power ON.

T6 : The time from valid data off to B/L disable at power Off.

- The supply voltage of the external system for the Module input should be the same as the definition of V<sub>DD</sub>.
- Apply the lamp voltage within the LCD operation range. When the back light turns on before the LCD operation or the LCD turns off before the back light turns off, the display may momentarily show abnormal screen.
- In case of V<sub>DD</sub> = off level, please keep the level of input signals low or keep a high impedance.
- T4 should be measured after the Module has been fully discharged between power off and on period.
- Interface signal should not be kept at high impedance when the power is on.
- In case T5 is less than 1000msec and T6 is less than 100msec, Garbage Display can be seen. ( It is not related to electrical function issue, Just for recommendation to prevent Garbage Display )

### 7. Outline Dimension (Front View)

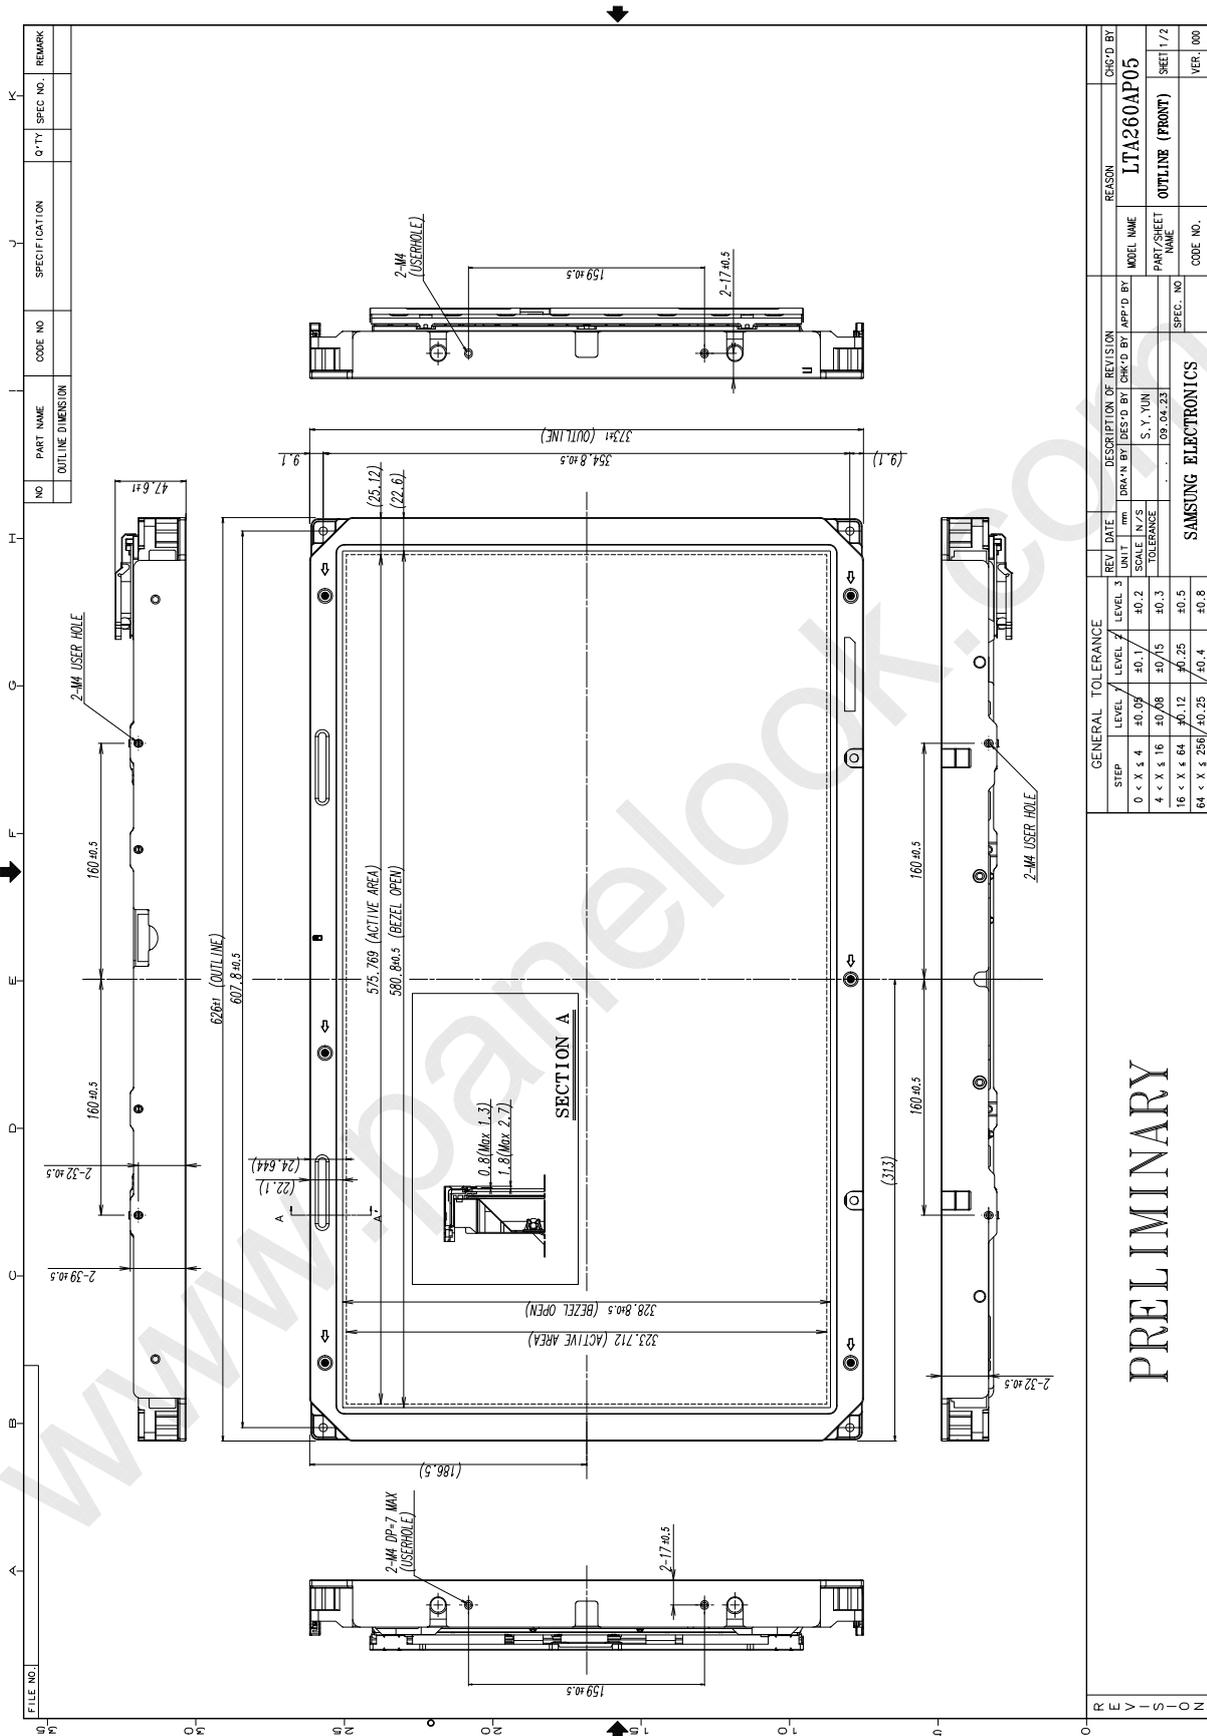

FILE NO.	NO	PART NAME	CODE NO	SPECIFICATION	O-TY	SPEC NO	REMARK
		OUTLINE DIMENSION					

GENERAL TOLERANCE		REV	DATE	DESCRIPTION OF REVISION		CHK'D BY
STEP	LEVEL	LEVEL 3	UNIT	MM	SCALE	N/S
0 < X ≤ 4	±0.05	±0.1	±0.2			
4 < X ≤ 16	±0.08	±0.15	±0.3			
16 < X ≤ 64	±0.12	±0.25	±0.5			
64 < X ≤ 256	±0.25	±0.4	±0.8			

REASON	CHK'D BY
LTA260AP05	
MODEL NAME	
PART/SHEET NAME	
OUTLINE (FRONT)	
SHEET 1/2	


  

DESIGNED BY	APP'D BY	DATE	SCALE
S. Y. YUN		09.04.23	

COMPANY	SPEC. NO.	CODE NO.	VER.
SAMSUNG ELECTRONICS			000

## 7. Outline Dimension (Rear View)

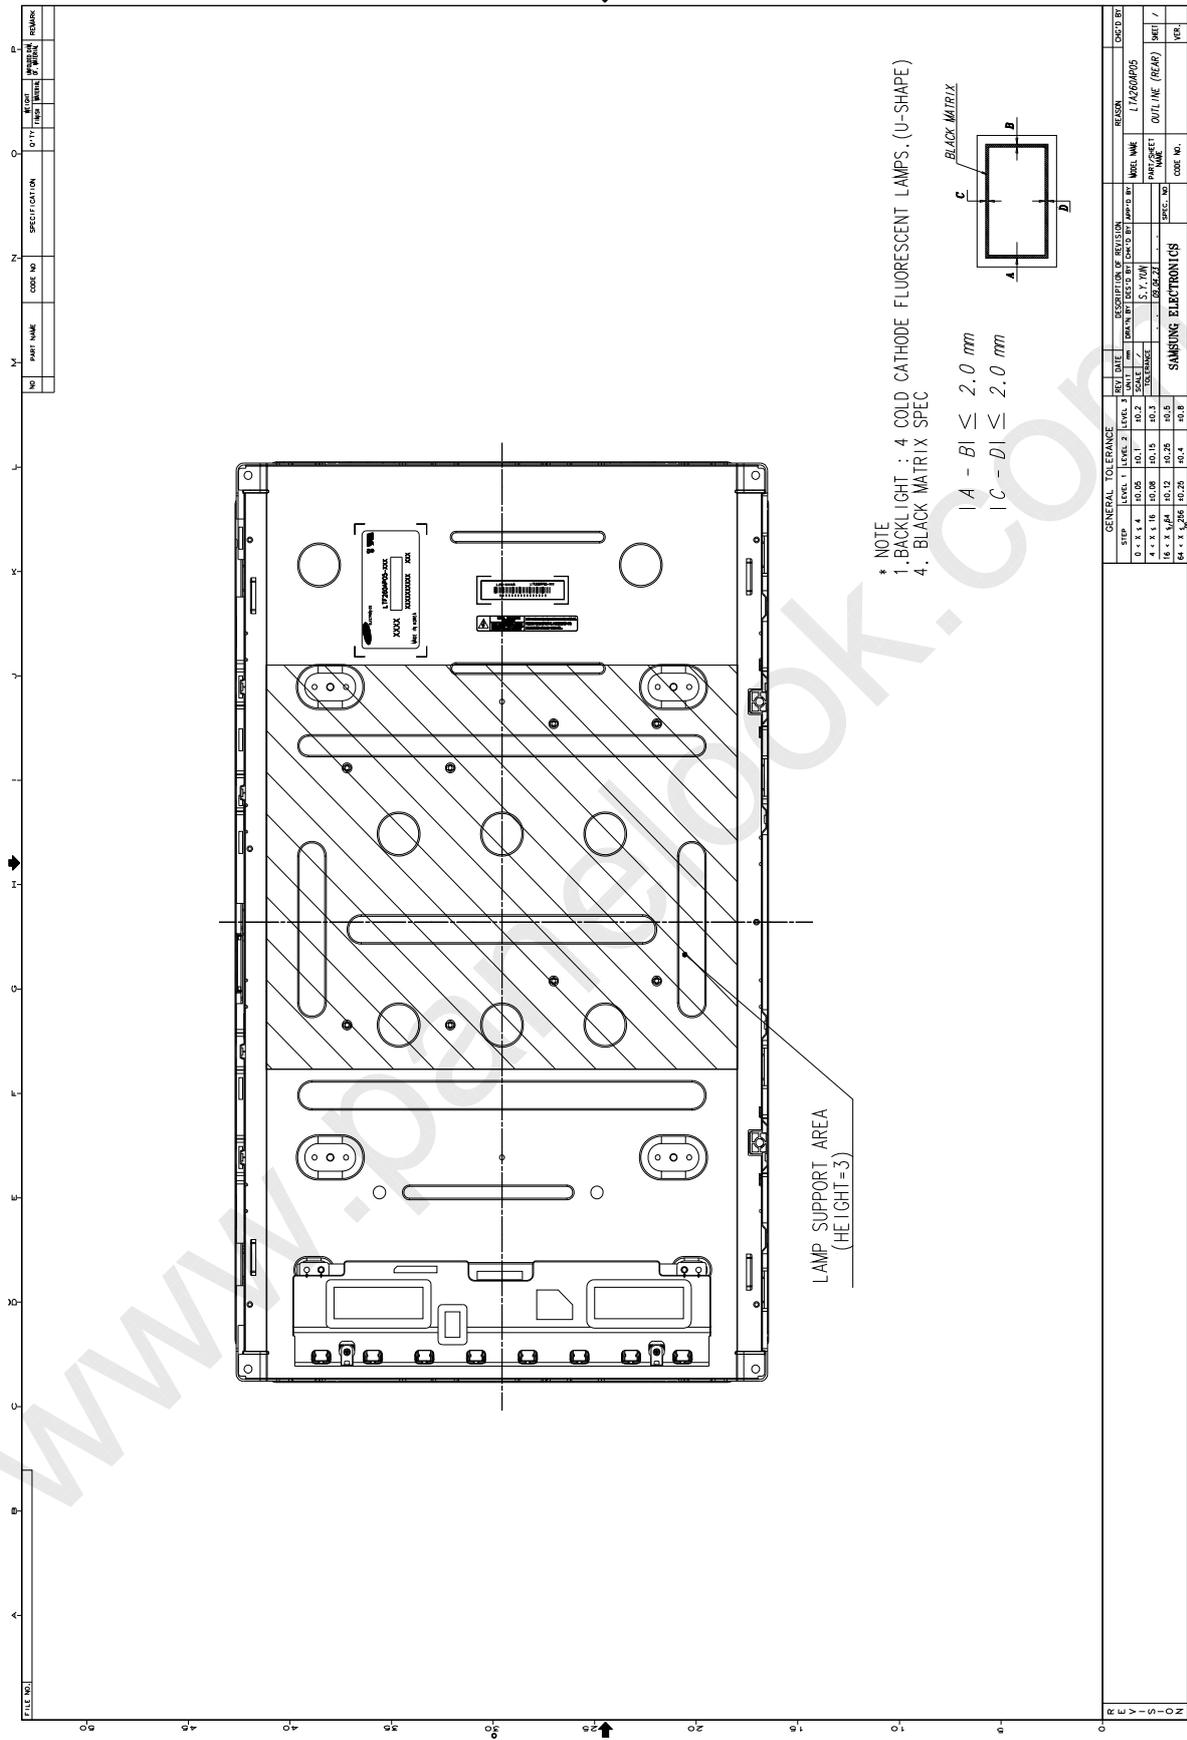


## 7. PACKING

### 7.1 CARTON (Internal Package)

#### (1) Packing Form

Corrugated fiberboard box and corrugated cardboard as shock absorber

#### (2) Packing Method

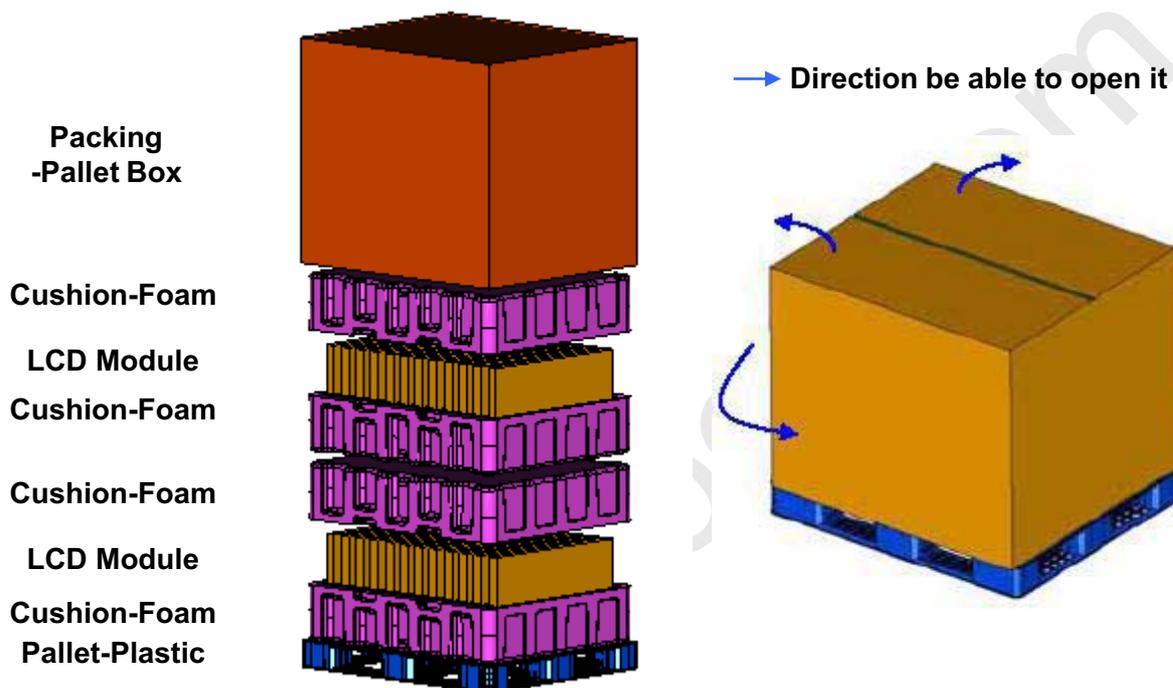

### 7.2 Packing Specification

Item	Specification	Remark
LCD Packing	24ea / (Packing-Pallet Box)	1. 132 Kg / LCD (24ea) 2. 2.7 Kg / Cushion-pallet (1ea) 3. 7.0 Kg / Packing-Pallet Box (1ea) 4. Cushion-pallet Material : EPS 5. Packing-Pallet Box Material : DW4
Pallet	1Box / Pallet	1. Pallet weight = 8kg 2. 8Kg/Pallet
Packing Direction	Vertical	
Total Pallet Size	H x V x height	1150mm(H) x 985mm(V) x 1054mm(height)
Total Pallet Weight	157.8 kg	Pallet(8kg) + Module(5.5kg*24ea=132kg) + Cushion(2.7kg*4ea=10.8kg) + Pallet-BOX(7.0kg)

MODEL

LTI260AP01

Doc. No

05-000-G-101007


Page

21 / 25


### 8. MARKING & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.


- (1) Part number :ZXXS260-L02
- (2) Revision: Three letters
- (3) Lot number : X X X X XXX XX X

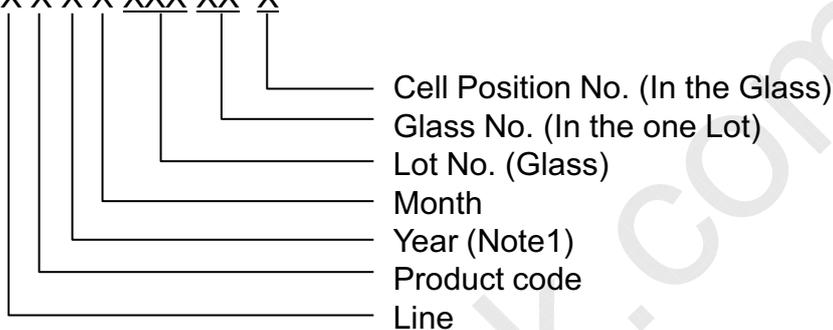

#### (4) Nameplate Indication

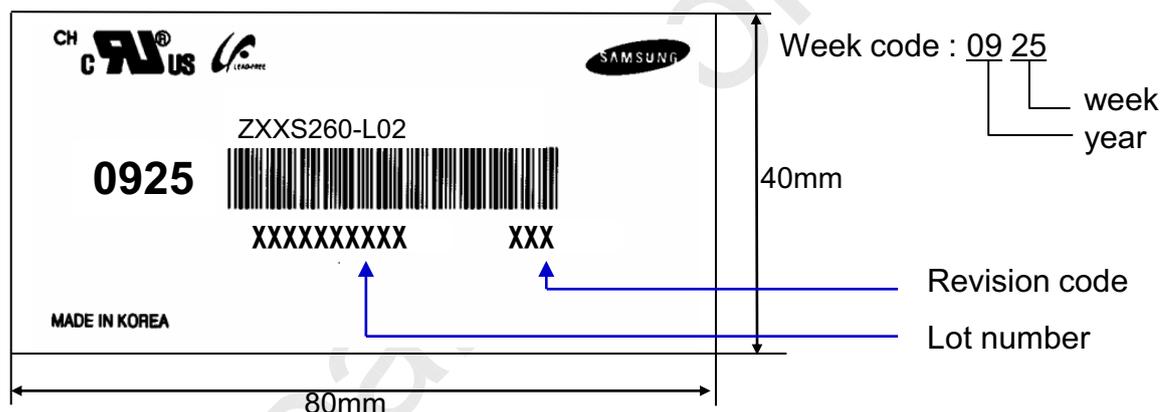

#### (5) Packing box attach

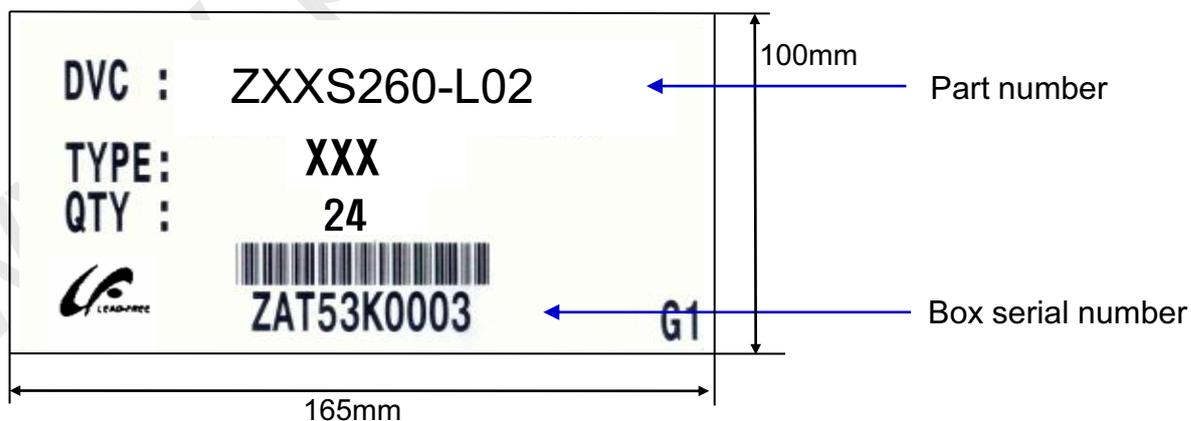

#### (6) Others

- 1. After service part  
 Lamps cannot be replaced because of the narrow bezel structure.

## 9. General Precautions

### 9.1 Handling

- (a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.
- (b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.
- (c) Refrain from strong mechanical shock and / or any force to the Module. In addition to damage, this may cause improper operation or damage to the Module and CCFT back light.
- (d) Note that polarizers are very fragile and could be damage easily. Do not press or scratch the surface harder than a HB pencil lead.
- (e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.
- (f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.
- (g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane. Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.
- (i) Protect the Module from static, or the CMOS Gate Array IC would be damaged.
- (j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (k) Do not disassemble the Module.
- (l) Do not pull or fold the lamp wire.
- (m) Do not adjust the variable resistor located on the Module.
- (n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (o) Pins of I/F connector should not be touched directly with bare hands.

## 9.2 Storage

- (a) Do not leave the Module in high temperature, and high humidity for a long time. It is highly recommended to store the Module with temperature from 0 to 35 °C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD Module in direct sunlight.
- (c) The Module should be stored in a dark place. It is prohibited to apply sunlight or fluorescent light in storing.

## 9.3 Operation

- (a) Do not connect or disconnect the Module in the "Power On" condition.
- (b) Power supply should always be turned on/off by the "Power on/off sequence"
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference should be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The cable between the back light connector and its inverter power supply should be connected directly with a minimized length. A longer cable between the back light and the inverter may cause lower luminance of lamp(CCFT) and may require higher startup voltage(Vs).

## 9.4 Operation Condition Guide

- (a) The LCD product should be operated under normal conditions.  
Normal condition is defined as below;
  - Temperature :  $20 \pm 15$  °C
  - Humidity :  $55 \pm 20$  %
  - Display pattern : continually changing pattern (Not stationary)
- (b) If the product will be used in extreme conditions such as high temperature, humidity, display patterns or operation time etc., It is strongly recommended to contact SEC for Application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at Airports, Transit Stations, Banks, Stock market, and Controlling systems.

## 9.5 Others

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. ( supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)  
Otherwise the Module may be damaged.
- (d) If the Module keeps displaying the same pattern for a long period of time, the image may be "sticked" to the screen.  
To avoid image sticking, it is recommended to use a screen saver.
- (e) This Module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.
- (f) Please contact SEC in advance when you display the same pattern for a long time.