

RFFM6205

2.0V to 4.0V, 2.4GHz Front End Module

The RFFM6205 is a complete integrated solution in a single Front End Module (FEM) for Zigbee® applications in the 2.4GHz to 2.5GHz band and Bluetooth® transmitter applications. The ultra-small factor and integrated matching minimizes layout area in the customer's application and greatly reduces the number of external components. This simplifies the total front end solution by reducing the bill of materials, system footprint, and manufacturing cost.

The FEM integrates a power amplifier (PA) plus harmonic filter in the transmit (TX) path, a low noise amplifier (LNA) in the receive (RX) path, and a low loss bidirectional through mode path. The RFFM6205 incorporates two single-pole triple-throw (SP3T) switches to provide a single port for TDD access and a single antenna port for TX, RX, and through mode paths. The device is provided in a 2.5mm x 2.5mm x 0.5mm




Package: QFN, 16-pin,
2.5mm x 2.5mm x 0.5mm

Features

- Tx Output Power = 14dBm
- Integrated RF Front End Module with Rx/Tx switch, PA, Filter, LNA, Bidirectional Thru path and 2-SP3T Switch
- 50Ω single-ended Bidirectional Transceiver Interface.
- Voltage Range = 2.0V to 4.0V
- Rx Noise Figure = 2.5dB

Applications

- ZigBee® 802.15.4 Based Systems for Remote Monitoring and Control
- AA Battery Operation
- 2.4GHz ISM Band Applications
- Smart Meters for Energy Management
- Bluetooth® Transmitter systems

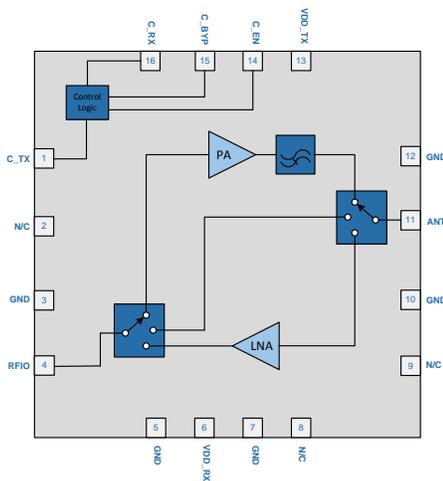

Functional Block Diagram

Ordering Information

| | |
|-----------------|---|
| RFFM6205SB | Standard 5 piece bag |
| RFFM6205SQ | Standard 25 piece bag |
| RFFM6205SR | Standard 100 piece reel |
| RFFM6205TR7 | Standard 2500 piece reel |
| RFFM6205PCK-410 | Fully assembled evaluation board w/5 pc bag |

Absolute Maximum Ratings

| Parameter | Rating | Unit |
|----------------------------|-------------|------|
| Voltage | 4.5 | V |
| Operating Temperature | -40 to +125 | °C |
| Storage Temperature | -40 to +150 | °C |
| Maximum Input Power to PA | +20 | dBm |
| Maximum Input Power to LNA | +5 | dBm |
| ESD, HBM (Pin-to-GND) | 500 | V |
| ESD, CDM (Pin-to-GND) | 500 | V |
| Moisture Sensitivity | MSL 3 | |



Caution! ESD sensitive device.



RFMD Green: RoHS status based on EU Directive 2011/65/EU (at time of this document revision), halogen free per IEC 61249-2-21, < 1000ppm each of antimony trioxide in polymeric materials and red phosphorus as a flame retardant, and <2% antimony in solder.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

Nominal Operating Parameters

| Parameter | Specification | | | Unit | Condition |
|--|---------------|------|------|------|--|
| | Min | Typ | Max | | |
| | | | | | Specifications must be met across supply voltage, control voltage, and temperature ranges unless otherwise specified |
| TX Frequency | 2405 | | 2485 | MHz | |
| RX Frequency | 2405 | | 2485 | MHz | |
| Bypass Frequency | 2405 | | 2485 | MHz | |
| ANT RF Port Impedance | | 50 | | Ω | |
| RFIO Port Impedance | | 50 | | Ω | |
| V _{BAT} | 2.0 | 3.0 | 4.0 | V | |
| Off Mode Current - Leakage | | | | | V_{DD_TX} = 3.0V, C_EN = Low, V_{DD_RX} = 3.0V, C_TX = Low, C_RX = Low, C_BYP = Low, Temp = 25°C |
| Supply Current - IDDTX | | 50 | 200 | nA | |
| Supply Current - IDDRX | | 50 | 200 | nA | |
| C_RX Current | | | 1.0 | nA | |
| C_TX Current | | | 1.0 | nA | |
| C_BYP Current | | | 1.0 | nA | |
| Transmit Mode - Power Amplifier | | | | | V_{DD_TX} = 3.0V, C_EN = High, V_{DD_RX} = 3.0V, C_TX = High, C_RX = Low, C_BYP = Low, Temp = 25°C unless otherwise specified |
| Input Return Loss | | | 10.0 | dB | |
| Output Return Loss | | | 8.0 | dB | |
| Small Signal Gain | 11.0 | 14.0 | | dB | |
| Gain Flatness | -0.3 | | 0.3 | dB | |
| Rated Output Power | | 15.0 | | dBm | V _{DD_TX} = 4.0V |
| | 13.0 | 14.0 | | dBm | V _{DD_TX} = 3.3V |
| | 12.5 | 13.5 | | dBm | V _{DD_TX} = 3.0V |
| | 10.0 | 11.0 | | dBm | V _{DD_TX} = 2.0V |


| Parameter | Specification | | | Unit | Condition |
|--|---------------|-------|------------------|---------|---|
| | Min | Typ | Max | | |
| Transmit Mode - Power Amplifier (continued) | | | | | V_{DD_TX} = 3.0V, C_EN = High, V_{DD_RX} = 3.0V, C_TX =High, C_RX =Low, C_BYP =Low, Temp =25°C |
| Supply Current | | 13 | 18 | mA | V _{DD_TX} = 2.0V; P _{OUT} = 10dBm |
| | | 17 | 21 | mA | V _{DD_TX} = 3.0V; P _{OUT} = 13dBm |
| | | 19 | 23 | mA | V _{DD_TX} = 3.3V; P _{OUT} = 14dBm |
| | | 21 | 27 | mA | V _{DD_TX} = 4.0V; P _{OUT} = 15dBm |
| Quiescent Current | | 5 | | mA | ID _{DD_RX} + ID _{DD_TX} |
| 2f ₀ ; P _{OUT} = 14dBm | | -20.0 | -15.0 | dBm/MHz | |
| 2f ₀ ; P _{OUT} = 14dBm, with external filter | | -45.0 | -42.0 | dBm/MHz | |
| 3f ₀ ; P _{OUT} = 14dBm | | -50.0 | | dBm/MHz | |
| VSWR: Stability (ruggedness) | | | 4:1 | | |
| VSWR: No Damage | | | 8:1 | | |
| Gain Settling Time | | 230 | 300 | ns | 10% to 90% |
| Receive Mode – LNA | | | | | V_{DD_TX} = 3.0V, C_EN = High, V_{DD_RX} = 3.0V, C_TX =Low, C_RX =High, C_BYP =Low, Temp =25°C |
| Input Return Loss | | 12.0 | 9.0 | dB | |
| Output Return Loss | | 10.0 | 8.0 | dB | |
| Gain | 11.0 | 14.0 | 14.5 | dB | |
| Gain Flatness | -0.3 | | 0.3 | dB | |
| Noise Figure | | 2.5 | 3.0 | dB | |
| Supply Current | 2.0 | 4.0 | 7.0 | mA | |
| IIP3 | | 4.0 | | dBm | |
| IP1dB | -8.0 | -5.0 | | dBm | |
| Bidirectional Thru Mode | | | | | V_{DD_TX} = 3.0V, C_EN = High, V_{DD_RX} = 3.0V, C_TX =Low, C_RX =Low, C_BYP =High, Temp =25°C |
| Insertion Loss | | 1.5 | 2.5 | dB | |
| Input Return Loss | | | 10.0 | dB | |
| Output Return Loss | | | 10.0 | dB | |
| Supply Current | | 100 | 400 | nA | |
| IIP3 | 35.0 | 40.0 | | dBm | |
| Gain flatness | -0.3 | | 0.3 | dB | |
| Maximum Input Power | 25 | | | dBm | |
| Bluetooth Transmitter GFSK | | | | | |
| 20dB Bandwidth | | 870 | | kHz | |
| Adjacent Channel Power M – N = 2 | | -63 | | dBc | |
| Adjacent Channel Power M – N ≥ 3 | | -72 | | dBc | |
| Bluetooth Transmitter EDR | | | | | |
| In-Band Spurious Emission | | -35 | | dBc | |
| Adjacent Channel Power M – N = 2 | | -33 | | dBc | |
| Adjacent Channel Power M – N ≥ 3 | | -45 | | dBc | |
| Logic | | | | | |
| Logic Level "High" | 1.6 | 1.8 | V _{BAT} | V | |

| Parameter | Specification | | | Unit | Condition |
|--|---------------|-----|-------|------|-----------|
| | Min | Typ | Max | | |
| Logic | | | | | |
| Logic Level "Low" | 0.0 | | 0.2 | V | |
| C_TX Input source current at Logic "High" | | 100 | 800 | μA | |
| C_RX Input source current at Logic "High" | | 100 | 600 | uA | |
| C_BYP Input source current at Logic "High" | | 0.1 | 1.0 | uA | |
| C_EN Input source current at Logic "High" | | | 3.0 | uA | |
| Input source current Logic Level "Low" | | | 0.001 | μA | |


Switch Control Logic Table

| Mode | C_EN | C_TX | C_RX | C_BYP |
|-------------|------|------|------|-------|
| TX Mode | High | High | Low | Low |
| RX Mode | High | Low | High | Low |
| Bypass Mode | High | Low | Low | High |
| Power Down | Low | Low | Low | Low |


Application Schematic

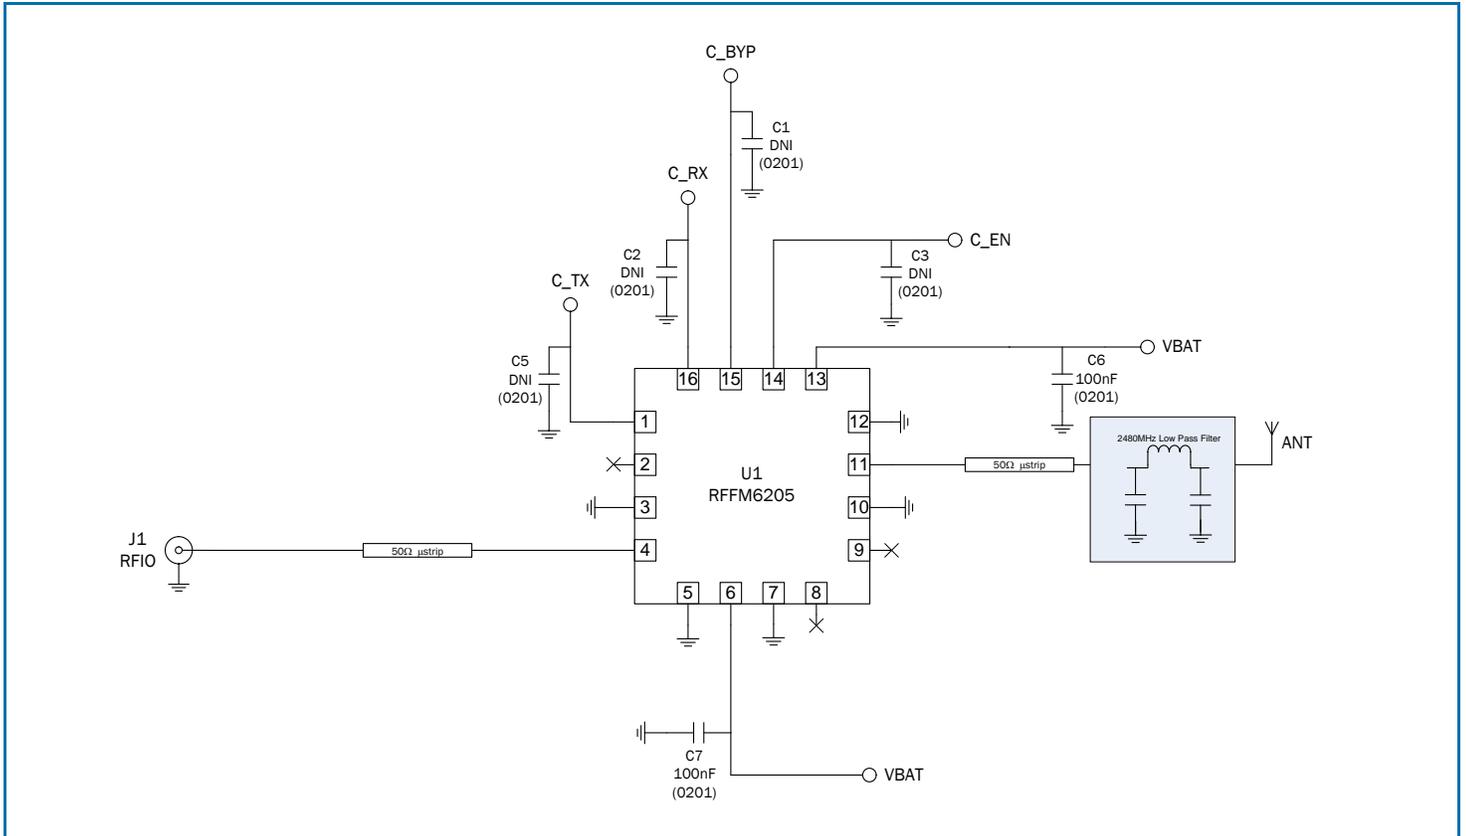


Pin Out

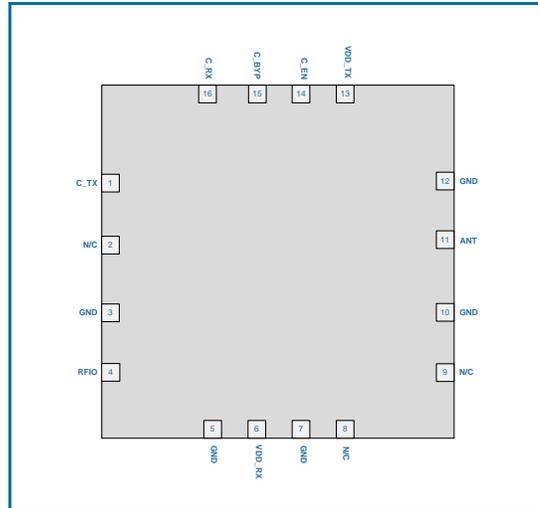

Package Outline and Branding Drawing (Dimensions in millimeters)

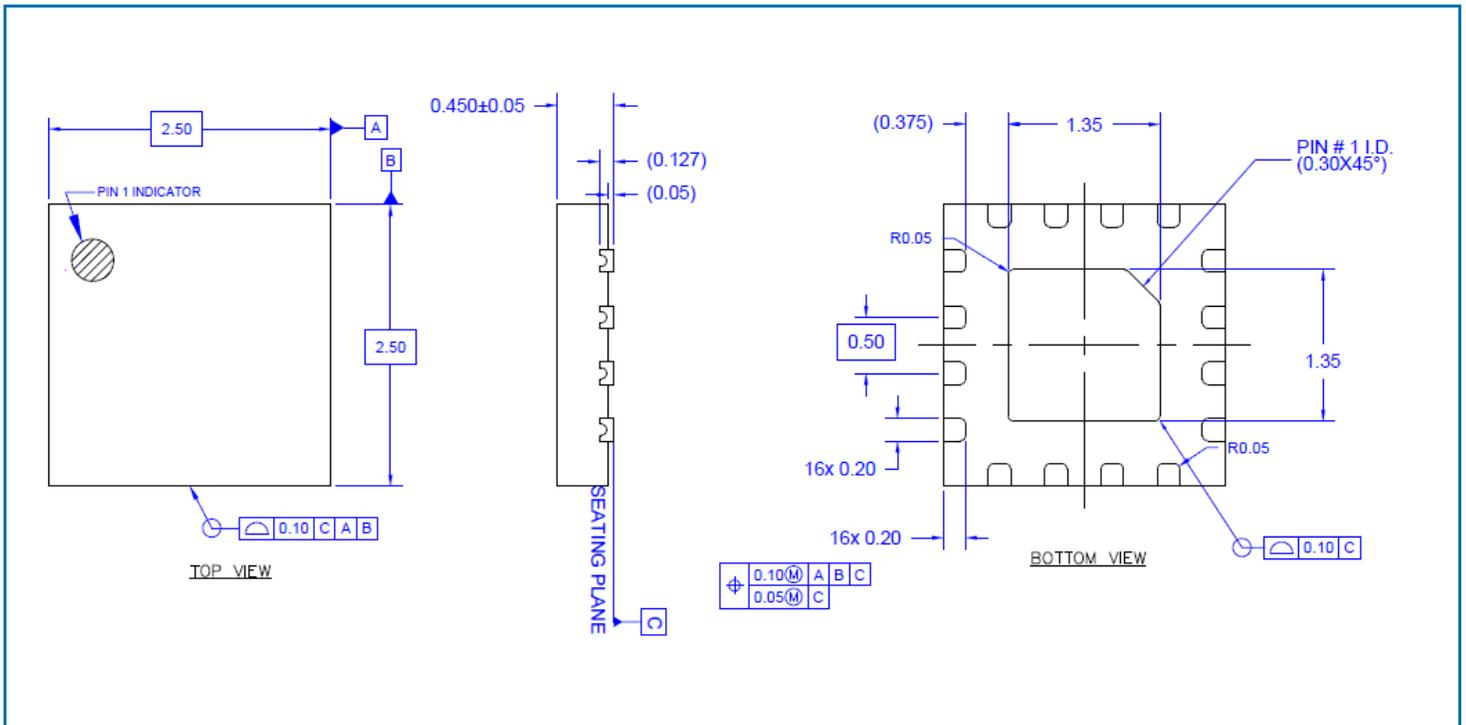

Recommended PCB Patterns

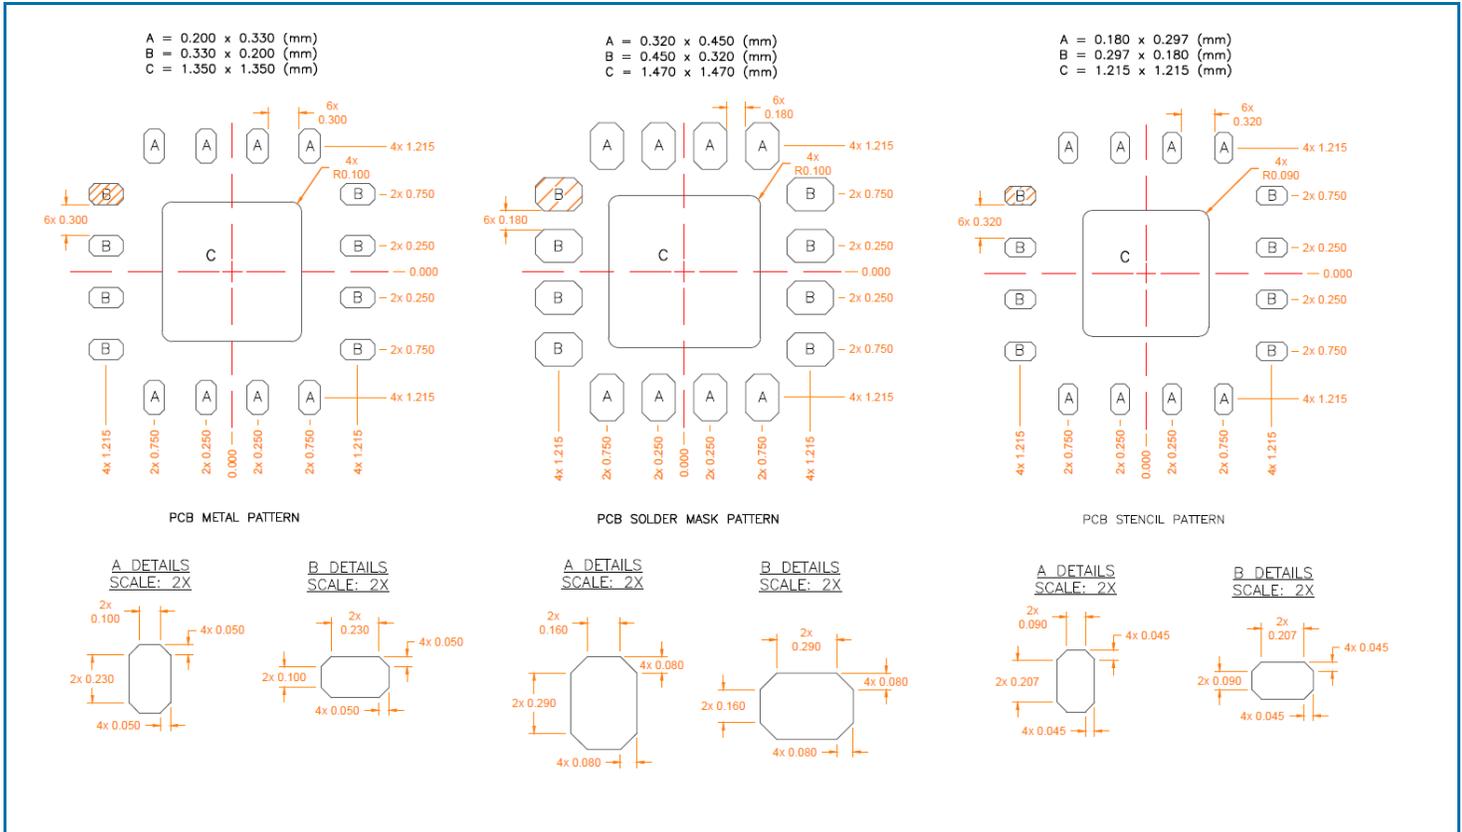

Pin Names and Descriptions

| Pin | Name | Description |
|----------|--------|---|
| 1 | C_TX | Control Pin: Transmit Enable/Disable, view logic table for operation |
| 2 | N/C | No Internal Connection; Open on PCB |
| 3 | GND | No Internal Connection; Ground on PCB |
| 4 | RF I/O | RF Input/Output signal: internally matched to 50Ω, DC Blocked |
| 5 | GND | No Internal Connection; Ground on PCB |
| 6 | VDD_RX | Receive Low Noise Amplifier Voltage Supply |
| 7 | GND | No Internal Connection; Ground on PCB |
| 8 | N/C | No Internal Connection; No Connect on PCB |
| 9 | N/C | No Internal Connection; No Connect on PCB |
| 10 | GND | No Internal Connection; Ground on PCB |
| 11 | ANT | Antenna Switch Common Port, internally matched to 50 ohms, DC Blocked |
| 12 | GND | No Internal Connection; Ground on PCB |
| 13 | VDD_TX | Transmit Power Amplifier Voltage Supply |
| 14 | C_EN | Control Pin: Enable FEM, view logic table for operation |
| 15 | C_BYP | Control Pin: Bypass Enable/Disable, view logic table for operation |
| 16 | C_RX | Control Pin: Receive Enable/Disable, view logic table for operation |
| Pkg Base | GND | Ground connection. The back side of the package should be connected to the ground plane through as short a connection as possible, e.g., PCB vias under the device are recommended. |