



**Power Dividers  
 In-Phase, 3-Way**

**Description**

The 4J3305 is a low profile 3 way Wilkinson power divider in an easy to use surface mount package designed for UMTS and other 3G applications. The 4J3305 is ideal for low power, in phase divider/combiner applications. Parts have been subjected to rigorous qualification testing and units are 100% tested. They are manufactured using materials with x and y thermal expansion coefficients compatible with common substrates such as FR4, G-10 and polyamide.



**Features:**


- 2.0 – 2.3GHz
- 3-Way Split
- Low loss
- High Isolation
- In Phase
- Surface Mountable
- Tape And Reel
- Convenient Package
- 100% Tested

**ELECTRICAL SPECIFICATIONS\*\***


Frequency	Isolation	Insertion Loss	Amplitude Balance
GHz	dB Min	dB Max	dB Max
2.0 – 2.3	16	0.30	±0.30
VSWR Input	VSWR Output	Phase Balance	Operating Temp.
Max:1	Max:1	Degrees	°C
1.50	1.60	± 3	-55 to +85

\*\*Specification based on performance of unit properly installed on microstrip printed circuit boards with 50 Ω nominal impedance. Maximum input power: 5 Watts average CW when terminated into a 1.2:1 maximum VSWR. Specifications subject to change without notice.

**Outline Drawing**

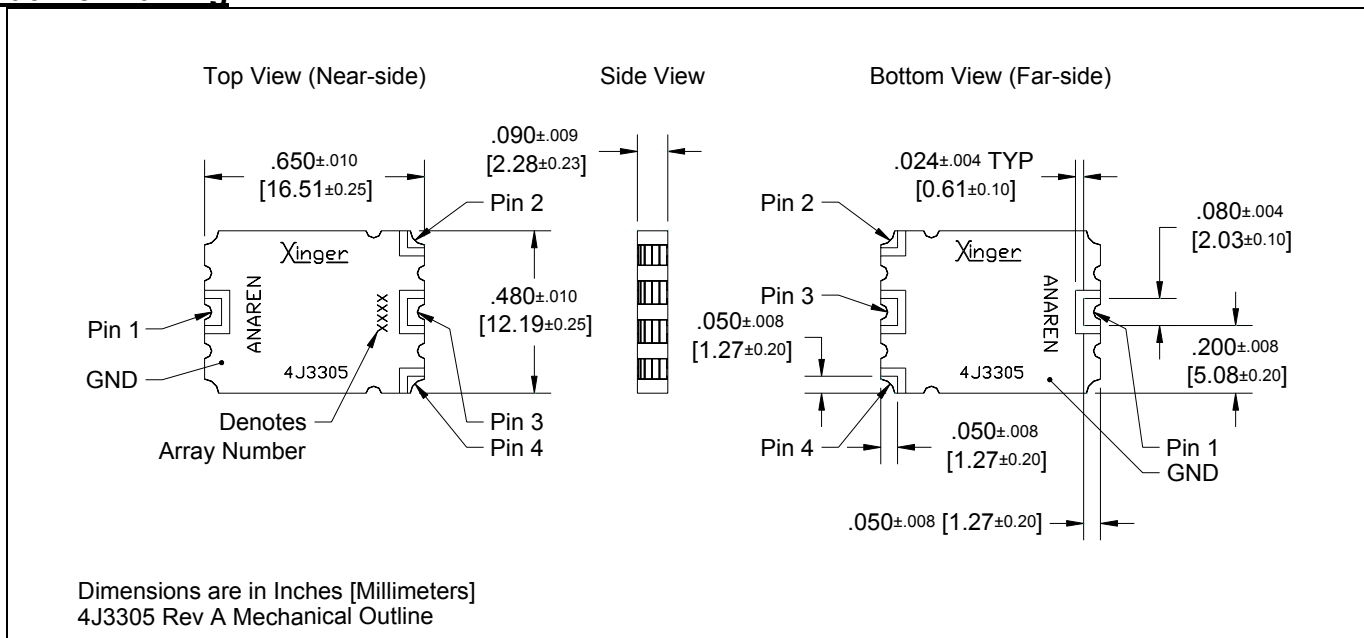


## Typical Performance: 1.9 GHz. to 2.4 GHz.

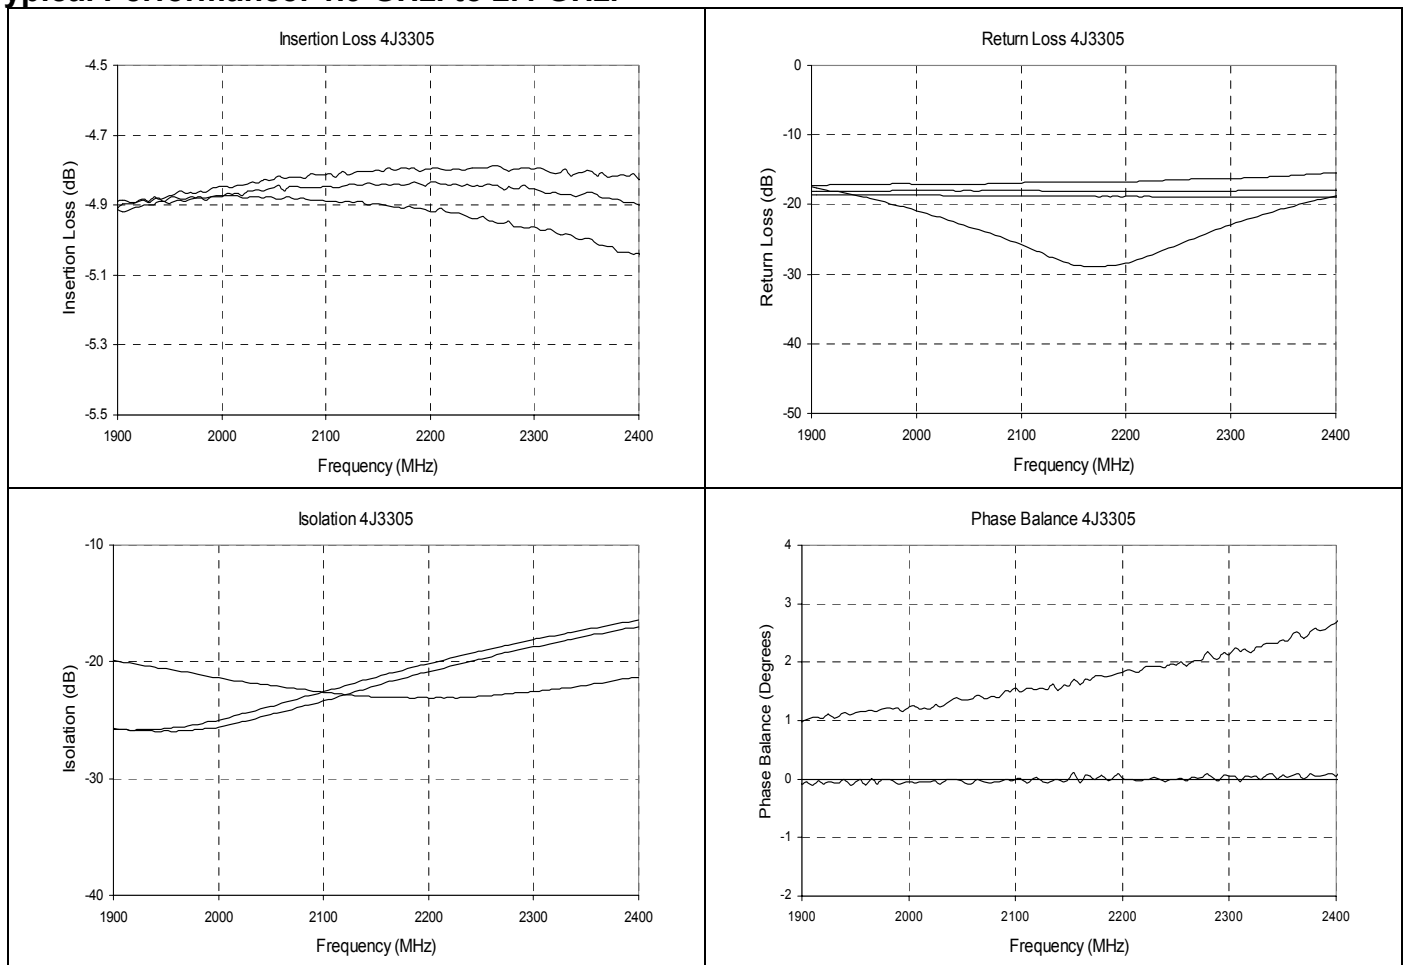


### Pin Configuration

#### DIVIDER





#### COMBINER



### Mounting Footprint

To ensure proper electrical and thermal performance there must be a ground plane with 100% solder connection underneath the part

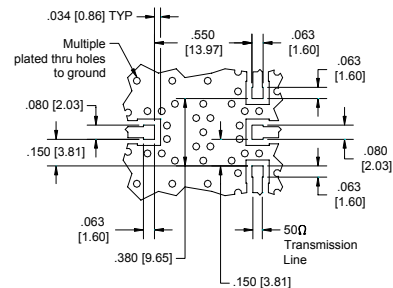

Dimensions are in Inches [Millimeters]  
4J3305 Rev A Mounting Footprint

USA/Canada: (315) 432-8909  
Toll Free: (800) 544-2414  
Europe: +44 2392-232392

Available on Tape and Reel For Pick and Place Manufacturing.

