

# 2SB1030, 2SB1030A

Silicon PNP epitaxial planer type

For low-frequency amplification


Complementary to 2SD1423 and 2SD1423A

## Features

- Optimum for high-density mounting.
- Allowing supply with the radial taping.

## Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Collector to base voltage	V <sub>CBO</sub>	-30	V
2SB1030A		-60	
Collector to emitter voltage	V <sub>CEO</sub>	-25	V
2SB1030A		-50	
Emitter to base voltage	V <sub>EBO</sub>	-7	V
Peak collector current	I <sub>CP</sub>	-1	A
Collector current	I <sub>C</sub>	-0.5	A
Collector power dissipation	P <sub>C</sub>	300	mW
Junction temperature	T <sub>j</sub>	150	°C
Storage temperature	T <sub>stg</sub>	-55 ~ +150	°C

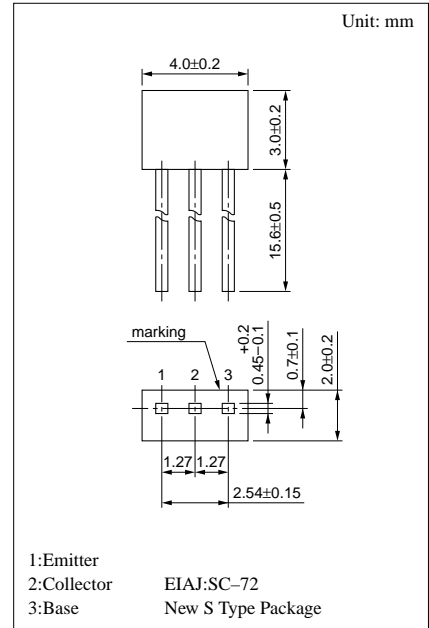

## Electrical Characteristics (Ta=25°C)


Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	I <sub>CBO</sub>	V <sub>CB</sub> = -20V, I <sub>E</sub> = 0			-0.1	μA
	I <sub>CEO</sub>	V <sub>CE</sub> = -20V, I <sub>B</sub> = 0			-1	μA
Collector to base voltage	V <sub>CBO</sub>	I <sub>C</sub> = -10μA, I <sub>E</sub> = 0	-30			V
			-60			
Collector to emitter voltage	V <sub>CEO</sub>	I <sub>C</sub> = -2mA, I <sub>B</sub> = 0	-25			V
			-50			
Emitter to base voltage	V <sub>EBO</sub>	I <sub>E</sub> = -10μA, I <sub>C</sub> = 0	-7			V
Forward current transfer ratio	h <sub>FE1</sub> <sup>*1</sup>	V <sub>CE</sub> = -10V, I <sub>C</sub> = -150mA <sup>*2</sup>	85		340	
	h <sub>FE2</sub>	V <sub>CE</sub> = -10V, I <sub>C</sub> = -500mA <sup>*2</sup>	40			
Collector to emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = -300mA, I <sub>B</sub> = -30mA <sup>*2</sup>		-0.35	-0.6	V
Transition frequency	f <sub>T</sub>	V <sub>CB</sub> = -10V, I <sub>E</sub> = 50mA, f = 200MHz		200		MHz
Collector output capacitance	C <sub>ob</sub>	V <sub>CB</sub> = -10V, I <sub>E</sub> = 0, f = 1MHz		6	15	pF

<sup>\*2</sup> Pulse measurement


<sup>\*1</sup>h<sub>FE1</sub> Rank classification

Rank	Q	R	S
h <sub>FE1</sub>	85 ~ 170	120 ~ 240	170 ~ 340


$P_C - T_a$

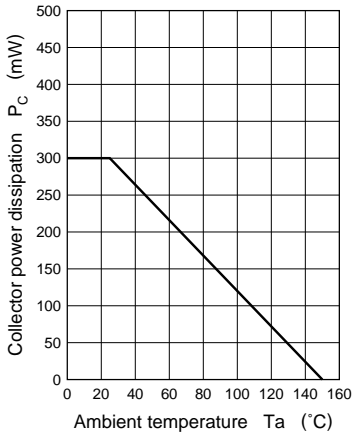


$I_C - V_{CE}$

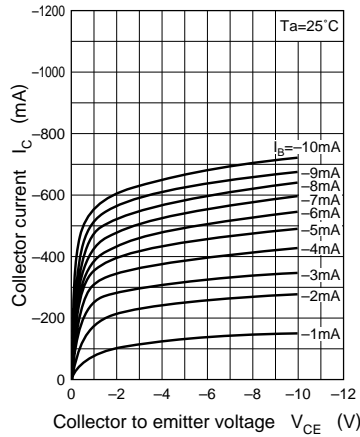


$V_{BE(sat)} - I_C$

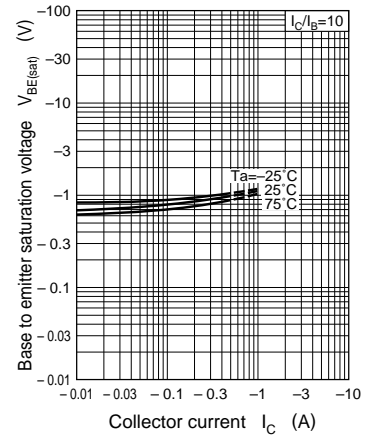


$V_{CE(sat)} - I_C$

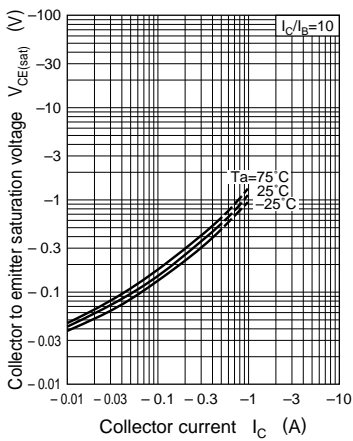


$h_{FE} - I_C$

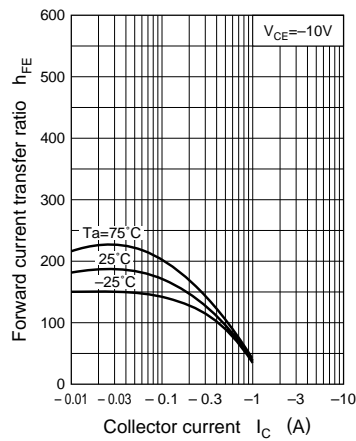

$f_T - I_E$

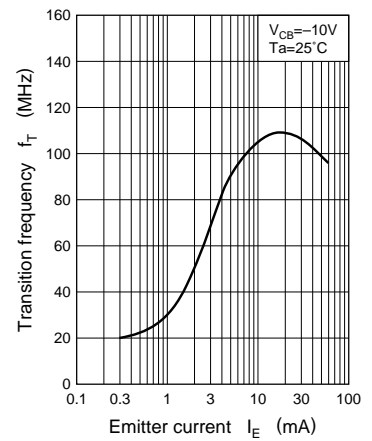

$C_{ob} - V_{CB}$

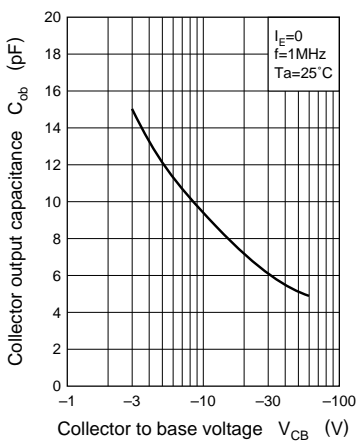

$NV - I_C$

