

STRUCTURE Silicon Monolithic Integrated Circuit
 PRODUCT White LED Driver for LCD Backlights with step-up DC/DC controller

TYPE **BD9203EFV**

FEATURE

- 6CH LED current driver up to 150mA/CH built-in *2
- Over voltage protection (OVP), Short circuit protection (SCP), LED open and short detection
- Step-up DC/DC controller built-in
- PWM and DC Dimming
- Programmable timer latch and soft-start period by external capacitor
- Over voltage protection (OVP), Short current protection (SCP), LED open and short detection
- Under voltage lock out (UVLO)
- HTSSOP-B28 package

○ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	Symbol	Limit	Unit
Power Supply Voltage	VCC	36	V
	VREF5V	7	V
STB Voltage	STB	36	V
LED Output Voltage	LED1~6	40	V
FAIL Output Voltage	FAIL	40	V
Pin Voltage	SEL, UVLO, PWM1, PWM2, RT, SS, SLOPE, ISET, VREF, CP, FB, OVP, CS	7	V
	N	15	V
Power Dissipation	Pd	3.30 *1	W
Operating Temperature Range	Topr	-40~+85	°C
Storage Temperature Range	Tstg	-55~+150	°C
LED Maximum Current	ILED	150 *2	mA

*1 Pd derated at 26.4 mW/°C for temperature above Ta=25°C, mounted on 70mm × 70mm × 1.6mm 2 layer(copper area 70mm × 70mm)glass-epoxy PCB.

*2 This is the constant current value per 1ch. Please perform setting of the constant current value in the range that is not beyond a value of Pd.

This product is not designed for protection against radioactive rays.

○ OPERATING CONDITIONS (Ta=25°C)

PARAMETER	Symbol	Limit	Unit
Power Supply Voltage	VCC	9~35	V
CT Oscillation Frequency Range	FCT	100~1000	kHz
VREF input voltage range	VREF	0~VREF5V	V

○ ELECTRICAL CHARACTERISTICS(unless otherwise specified VCC=24V, Ta=25°C)

PARAMETER	Symbol	Limit			UNIT	Conditions
		MIN.	TYP.	MAX.		
【Total Current Consumption】						
Circuit Current	ICC	—	5	10	mA	STB=3V, LED1~6=ON, RT=100kΩ
Standby Current	IST	—	0	10	uA	STB=0V
【VREF5V】						
VREF5V Voltage	VREF5	4.9	5.0	5.1	V	IO=0mA
VREF5V source current	IREF5	20	—	—	V	
【Switching block】						
N source resistance	RONH	-	7	14	Ω	ION=-10mA
N sink resistance	RONL	-	3.4	7	Ω	ION=10mA
【SOFT START】						
SS source current	ISS	-2.0	-1.0	-0.5	uA	
SS END pin voltage	VSS	3.8	4.0	4.2	V	SS=SWEEP UP
【Error-Amp block】						
LED control voltage	VLED	0.65	0.75	0.85	V	
FB sink current	IFBSINK	40	100	200	uA	LED=2.0V, VFB=1.0V
FB source current	IFBSOURCE	-200	-100	-40	uA	LED=0V, VFB=1.0V
【CT Oscillator block】						
Oscillation Frequency	FCT	500	600	700	kHz	RT=100kΩ
RT pin output voltage	VRT	1.05	1.5	1.95	V	
SLOPE pin output voltage	VSLOPE	1.05	1.5	1.95	V	
MAX DUTY	DMAX	76	85	94	%	
【OVP】						
Over Voltage Protection voltage	VOVP	3.8	4.0	4.2	V	VOVP=SWEEP UP
OVP hysteresis	VOVPHYS	100	200	400	mV	VOVP=SWEEP DOWN
OVP Feedback Voltage	FBOVP	3.5	3.6	3.7	V	PWM1, 2=0V
【SCP】						
Short Circuit Protection voltage	VSCP	0.05	0.20	0.35	V	VOVP=SWEEP DOWN
【UVLO】						
Operating voltage (VCC)	VUVLO_VCC	6.0	7.0	8.0	V	VCC=SWEEP UP
hysteresis (VCC)	VUHYS_VCC	150	300	600	mV	VCC=SWEEP DOWN
Cancel voltage (UVLO)	VUVLO_U	2.375	2.5	2.625	V	UVLO=SWEEP UP
hysteresis (UVLO)	VUHYS_U	50	100	200	mV	UVLO=SWEEP DOWN
【FILTER(CP)】						
CP detection voltage	VCP	1.8	2.0	2.2	V	CP=SWEEP UP
CP source current	ICP	-2.0	-1.0	-0.5	uA	VCP=0V
【LED output (LED1~6)】						
LED current accuracy	∠ILED	-3	-	3	%	ILED=40mA
Open detection voltage	VOPEN	0.05	0.20	0.35	V	VLED=SWEEP DOWN
Short detection voltage	VSHORT	4.5	5.0	5.5	V	VLED=SWEEP UP
【STB】						
Input High voltage	STBH	2.0	-	VCC	V	
Input Low voltage	STBL	-0.3	-	0.8	V	
Input current	IEN	13	25	38	uA	VIN=5V(STB)
【PWM1, PWM2】						
Input High voltage	PWMH	2.0	-	5.0	V	
Input Low voltage	PWML	-0.3	-	0.5	V	
Input current	IPWM	-5	0	5	uA	VIN=5V(PWM1, PWM2)
【FAIL output(open drain)】						
FAIL Low voltage	VOL	0.05	0.10	0.20	V	IOL=1mA

(This product is not designed for protection against radioactive rays.)

○ Operation Notes

1) Absolute maximum ratings

An excess in the absolute maximum rating, such as supply voltage, temperature range of operating conditions, etc., can break down the devices, thus making impossible to identify breaking mode, such as a short circuit or an open circuit. If any over rated values will expect to exceed the absolute maximum ratings, consider adding circuit protection devices, such as fuses.

2) GND voltage

The potential of GND pin must be minimum potential in all condition. As an exception, the circuit design allows voltages up to -0.3 V to be applied to the ICT pin.

3) Thermal design

Use a thermal design that allows for a sufficient margin in light of the power dissipation (Pd) in actual operating conditions.

4) Inter-pin shorts and mounting errors

Use caution when positioning the IC for mounting on printed circuit boards. The IC may be damaged if there is any connection error or if pins are shorted together.

5) Actions in strong electromagnetic field

Use caution when using the IC in the presence of a strong electromagnetic field as doing so may cause the IC to malfunction.

6) Mutual impedance

Power supply and ground wiring should reflect consideration of the need to lower mutual impedance and minimize ripple as much as possible (by making wiring as short and thick as possible or rejecting ripple by incorporating inductance and capacitance).


7) Regarding input pin of the IC

This monolithic IC contains P+ isolation and P substrate layers between adjacent elements in order to keep them isolated. P-N junctions are formed at the intersection of these P layers with the N layers of other elements, creating a parasitic diode or transistor. For example, as shown in the figures below, the relation between each potential is as follows:

When $GND > Pin A$ and $GND > Pin B$, the P-N junction operates as a parasitic diode.

When $GND > Pin B$, the P-N junction operates as a parasitic transistor.

Parasitic diodes can occur inevitable in the structure of the IC. The operation of parasitic diodes can result in mutual interference among circuits, operational faults, or physical damage. Accordingly, methods by which parasitic diodes operate, such as applying a voltage that is lower than the GND (P substrate) voltage to an input pin, should not be used. Although the circuit design allows voltages up to -0.3 V to be applied to the ICT pin, voltages lower than this may cause the behavior described above. Use caution when designing the circuit.

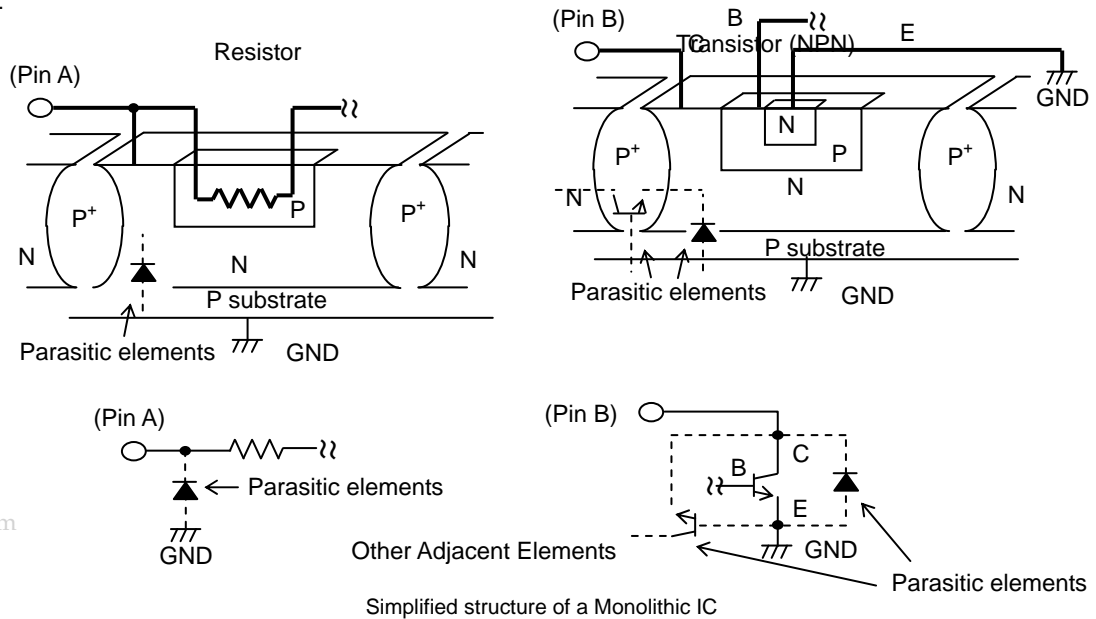

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>