



# SURFACE-MOUNT NPN POWER TRANSISTORS

**D70Y1.5T1**



**30 VOLTS  
1.5 AMP, 500 mWATTS**

Designed for audio frequency amplifier applications.

**Features:**

- Suitable for output stage of 3-Watt amplifier
- $P_D=1 \sim 2W$  (Mounted on ceramic substrate)
- Small flat package
- Complementary to D71Y1.5T1
- See page 840 for mounting and handling considerations.

**MARKING SYSTEM**

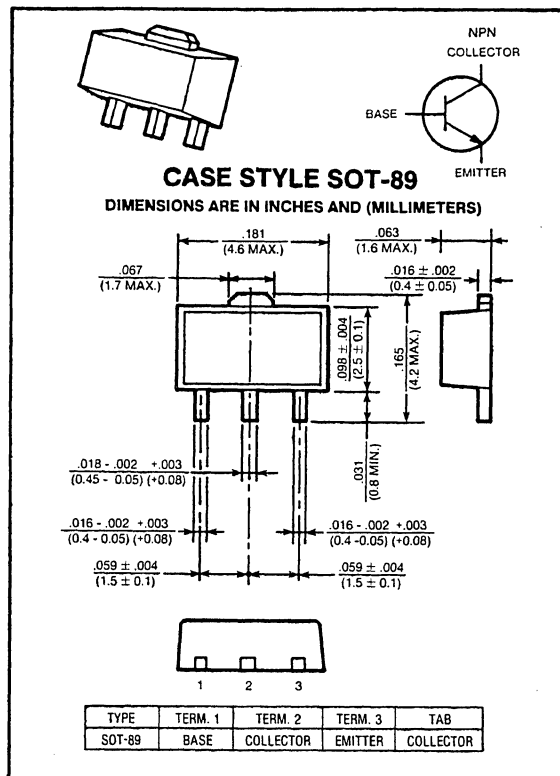

maximum ratings ( $T_A = 25^\circ C$ ) (unless otherwise specified)

RATING	SYMBOL	D70Y1.5T	UNITS
Collector-Emitter Voltage	$V_{CEO}$	30	Volts
Collector-Base Voltage	$V_{CBO}$	30	Volts
Emitter Base Voltage	$V_{EBO}$	5	Volts
Collector Current — Continuous	$I_C$	1.5	A
Base Current — Continuous	$I_B$	0.3	A
Total Power Dissipation @ $T_C = 25^\circ C$ @ $T_C = 25^\circ C^{(1)}$	$P_D$	500 1000	mWatts
Operating and Storage Junction Temperature Range	$T_J, T_{STG}$	-55 to +150	$^\circ C$

**thermal characteristics<sup>(2)</sup>**

- (1) Mounted on ceramic substrate (250mm<sup>2</sup> × 0.8t).
- (2) See page 841 for thermal considerations.

electrical characteristics ( $T_A = 25^\circ\text{C}$ ) (unless otherwise specified)

CHARACTERISTIC	SYMBOL	MIN	TYP	MAX	UNIT
----------------	--------	-----	-----	-----	------

off characteristics

Collector-Emitter Breakdown Voltage ( $I_C = 10\text{ mA}$ , $I_B = 0$ )	$V_{(BR)CEO}$	30	—	—	Volts
Collector Cut-off Current ( $V_{CB} = 30\text{V}$ , $I_E = 0$ )	$I_{CBO}$	—	—	100	nA
Emitter Cutoff Current ( $V_{EB} = 5\text{V}$ , $I_C = 0$ )	$I_{EBO}$	—	—	100	nA

on characteristics

DC Current Gain <sup>(3)</sup> ( $I_C = 500\text{mA}$ , $V_{CE} = 2\text{V}$ )	$h_{FE}$	100	—	320	—
Collector-Emitter Saturation Voltage ( $I_C = 1.5\text{A}$ , $I_B = 0.03\text{A}$ )	$V_{CE(sat)}$	—	—	2.0	V
Base-Emitter Voltage ( $V_{CE} = 2\text{V}$ , $I_C = 500\text{mA}$ )	$V_{BE(on)}$	—	—	1.0	V

(3) See page 44 for  $h_{FE}$  range.

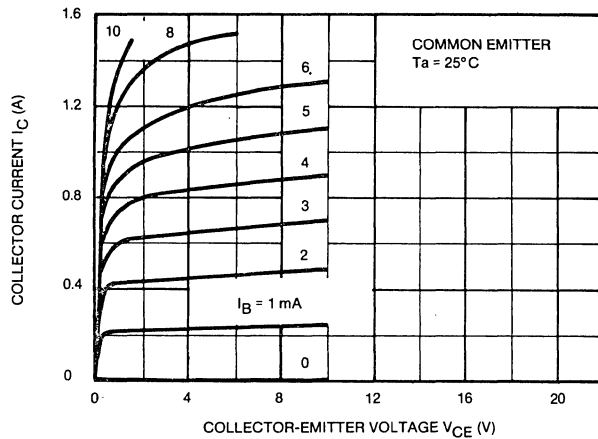


FIG. 1  $I_C - V_{CE}$

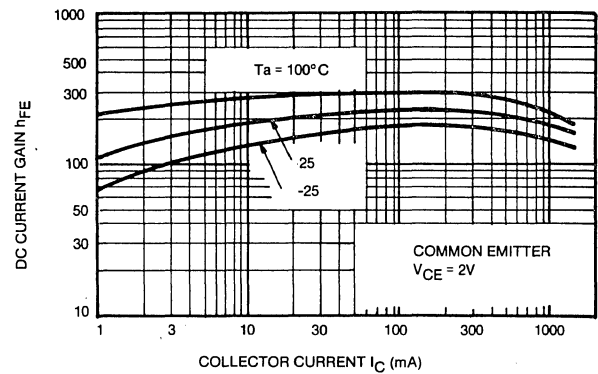


FIG. 2  $h_{FE} - I_C$

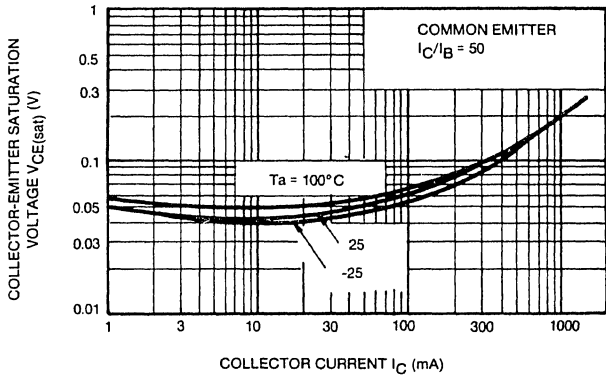


FIG. 3  $V_{CE(sat)} - I_C$

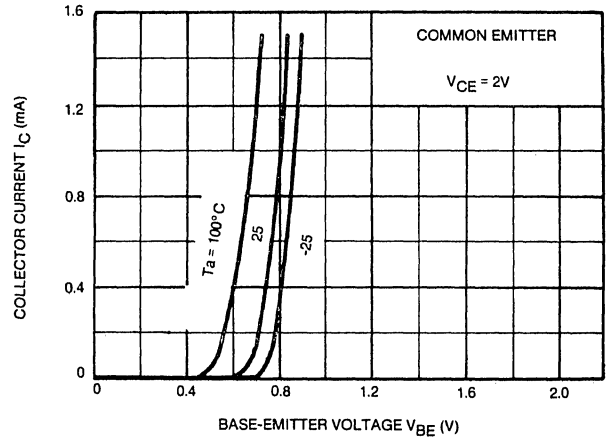


FIG. 4  $I_C - V_{BE}$

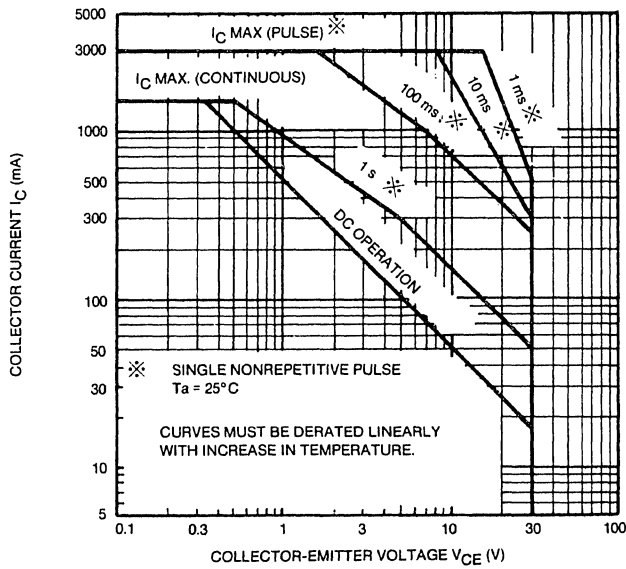


FIG. 5 SAFE OPERATING AREA

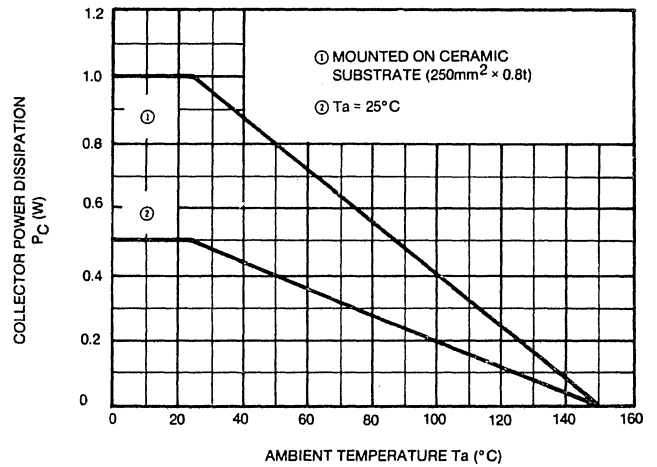


FIG. 6  $P_C - T_a$