

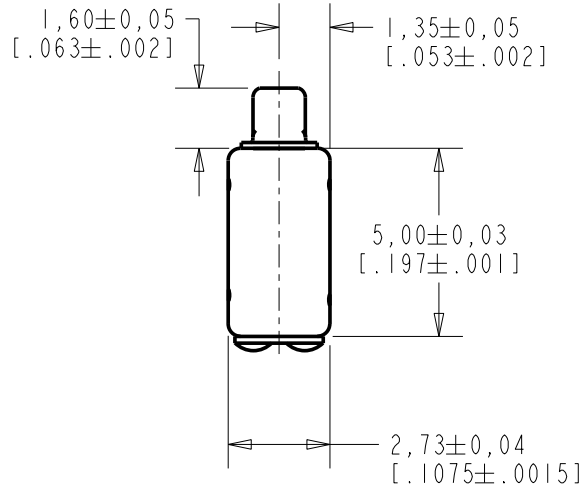


**FK-23466-000**

**SHT 1.1**

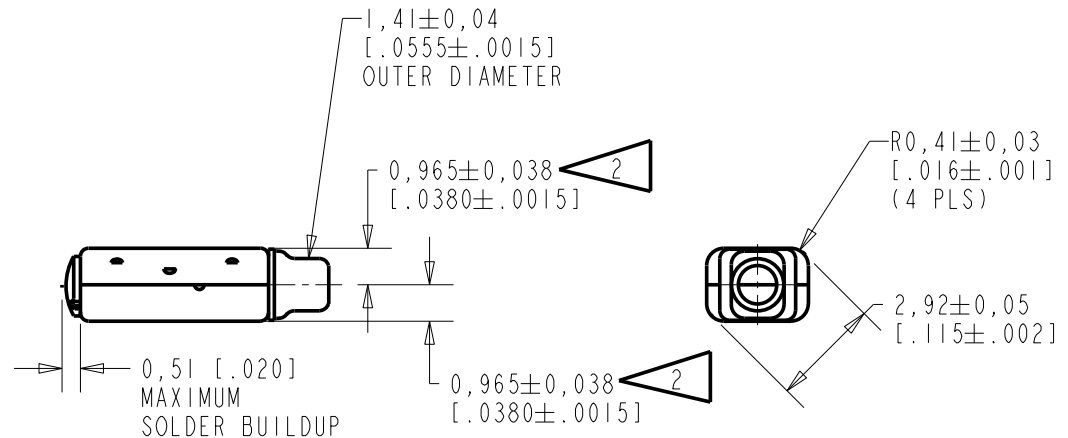

- NOTES:
- 1 A POSITIVE GOING VOLTAGE AT TERMINAL 2, RELATIVE TO TERMINAL 1, CAUSES A DECREASE IN PRESSURE AT THE SOUND OUTLET.
  - 2 LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER.

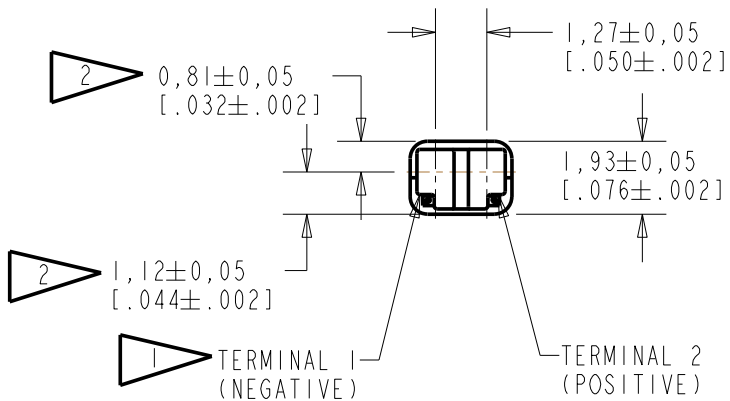

SCALE 2:1 DIMENSIONS IN MILLIMETERS [INCHES]


Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
C	CI0108259P	12-29-08	<b>Active</b>	<b>C</b>
B	CI0103994	3-22-06		
A	CI0103113	9-6-05		

SCALE:	<b>5:1</b>	DR. BY	DATE
DO NOT SCALE DRAWING		MMM	9-6-05
TITLE:	<b>RECEIVER</b>	GJP	9-12-05
	OUTLINE DRAWING	APP. BY	DATE
		GJP	9-12-05

**KNOWLES ELECTRONICS**  
ITASCA, ILLINOIS U.S.A.

**FK-23466-000**

**SHT 1.1**

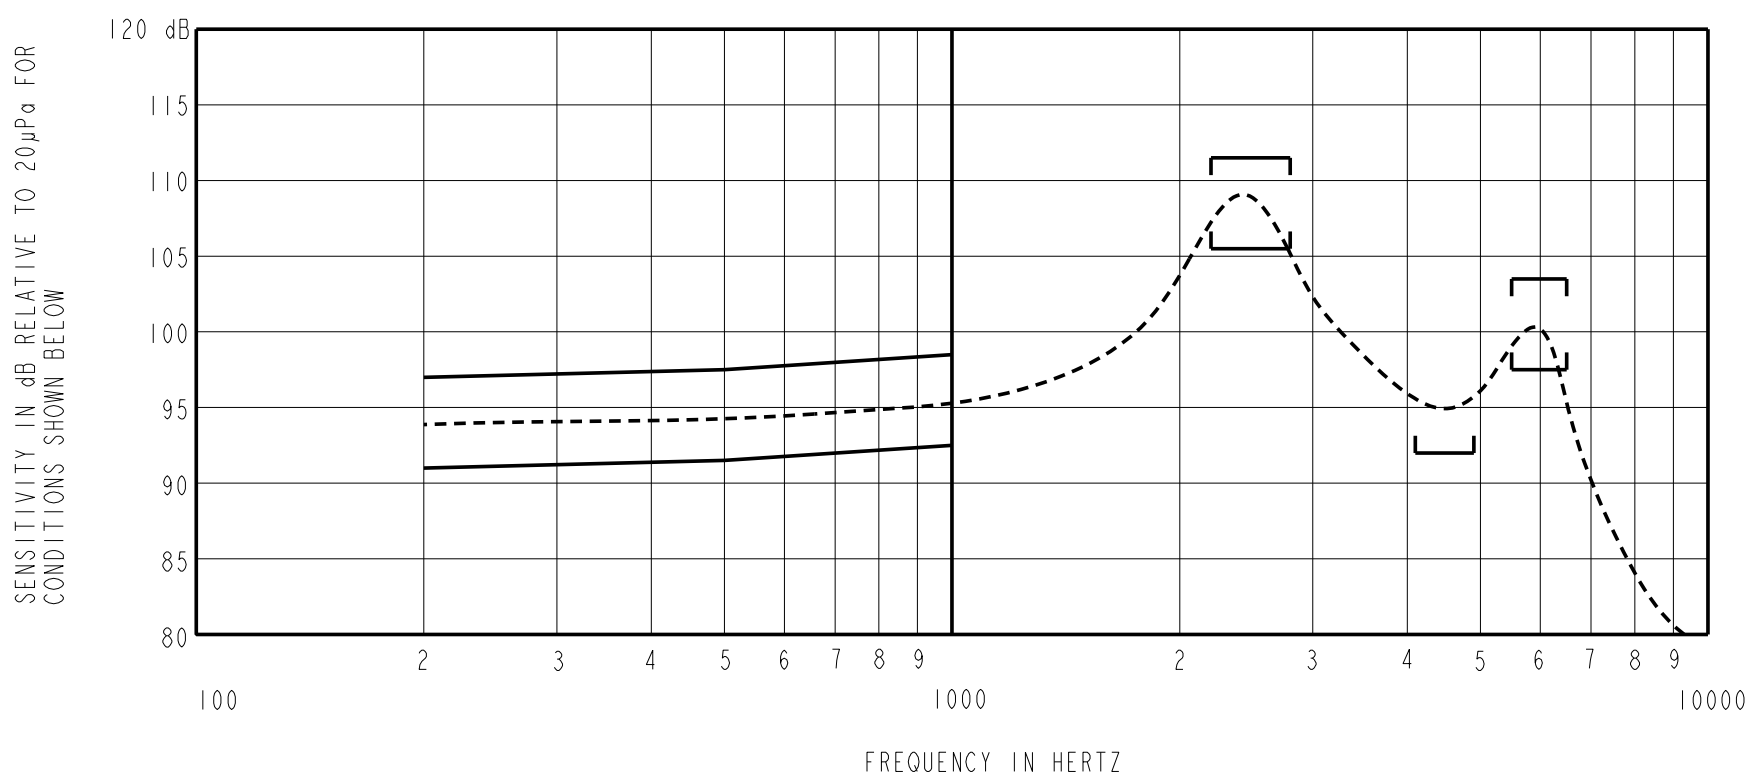

NOTES:

1. MEASUREMENTS MADE USING 10mm (.394") OF 1mm (.039") ID TUBE CONNECTED TO A SIMULATED ANSI S3.3-1960 TYPE HA-3 COUPLER. (T3420 AND B&K DB0138)

2. SENSITIVITY

FREQUENCY	MIN.	MAX.
200	91.0	97.0
500	91.5	97.5
1000	92.5	98.5
2200-2800	105.5	111.5
4100-4900	92.0	---
5500-6500	97.5	103.5

- 3. RESPONSE, IMPEDANCE, AND DISTORTION MEASUREMENTS MADE USING THE ELECTRICAL TEST CONDITIONS SHOWN BELOW.
- 4. ELECTRICAL SOURCE IMPEDANCE MUST BE GREATER THAN 20 TIMES 1kHz IMPEDANCE FOR TEST CONDITIONS SHOWN BELOW.
- 5. INDIVIDUAL SPECIFICATIONS.

PORT LOCATION	IMPEDANCE OHMS ±15%		DCR @20°C OHMS ±10%	DISTORTION		ELECTRICAL TEST CONDITIONS	
	1KHz	500Hz		MAX. %	FREQ Hz	AC mA RMS	DC mA
12S	630	450	360	5	800	0.50	0.71

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
C	C10108259P	12-29-08	Active	C
B	C10103994	3-22-06		
A	C10103113	9-6-05		

**KNOWLES ELECTRONICS**  
ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION

TITLE: **RECEIVER** **FK-23466-000**  
PERFORMANCE SPECIFICATION **SHT 2.1**

DR. BY	DATE
MMM	9-6-05
CK. BY	DATE
GJP	9-12-05
APP. BY	DATE
GJP	9-12-05