



FM1062/FM1062A
Low Voltage Transmission Circuits
with Dialler Interface with EMC

Specification

May. 2008

INFORMATION IN THIS DOCUMENT IS INTENDED AS A REFERENCE TO ASSIST OUR CUSTOMERS IN THE SELECTION OF SHANGHAI FUDAN MICROELECTRONICS CO., LTD PRODUCT BEST SUITED TO THE CUSTOMER'S APPLICATION; THEY DO NOT CONVEY ANY LICENSE UNDER ANY INTELLECTUAL PROPERTY RIGHTS, OR ANY OTHER RIGHTS, BELONGING TO SHANGHAI FUDAN MICROELECTRONICS CO., LTD OR A THIRD PARTY. WHEN USING THE INFORMATION CONTAINED IN THIS DOCUMENTS, PLEASE BE SURE TO EVALUATE ALL INFORMATION AS A TOTAL SYSTEM BEFORE MAKING A FINAL DECISION ON THE APPLICABILITY OF THE INFORMATION AND PRODUCTS. SHANGHAI FUDAN MICROELECTRONICS CO., LTD ASSUMES NO RESPONSIBILITY FOR ANY DAMAGE, LIABILITY OR OTHER LOSS RESULTING FROM THE INFORMATION CONTAINED HEREIN. SHANGHAI FUDAN MICROELECTRONICS CO., LTD PRODUCTS ARE NOT INTENDED FOR USE IN MEDICAL, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS. THE PRIOR WRITTEN APPROVAL OF SHANGHAI FUDAN MICROELECTRONICS CO., LTD IS NECESSARY TO REPRINT OR REPRODUCE IN WHOLE OR IN PART THESE DOCUMENTS. Future routine revisions will occur when appropriate, without notice. Contact Shanghai Fudan Microelectronics Co., Ltd sales office to obtain the latest specifications and before placing your product order. Please also pay attention to information published by Shanghai Fudan Microelectronics Co., Ltd by various means, including Shanghai Fudan Microelectronics Co., Ltd home page (<http://www.fmsh.com/>).

Please contact Shanghai Fudan Microelectronics Co., Ltd local sales office for the specification regarding the information in this documents or Shanghai Fudan Microelectronics Co., Ltd products.

Trademarks

Shanghai Fudan Microelectronics Co., Ltd name and logo, the “复旦” logo are trademarks or registered trademarks of Shanghai Fudan Microelectronics Co., Ltd or its subsidiaries in China.

Shanghai Fudan Microelectronics Co., Ltd, Printed in the China, All Rights Reserved.

Product Overview

Instruction

The FM1062 and FM1062A are integrated circuits that perform all speech and line interface functions required in fully electronic telephone sets. They perform electronic switching between dialling and speech. The ICs operate at line voltage down to 1.6 V DC (with reduced performance) to facilitate the use of more telephone sets connected in parallel. FM1062 / FM1062A improve the EMC performance in-circuit which can enhance the telephone sets' EMC.

Features

- ◆ Low DC line voltage; operates down to 1.6 V (excluding polarity guard)
- ◆ Voltage regulator with adjustable static resistance
- ◆ Provides a supply for external circuits
- ◆ Symmetrical high-impedance inputs (64K Ω) for dynamic, magnetic or piezoelectric microphones
- ◆ Asymmetrical high-impedance input (32K Ω) for electrets microphones
- ◆ DTMF signal input with confidence tone
- ◆ Mute input for pulse or DTMF dialling
 - FM1062: active HIGH (MUTE)
 - FM1062A: active LOW (MUTE)
- ◆ Receiving amplifier for dynamic, magnetic or piezoelectric earpieces
- ◆ Large gain setting ranges on microphone and earpiece amplifiers
- ◆ Line loss compensation (line current dependent) for microphone and earpiece amplifiers
- ◆ Gain control curve adaptable to exchange supply
- ◆ DC line voltage adjustment facility
- ◆ enhanced EMC performance

Block Diagram


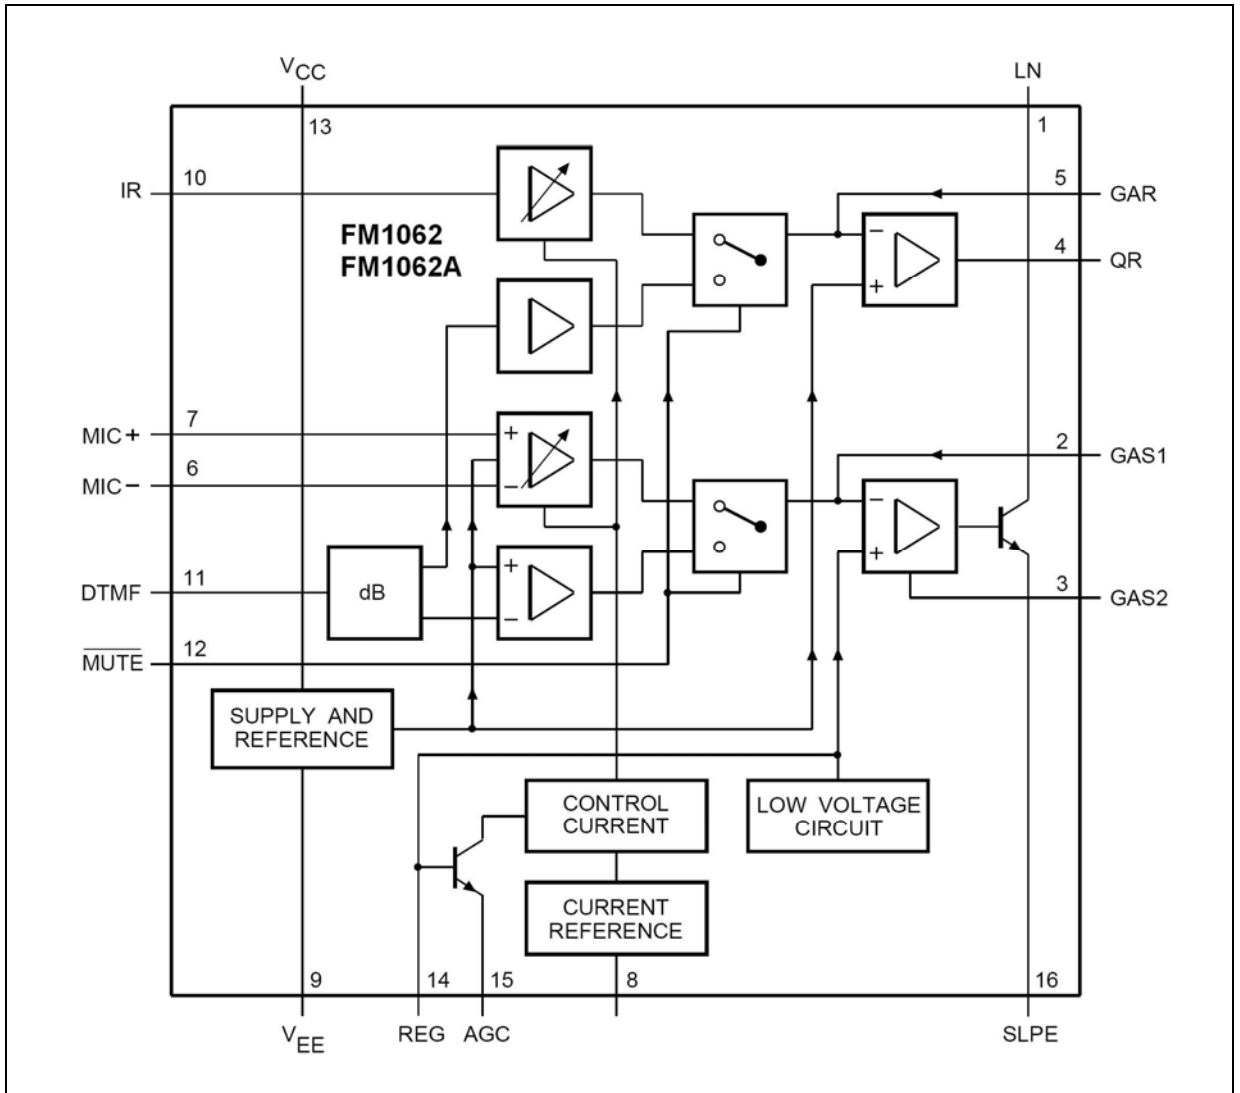


Figure 1 Block Diagram

Pin Configurations

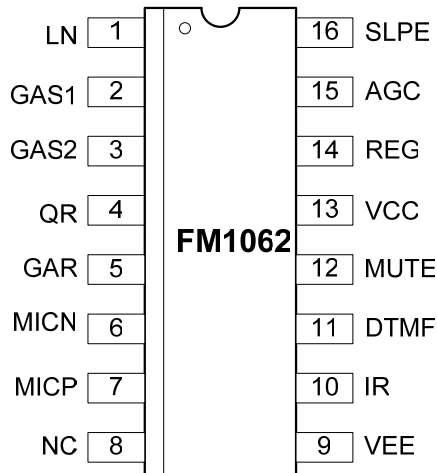

Pin Definitions

SYMBOL	PIN	DESCRIPTION
LN	1	positive line terminal
GAS1	2	gain adjustment; transmitting amplifier
GAS2	3	gain adjustment; transmitting amplifier
QR	4	non-inverting output; receiving amplifier
GAR	5	gain adjustment; receiving amplifier
MIC-	6	inverting microphone input
MIC+	7	non-inverting microphone input
NC	8	NC
VEE	9	negative line terminal
IR	10	receiving amplifier input
DTMF	11	dual-tone multi-frequency input
MUTE	12	mute input (see note 1)
VCC	13	positive supply decoupling
REG	14	voltage regulator decoupling
AGC	15	automatic gain control input
SLPE	16	slope (DC resistance) adjustment

Note:

Pin 12 is active HIGH (MUTE) for FM1062 and LOW (MUTE) for FM1062A.

Function Description

Supplies VCC, LN, SLPE, REG

Power for the IC and its peripheral circuits is usually obtained from the telephone line. The supply voltage is derived from the line via a dropping resistor and regulated by the IC. The supply voltage V_{CC} may also be used to supply external circuits e.g. dialling and control circuits. Decoupling of the supply voltage is performed by a capacitor between V_{CC} and V_{EE} . The internal voltage regulator is decoupled by a capacitor between REG and V_{EE} . The DC current flowing into the set is determined by the exchange supply voltage V_{exch} , the feeding bridge resistance R_{exch} and the DC resistance of the telephone line R_{line} .

At line currents below 9 mA the internal reference voltage is automatically adjusted to a lower value (typically 1.6 V at 1 mA). This means that more sets can be operated in parallel with DC line voltages (excluding the polarity guard) down to an absolute minimum voltage of 1.6 V. At line currents below 9 mA the circuit has limited sending and receiving levels. The internal reference voltage can be adjusted by means of an external resistor (R_{VA}). This resistor when connected between LN and REG will decrease the internal reference voltage and when connected between REG and SLPE will increase the internal reference voltage.

Microphone Inputs MIC+ and MIC- and Gain Pins GAS1 and GAS2

The circuit has symmetrical microphone inputs. Its input impedance is $64k\Omega$ ($2 \times 32k\Omega$) and its voltage gain is typically 52 dB (when $R7 = 68k\Omega$, see Figures 2 and 3). Dynamic, magnetic, piezoelectric or electrets (with built-in FET source followers) can be used. The gain of the microphone amplifier can be adjusted between 44 dB and 52 dB to suit the sensitivity of the transducer in use. The gain is proportional to the value of $R7$ which is connected between GAS1 and GAS2.

Input MUTE (FM1062)

When MUTE is HIGH the DTMF input is enabled and the microphone and receiving amplifier inputs are inhibited. The reverse is true when MUTE is LOW or open-circuit. MUTE switching causes only negligible clicking on the line and earpiece output. If the number of parallel sets in use causes a drop in line current to below 6 mA the speech amplifiers remain active independent to the DC level applied to the MUTE input.

Input MUTE (FM1062A)

When MUTE is LOW or open-circuit, the DTMF input is enabled and the microphone and receiving amplifier inputs are inhibited. The reverse is true when MUTE is HIGH. MUTE switching causes only negligible clicking on the line and earpiece output. If the number of parallel sets in use causes a drop in line current to below 6 mA the DTMF amplifier becomes active independent to the DC level applied to the MUTE input.

Dual-tone Multi-frequency Input DTMF

When the DTMF input is enabled dialling tones may be sent on to the line. The voltage gain from DTMF to LN is typically 25.5 dB (when $R7 = 68 \text{ k}\Omega$) and varies with $R7$ in the same way as the microphone gain. The signaling tones can be heard in the earpiece at a low level (confidence tone).

Receiving Amplifier IR, QR and GAR

The receiving amplifier has one input (IR) and a non-inverting output (QR). The IR to QR gain is typically 31 dB (when $R4 = 100 \text{ k}\Omega$). It can be adjusted between 20 and 31 dB to match the sensitivity of the transducer in use. The gain is set with the value of $R4$ which is connected between GAR and QR. The overall receive gain, between LN and QR, is calculated by subtracting the anti-sidetone network attenuation (32 dB) from the amplifier gain. The output voltage of the receiving amplifier is specified for continuous-wave drive. The maximum output voltage will be higher under speech conditions where the peak to RMS ratio is higher.

Automatic Gain Control input AGC

Automatic line loss compensation is achieved by connecting a resistor ($R6$) between AGC and V_{EE} . The automatic gain control varies the gain of the microphone amplifier and the receiving amplifier in accordance with the DC line current. The control range is 5.8 dB which corresponds to a line length of 5 km for a 0.5 mm diameter twisted-pair copper cable with a DC resistance of 176 Ω/km and average attenuation of 1.2 dB/km. Resistor $R6$ should be chosen in accordance with the exchange supply voltage and its feeding bridge resistance. The ratio of start and stop currents of the AGC curve is independent of the value of $R6$. If no automatic line-loss compensation is required the AGC pin may be left open-circuit. The amplifiers, in this condition, will give their maximum specified gain.

Enhanced EMC performance

The input pins FM1062 / FM1062A are added RC filters to improve the EMC performance, so the telephone sets which used FM1062 / FM1062A are easily to handle the EMC design. .

Absolute Maximum Ratings

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{LN}	positive continuous line voltage			12	V
$V_{LN} (R)$	repetitive line voltage during switch-on or line interruption			13.2	V
$V_{LN} (RM)$	repetitive peak line voltage for a 1 ms pulse per 5 s	R9 = 20 Ω ; R10 = 13 Ω ; see Figure6		28	V
I_{line}	line current	R9 = 20 Ω		140	mA
P_{tot}	total power dissipation	R9 = 20 Ω		600	mW
T_{amb}	operating ambient temperature		-25	+75	$^{\circ}C$
T_{stg}	storage temperature		-40	+125	$^{\circ}C$

Characteristics

$I_{line} = 11$ to 140mA; $V_{EE} = 0V$; $f = 800Hz$; $T_{amb} = 25^{\circ}C$; Unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_{LN}	voltage drop over circuit between LN	MIC inputs open-circuit	3.55	4.0	4.25	V
		$I_{line} = 15$ mA $I_{line} = 100$ mA	4.9	5.7	6.5	V
I_{CC}	supply current	VCC = 2.8 V		0.9	1.35	mA
V_{CC}	supply voltage available for peripheral circuitry	$I_{line} = 15$ mA; MUTE = HIGH; $I_P = 1.2$ mA	1.9	2.7	3.5	V
		MUTE = HIGH; $I_P = 0$ mA	2.5	3.4	3.8	V
		MUTE = LOW; $I_P = 1.2$ mA	2.2	2.7	4.5	V
		MUTE = LOW; $I_P = 0$ mA	2.5	3.4	3.8	V
G_V MIC	voltage gain MIC+ MIC- to LN	$I_{line} = 15$ mA; R7 = 68 k Ω	50.5	52.0	54.5	dB
		$I_{line} = 100$ mA; R7 = 68 k Ω	44.0	45.5	47.0	dB
G_V DTMF	voltage gain from DTMF to LN	$I_{line} = 15$ mA; R7 = 68 k Ω	24.0	25.5	27.0	dB
$V_{LN} (rms)$	output voltage (RMS value)	THD = 10%; $I_{line} = 15$ mA	1.7	2.3		V
G_V RA	voltage gain from IR to QR	$I_{line} = 15$ mA; $R_L = 300\Omega$	29.5	31	32.5	dB
		$I_{line} = 100$ mA; $R_L = 300\Omega$	24.5	26	27.5	dB
$V_O (rms)$	output voltage (RMS value)	THD = 2%; sine wave drive; R4 = 100 k Ω ; $I_{line} = 15$ mA; $I_P = 0$ mA; $R_L = 150\Omega$	0.22	0.33		V
		$R_L = 450$	0.3	0.48		V

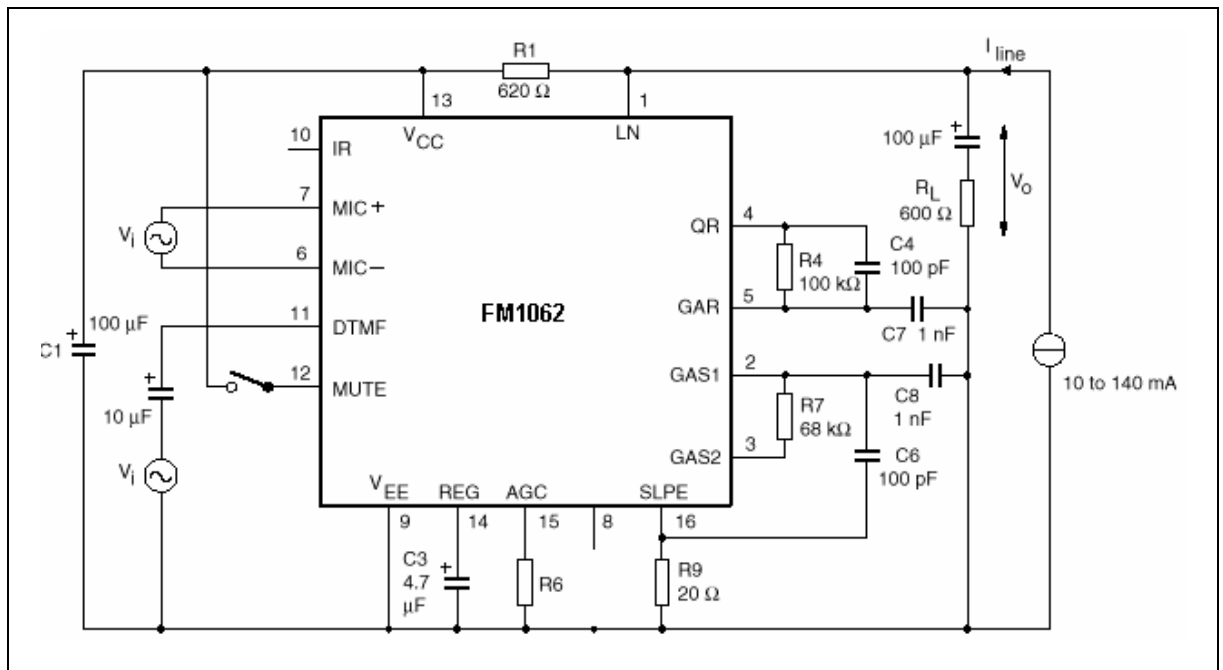


Figure 2 Test circuit for defining FM1062 voltage gain of MIC+, MIC- and DTMF inputs

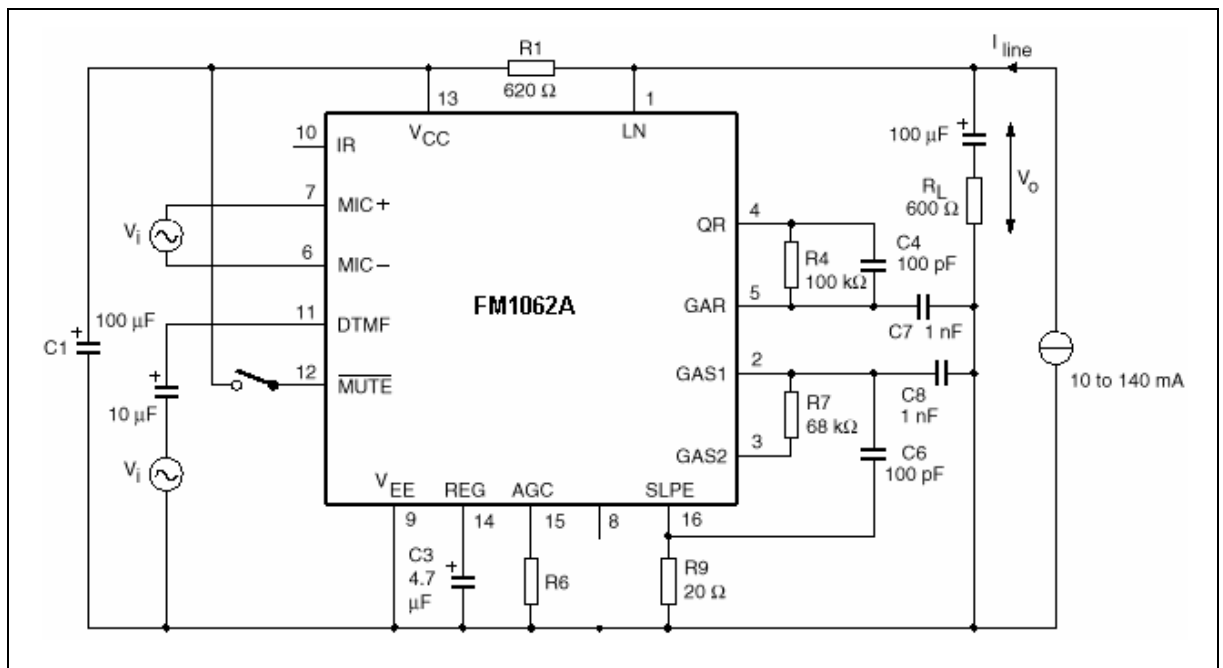


Figure 3 Test circuit for defining FM1062A voltage gain of MIC+, MIC- and DTMF inputs

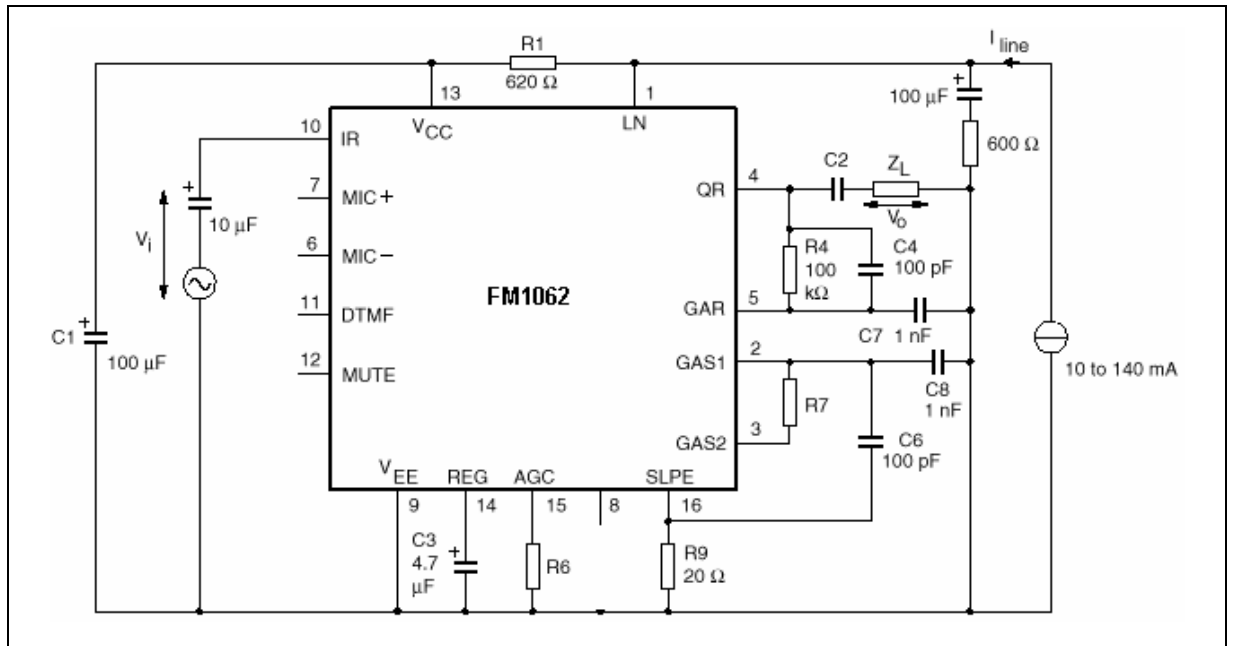


Figure 4 Test circuit for defining FM1062 voltage gain of receiving amplifier

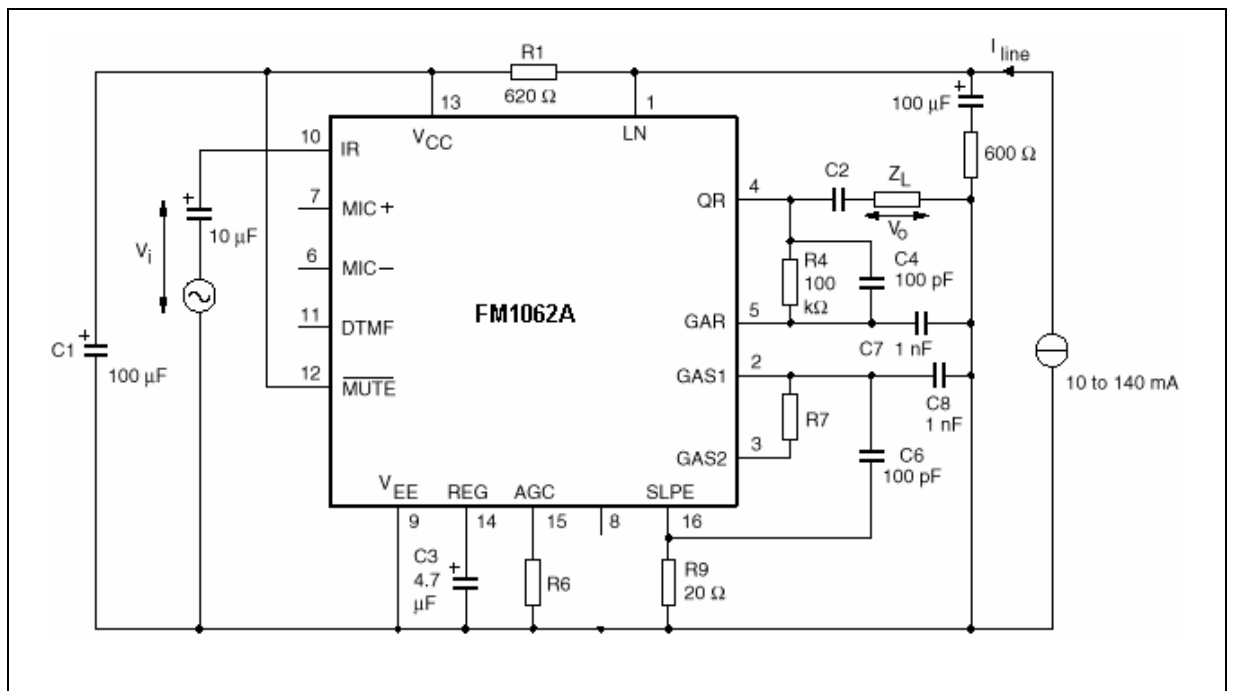


Figure 5 Test circuit for defining FM1062A voltage gain of receiving amplifier

Application Circuit

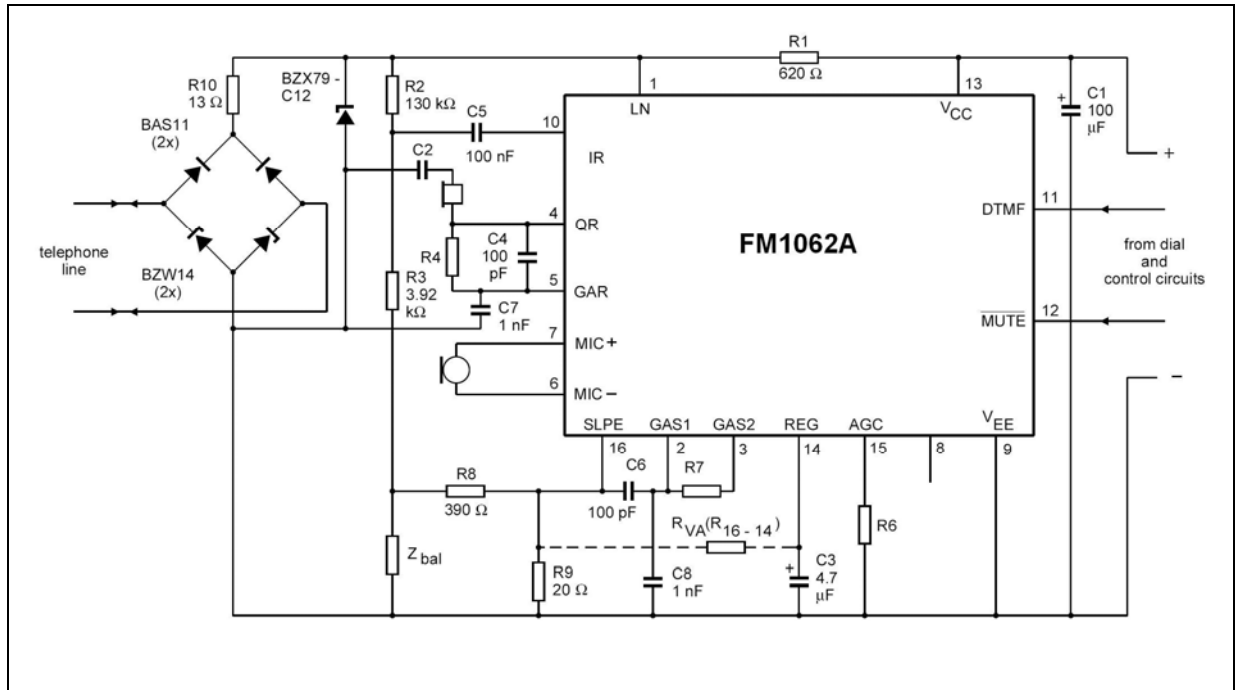


Figure 6 Typical application of FM1062A

Note: Pin 12 is active HIGH (MUTE) for FM1062 and LOW (MUTE) for FM1062A.

Revision History

Version	Publication date	Pages	Paragraph or Illustration	Revise Description
1.0	Oct. 2001	6		Initial Release.
2.0	Oct. 2007	13		Updated Format.
2.1	May. 2008	13	Sales and service	Updated the address of HK office.

Sales and Service

Shanghai Fudan Microelectronics Co., Ltd.

Address: Bldg No. 4, 127 Guotai Rd,
Shanghai City China.

Postcode: 200433

Tel: (86-21) 6565 5050

Fax: (86-21) 6565 9115

Shanghai Fudan Microelectronics (HK) Co., Ltd.

Address: Unit 506, 5/F., East Ocean Centre, 98 Granville Road,
Tsimshatsui East, Kowloon, Hong Kong

Tel: (852) 2116 3288 2116 3338

Fax: (852) 2116 0882

Beijing Office

Address: Room.1208, Bldg C,
Zhongguancun Science and Technology Development Edifice,
34 zhongguancun Street (South),
Hai Dian District, Beijing City, China.

Tel: (86-10) 6212 0682 6213 9558

Fax: (86-10) 6212 0681

Shenzhen Office

Address: Room.1301, Century Bldg, Shengtingyuan Hotel,
Huaqiang Rd (North),
Shenzhen City, China.

Tel: (86-755) 8335 1011 8335 0911

Fax: (86-755) 8335 9011

Web Site: <http://www.fmsk.com/>