

# GP1L06

Wide Gap Type, High Sensitivity Photointer-  
rupter

T-41-73

## ■ Features


1. Wide gap between light emitter and detector : 5mm
2. High sensing accuracy (slit width : 0.5mm)
3. High current transfer ratio  
(CTR : MIN. 30% at  $I_F = 1\text{mA}$ )
4. PWB direct mounting type package

## ■ Applications

1. Copiers, printers, facsimiles
2. Automatic vending machines

## ■ Outline Dimensions

(Unit : mm)

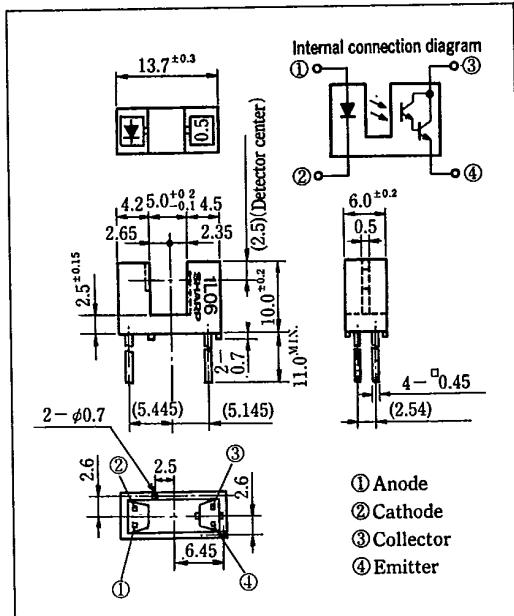

## ■ Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Input	Forward current	$I_F$	mA
	*1 Peak forward current	$I_{FM}$	A
	Reverse voltage	$V_R$	V
	Power dissipation	$P$	mW
Output	Collector-emitter voltage	$V_{CEO}$	V
	Emitter-collector voltage	$V_{ECO}$	V
	Collector current	$I_c$	mA
	Collector power dissipation	$P_c$	mW
Operating temperature		$T_{opr}$	°C
Storage temperature		$T_{stg}$	°C
*2 Soldering temperature		$T_{sol}$	°C

\*1 Pulse width  $\leq 100\mu\text{s}$ , Duty ratio = 0.01

\*2 For 5 seconds

## ■ Electro-optical Characteristics

T-41-13 (Ta=25°C)

	Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	$V_F$	$I_F = 20\text{mA}$	—	1.2	1.4	V
	Peak forward voltage	$V_{FM}$	$I_{FM} = 0.5\text{A}$	—	3	4	V
	Reverse current	$I_R$	$V_R = 3\text{V}$	—	—	10	$\mu\text{A}$
Output	Collector dark current	$I_{CEO}$	$V_{CE} = 10\text{V}$	—	—	$10^{-6}$	A
Transfer characteristics	Current transfer ratio	CTR	$I_F = 1\text{mA}$ , $V_{CE} = 2\text{V}$	30	—	2,000	%
	Collector-emitter saturation voltage	$V_{CE(\text{sat})}$	$I_F = 2\text{mA}$ , $I_C = 0.3\text{mA}$	—	—	1.0	V
	Response time (Rise)	$t_r$	$V_{CE} = 2\text{V}$ , $I_C = 2\text{mA}$	—	130	400	$\mu\text{s}$
	Response time (Fall)	$t_f$	$R_L = 100\Omega$	—	100	350	$\mu\text{s}$

Fig. 1 Forward Current vs. Ambient Temperature

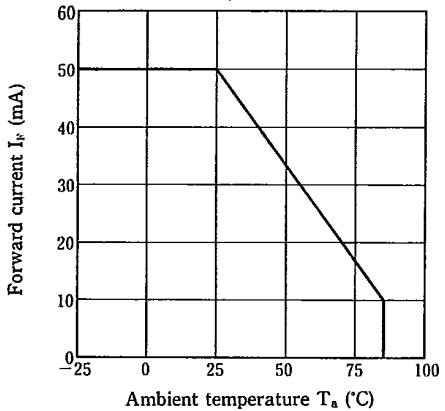


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

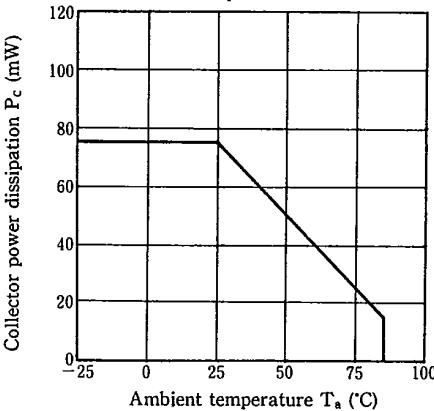


Fig. 3 Peak Forward Current vs. Duty Ratio



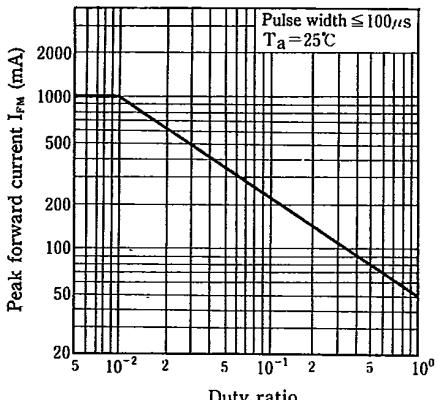



Fig. 4 Forward Current vs. Forward Voltage

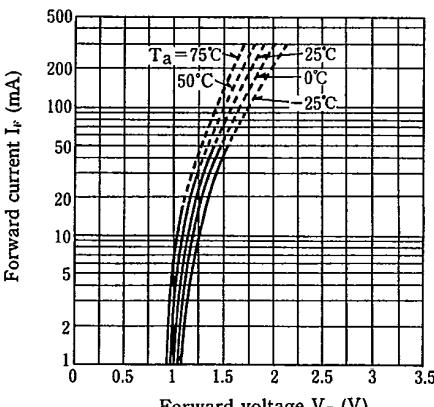


**Fig. 5 Collector Current vs. Forward Current**

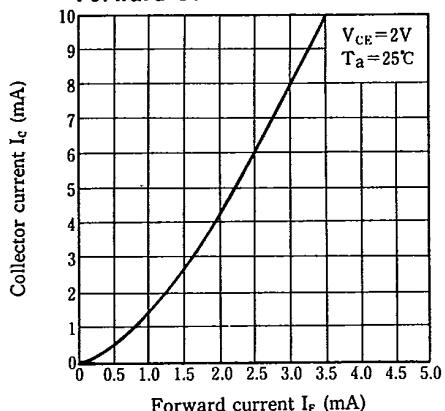


**Fig. 7 Collector Current vs. Ambient Temperature**

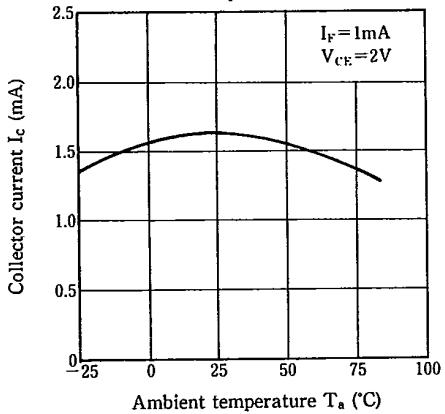


**Fig. 9 Response Time vs. Load Resistance**

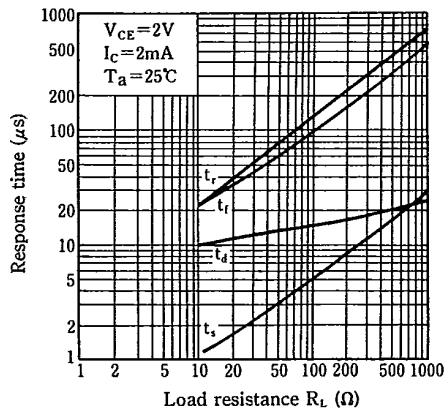


**Fig. 6 Collector Current vs. Collector-emitter Voltage**

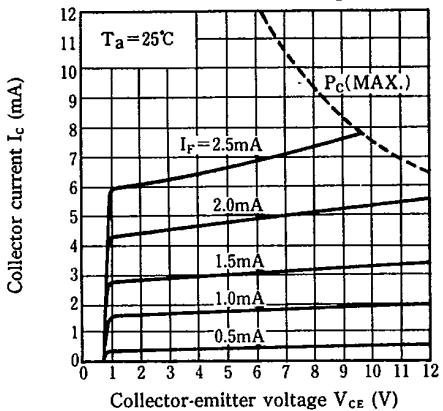


**Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature**

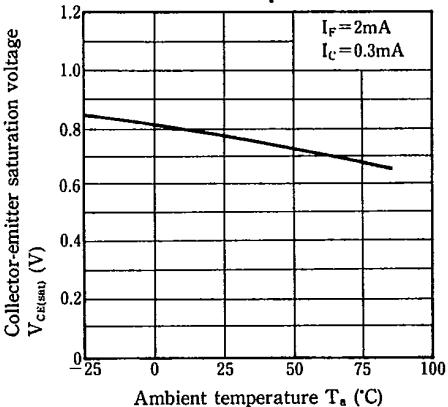


**Test Circuit for Response Time**

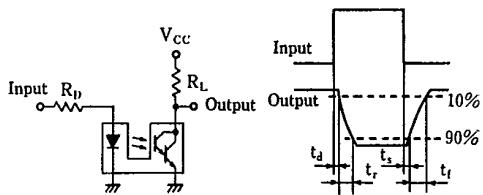


**Fig. 10 Frequency Response**

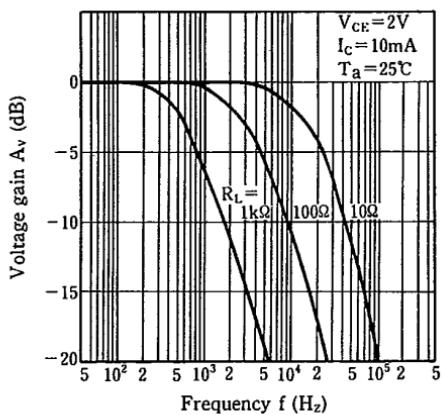

**Fig. 12 Relative Collector Current vs. Shield Distance (1)**

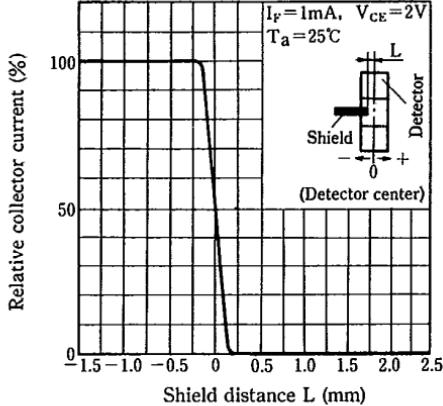

**Fig. 11 Collector Dark Current vs. Ambient Temperature**

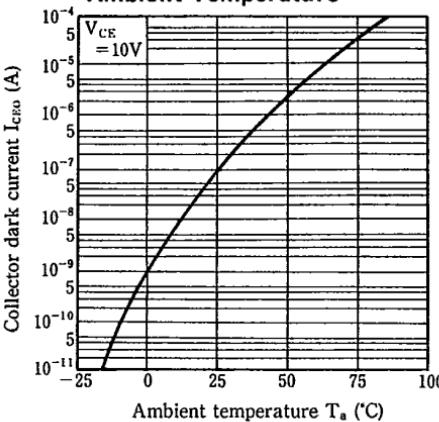

**Fig. 13 Relative Collector Current vs. Shield Distance (2)**

