KBJ6005 THRU KBJ610

Single Phase 6.0 AMPS. Glass Passivated Bridge Rectifiers
Voltage Range 50 to 1000 Volts

Current 6.0 Amperes

4KBJ

FEATURES

◆Ideal for printed circuit board

◆ Reliable low cost construction technique results in inexpensive product


◆High temperature soldering guaranteed: 260°C / 10 seconds / 0.375" (9.5mm) lead length at 5 lbs., (2.3 kg) tension

♦UL Recognized File number: E347215

MECHANICAL DATA

◆Case: Molded plastic ◆Lead: solder plated

◆Polarity: As marked



Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%

Type Number		KBJ6005	KBJ601	KBJ602	KBJ604	KBJ606	KBJ608	KBJ610	UNITS
Maximum Repetitive Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current See Fig.2	I(AV)	6.0						A	
Peak Forward Surge Current, 8.3 ms Single									
Half Sine-wave Superimposed on Rated	Ifsm	IFSM 150							A
Load (JEDEC method)									
Maximum Instantaneous Forward Voltage @ 6.0A	VF	1.0						V	
Maximum DC Reverse Current @ Ta=25°C		5.0							μΑ
rated DC blocking voltage per leg TA = 125 °C	IR	500							
Typical Thermal Resistance (Note)	RөJC	1.8						°C/W	
Operating Temperature Range	TJ	-55 to +150							$^{\circ}$
Storage Temperature Range	Tstg	-55 to +150						$^{\circ}$ C	

NOTE: Thermal Resistance from Junction to Case with Device Mounted on 75×75×1.6mm Cu Plate Heatsink


1





KBJ6005 THRU KBJ610


Single Phase 6.0 AMPS. Glass Passivated Bridge Rectifiers Voltage Range 50 to 1000 Volts Current 6.0 Amperes

RATING AND CHARACTERISTIC CURVES KBJ6005 THRU KBJ610





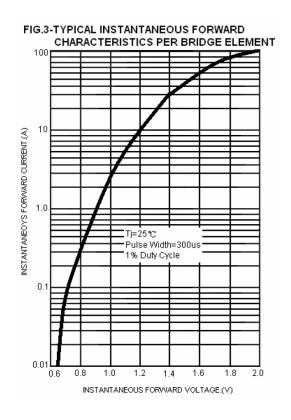

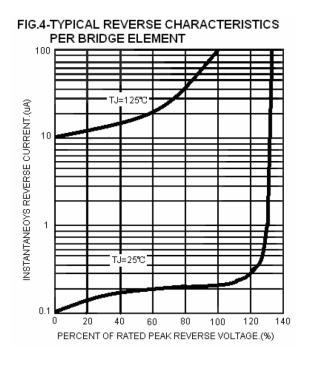

Note: Specification are subject to change without notice. For more detail and update, please visit our website.